

EDCON-COMPONENTS




Characteristics

Item	Characteristics	Test Method
Operating Temperature	. -40°C ~ + 200°C	
Temperature Coefficient	. +/- 350ppm/°C	JIS-C 5202; 5.2
Short Time overload	. +/- 1%	Rating Voltage x 2,5 or Max. overload for 5 sec.
Pulse Overload	. +/- 2%	Rating voltage x 4 or max. pulse overload voltage for 10.000 cycle (1 sec. "on" 25 sec. "off")
Temperature cycling	. +/- 1%	. -55°C (30min) / +85°C (30min) for 5 cycle
Load Life Humidity	. +/- 5%	40°C +/- 2°C, 90%~95% R, 1000h, 1,5h "on" / 0,5h "off" cycle
Load Life Humidity	. +/- 5%	70°C +/- 2°C, 1000h 1,5 "on" / 0,5h "off" cycle
Resistance to soldering heat	. +/- 2%	260°C +/- 5°C, 5sec +/- 1 sec
Solderability	90% Coverage/ Min	235°C +/- 5°C, 2sec +/- 0,5sec
Bending Test	. +/- 1%	Holding point width 90mm Bending 5mm, 1 time
Non-Combustibility	The resistor shall withstand Overload test in accordance with Article UL 94, V-0 without producing a fire hazard.	

Technical Informations

Serie	Size	Dimensions (mm)			S	
		L	D	C	Max.	Min
X23020	0411	11,2 / +/-0,3	4,7 / +/-0,3	2,6 / +/-0,2	0,5 / +/- 0,1	

Technical Drawing Case

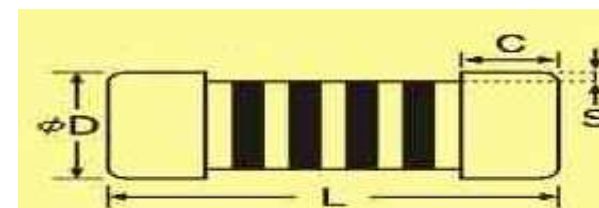

Packing Informations

Serie	Size	Tape/Reel	Bulk	Carton
X23020	0411	1500PCS	-----	-----

Metal Oxide Film Melf Resistor Size 0411

Part No.: **X23020**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4

EDCON-COMPONENTS



Range Specification Value

Serie	Size	Ordering Code Power	Power Rating	Max. Rating Voltage	Max.Overload Voltage	Tolerance	
						2%	5%
X23020	0411	D	1,0W	400	700	0,5R ~ 100K	0,5R ~ 100K
		E	2,0W	400	700	0,5R ~ 100K	0,5R ~ 100K

**Metal Oxide Film Melf
Resistor Size 0411**

Part No.: **X23020**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 4		

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Range Code	Ordering Power Code	T.C.R Code	Tolerance Code	ROHS	Packing Code				
X23020	471	D	5	J	R	TR15				

471= 470 Ohm Resistance Range	D= 1,0W	5= 350ppm	G= Tol. +/- 2%	R= ROHS Conform	TR15= Tape Reel 1500PCS
	E= 2,0W		J= Tol. +/- 5%	N= NON ROHS	
BU05= Bulk Ware 500PCS					

**Metal Oxide Film Melf
Resistor Size 0411**

Part No.: **X23020**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 4		

EDCON-COMPONENTS




Soldering Profile Curve

Soldering Profile for Lead Soldering

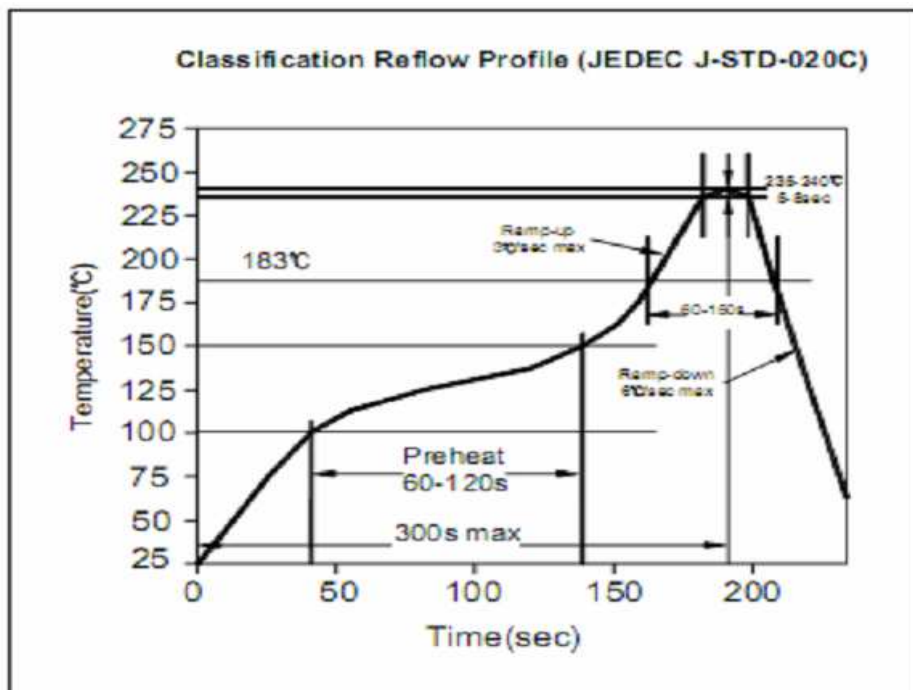

Soldering Profile for Lead Free Soldering

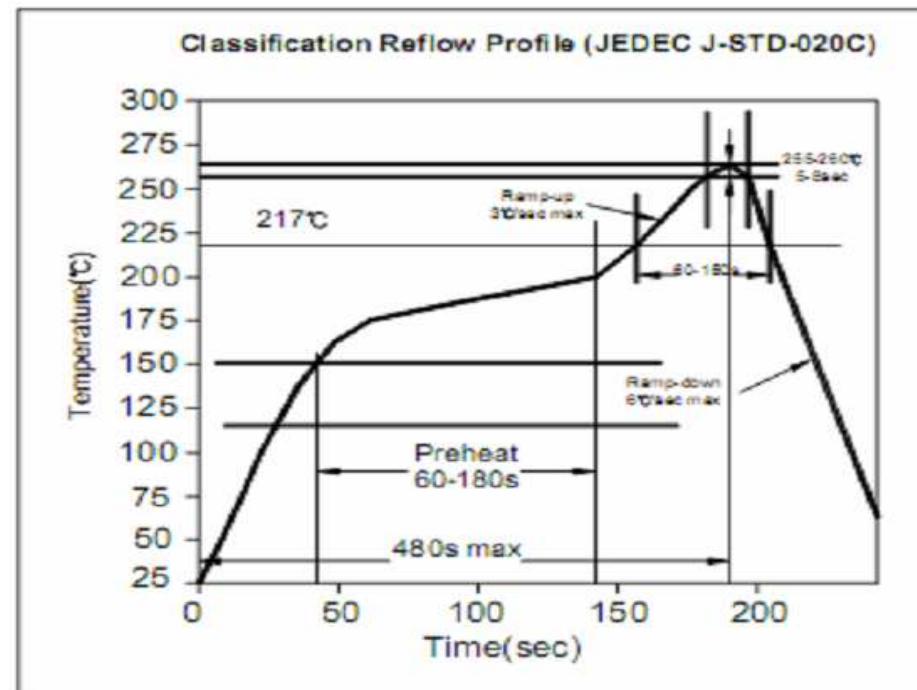

**Metal Oxide Film Melf
Resistor Size 0411**

Part No.: **X23020**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4		

www.edcon-components.com

email: info@edcon-components.com