

**Technical Specification**

Insulator Material: LCP + 30% GF UL94V-0  
 Contact Resistance: 30m Ohm max.  
 Insulator Resistance: 5000 M Ohm max.  
 Temperature Rating: -55°C ~ 105°C  
 Contact Material: Phosphor Bronze  
 Contact: Tin Plated / Gold Flash  
 Durability: 50 Cycles min.  
 Application for: Lithium Coin Type  
 Battery Dimension: D= 19,80mm / T=3,2mm


**Ordering Information**

Serie	Contact Material	Contact Plating	ROHS	Packing		
-------	------------------	-----------------	------	---------	--	--

<b>B23003</b>	<b>PB</b>	<b>GF</b>	<b>R</b>	<b>TY</b>		
---------------	-----------	-----------	----------	-----------	--	--



<b>PB=</b> Phosphor Bronze	<b>GF=</b> Gold Flash	<b>N=</b> Non ROHS	<b>TR=</b> Tape Reel
	<b>TN=</b> Tin plated	<b>R=</b> ROHS Conform	<b>TY=</b> Tray

<b>Battery Coin Cell Holder</b>							
Part No.:	<b>B23003</b>						
Customer:							
DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	03.04.2009
APPD:	Join			FINISH	Shieh	Sheet	1 from 3



**Technical Dimensions**

**PCB Layout**

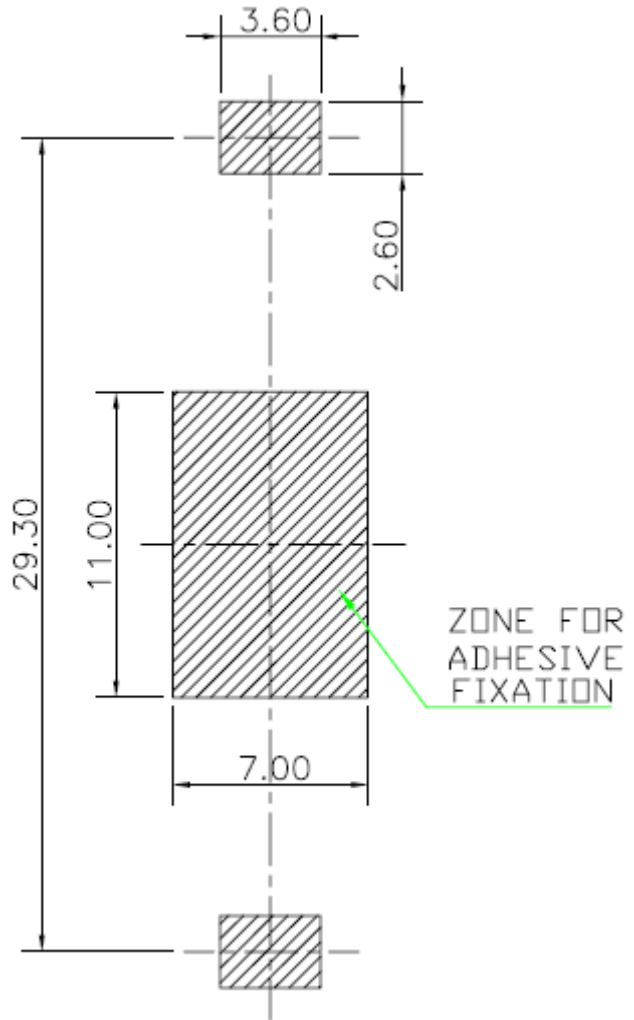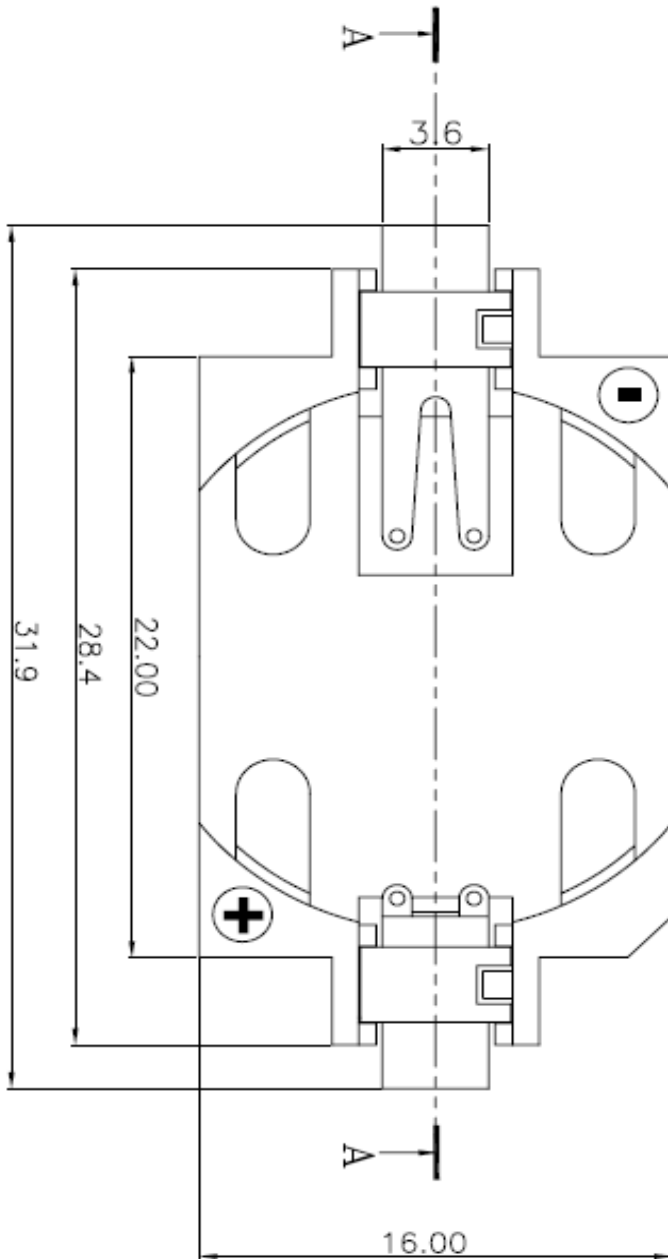


**Battery Coin Cell Holder**


Part No.: **B23003**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	03.04.2009
APPD:	Join			FINISH	Shieh	Sheet	2 from 3




**Technical Dimensions**

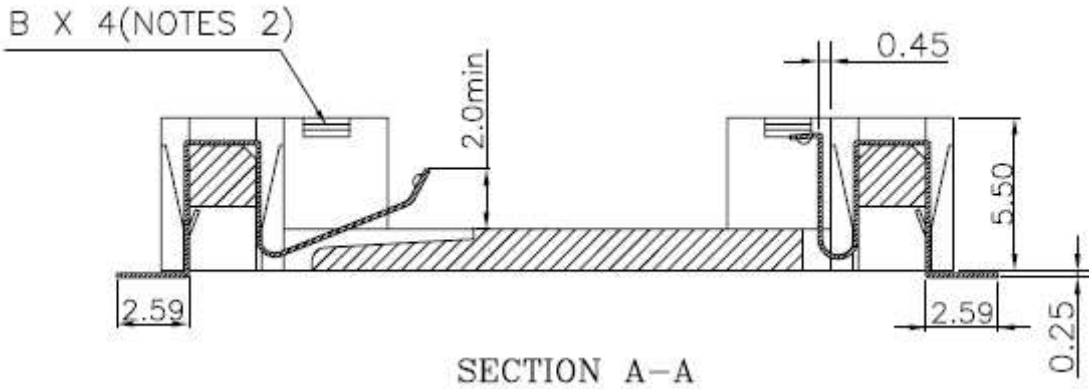

**Soldering Profile Curve**

**Classification Reflow Profile (JEDEC J-STD-020C)**

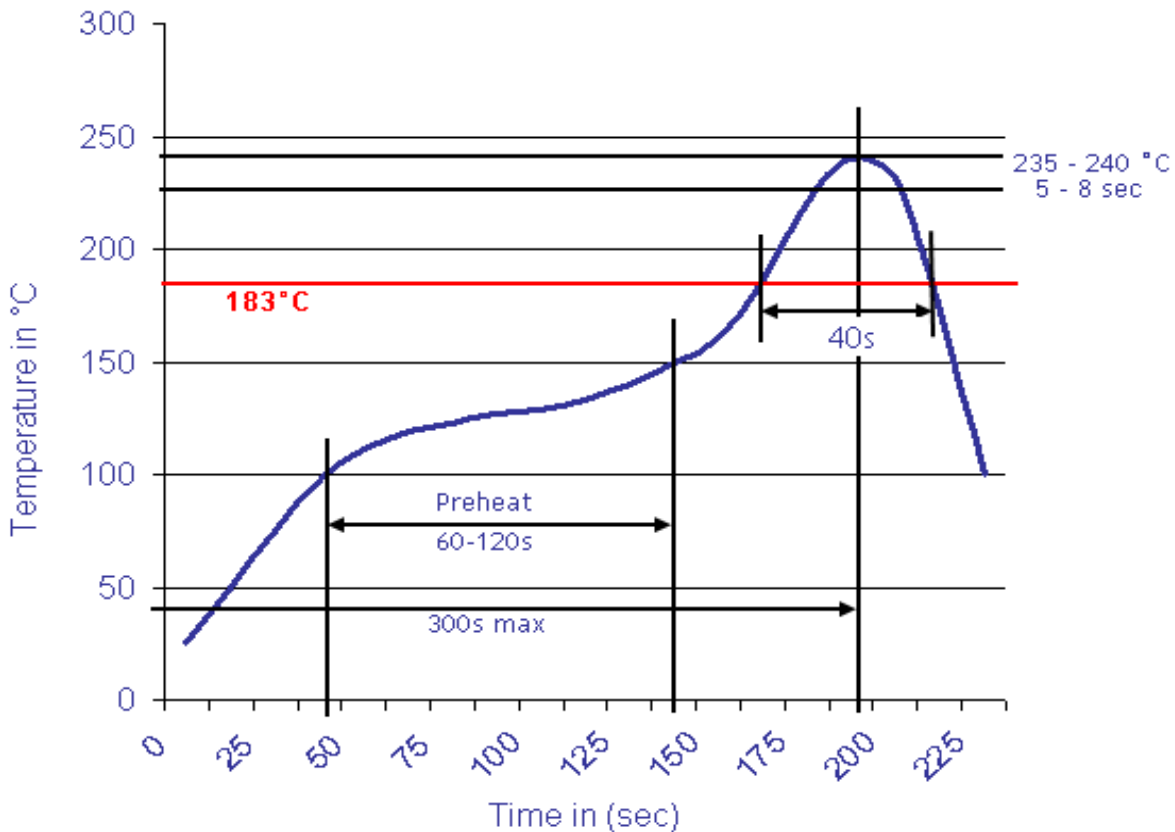

<b>Battery Coin Cell Holder</b>	
Part No.:	<b>B23003</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	03.04.2009
APPD:	Join			FINISH	Shieh	Sheet	3 from 3