



**Technical Specification**

|                       |   |
|-----------------------|---|
| Insulator Material:   |   |
| Contact Resistance:   | 30m Ohm max.                                |
| Insulator Resistance: | 1000M Ohm max.                              |
| Temperature Rating:   | .-55°C ~ 85°C                               |
| Contact Material:     | Phosphor Bronze                             |
| Contact:              | Nickel-Tin, Verzint                         |
| Dielectric Voltage:   | 750VAC                                      |
| Durability:           | 50 Cycles min.                              |
| Application for:      | Coin Type                                   |
| Battery Type:         | 377, V13AT, DR77, DR13H, SC621, V364, MC621 |

**Ordering Information**

| Serie | Contact Material | Contact Plating | ROHS | Packing |  |  |
|-------|------------------|-----------------|------|---------|--|--|
|-------|------------------|-----------------|------|---------|--|--|

|               |   |           |           |          |           |  |
|---------------|---|-----------|-----------|----------|-----------|--|
| <b>B23078</b> | - | <b>PB</b> | <b>NI</b> | <b>R</b> | <b>TR</b> |  |
|---------------|---|-----------|-----------|----------|-----------|--|



|                                  |                             |                           |                           |
|----------------------------------|-----------------------------|---------------------------|---------------------------|
| <b>PB=</b><br>Phosphor<br>Bronze | <b>TN=</b> Tin<br>plated    | <b>N=</b> Non ROHS        | <b>BU=</b> Bulk-<br>Ware  |
|                                  |                             | <b>R=</b> ROHS<br>Conform | <b>TR=</b> Tape /<br>Reel |
|                                  | <b>NI=</b> Nickel<br>plated |                           |                           |

|                                 |               |
|---------------------------------|---------------|
| <b>Battery Coin Cell Holder</b> |               |
| Part No.:                       | <b>B23078</b> |
| Customer:                       |               |


|       |       |      |       |        |       |       |            |
|-------|-------|------|-------|--------|-------|-------|------------|
| DRW:  | Jason | CHKD | Jules | MATL:  | Wu    | DATE  | 02.11.2018 |
| APPD: | Join  |      |       | FINISH | Shieh | Sheet | 1 from 3   |



Technical Dimensions (inch / mm)

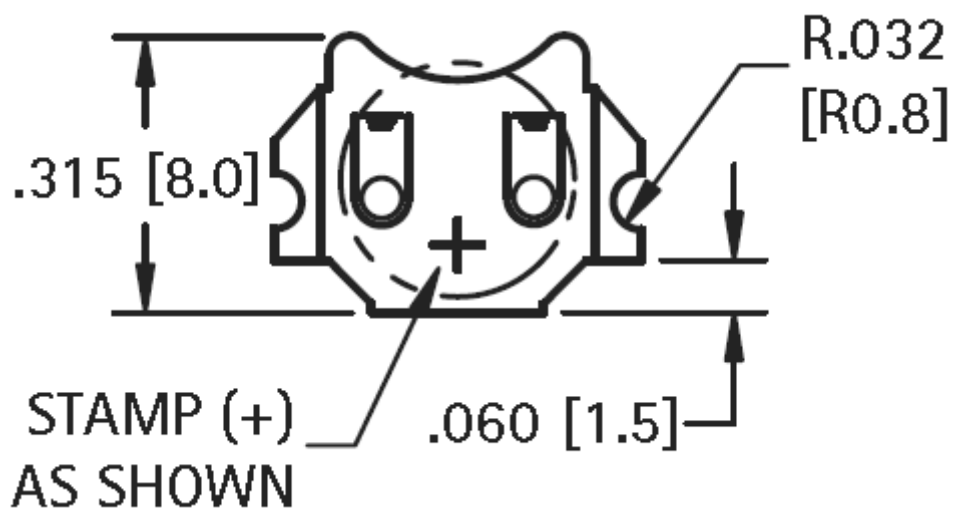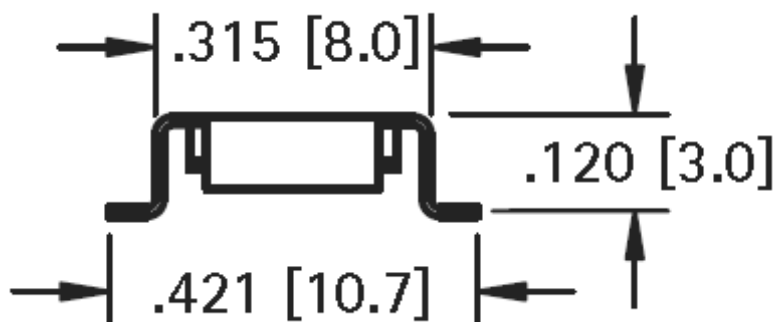

PCB Layout (inch / mm)

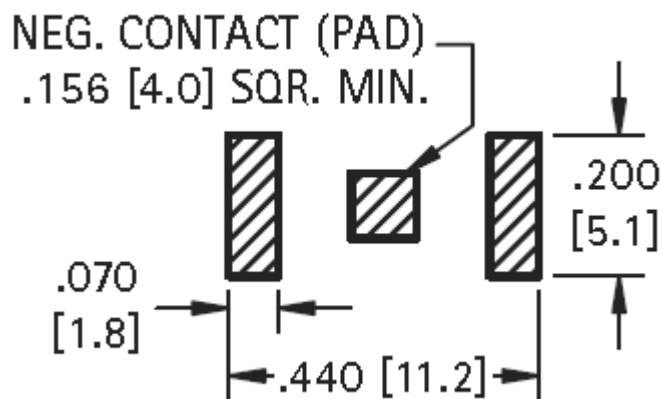


|                                 |               |
|---------------------------------|---------------|
| <b>Battery Coin Cell Holder</b> |               |
| Part No.:                       | <b>B23078</b> |
| Customer:                       |               |

|       |       |      |       |        |       |       |            |
|-------|-------|------|-------|--------|-------|-------|------------|
| DRW:  | Jason | CHKD | Jules | MATL:  | Wu    | DATE  | 02.11.2018 |
| APPD: | Join  |      |       | FINISH | Shieh | Sheet | 2 from 3   |



**Soldering Profile Curve**

**Classification Reflow Profile (JEDEC J-STD-020C)**

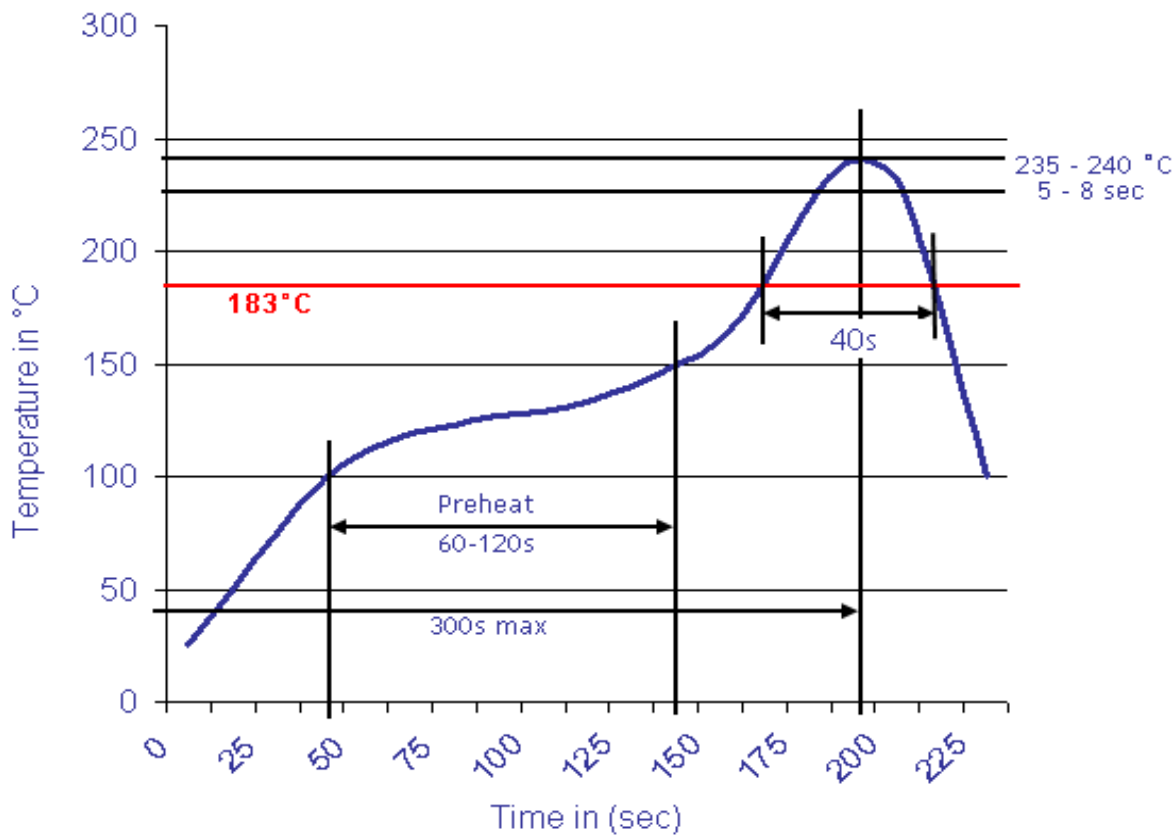

|                                 |               |
|---------------------------------|---------------|
| <b>Battery Coin Cell Holder</b> |               |
| Part No.:                       | <b>B23078</b> |
| Customer:                       |               |

|       |       |      |       |        |       |       |            |
|-------|-------|------|-------|--------|-------|-------|------------|
| DRW:  | Jason | CHKD | Jules | MATL:  | Wu    | DATE  | 02.11.2018 |
| APPD: | Join  |      |       | FINISH | Shieh | Sheet | 3 from 3   |