



Technical Specification

Material:	
Contact Resistance:	30m Ohm max.
Insulator Resistance:	1000M Ohm max.
Temperature Rating:	-.55°C ~ 85°C
Contact Material:	Phosphor Bronze
Contact:	Nickel Plate
Dielectric Voltage:	750VAC
Durability:	50 Cycles min.
Application for:	Coin Type 1 Cells of
Battery Type:	2016, 2020, 2025, 2032

Dimension of Holder

Inch					
A	B	F	H	L	W
0,831	0,416	0,200	0,156	0,782	1,210

mm					
A	B	F	H	L	W
21,1	10,6	5,1	4,0	19,9	30,7

Ordering Information

Serie	Contact Material	Contact Plating	ROHS	Packing		
-------	------------------	-----------------	------	---------	--	--

B23090	-	PB	NI	R	BU	
---------------	---	-----------	-----------	----------	-----------	--

PB= Phosphor Bronze	TN= Tin plated	N= Non ROHS	BU= Bulk- Ware
		R= ROHS Conform	TR= Tape / Reel
	NI= Nickel plated		

Battery Coin Cell Holder



Part No.: **B23090**

Customer:


DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	16.10.2019
APPD:	Join			FINISH	Shieh	Sheet	1 from 3



Technical Dimensions (inch / mm)

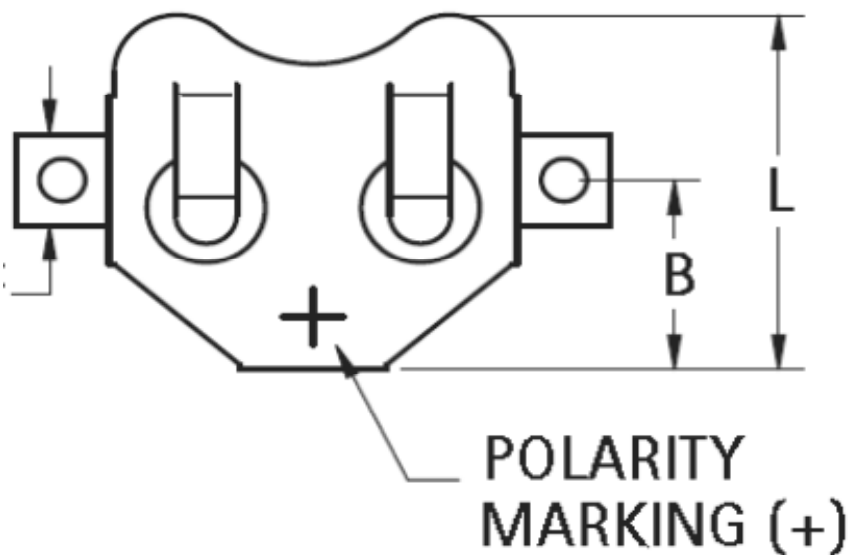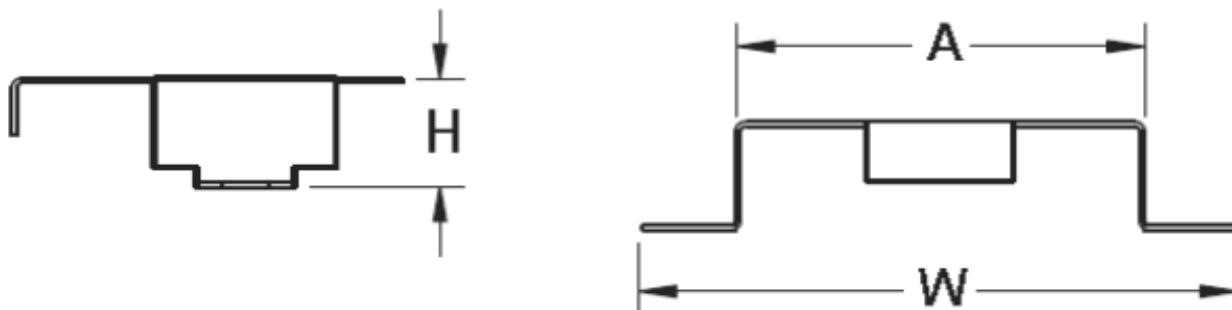

PCB Layout (inch / mm)

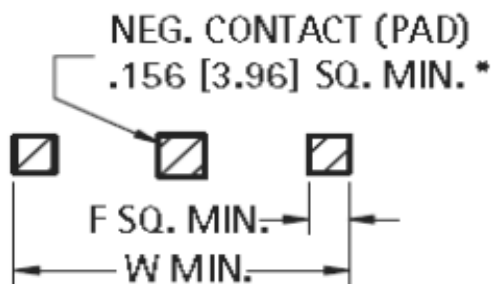


Battery Coin Cell Holder	
Part No.:	B23090
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	16.10.2019
APPD:	Join			FINISH	Shieh	Sheet	2 from 3



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

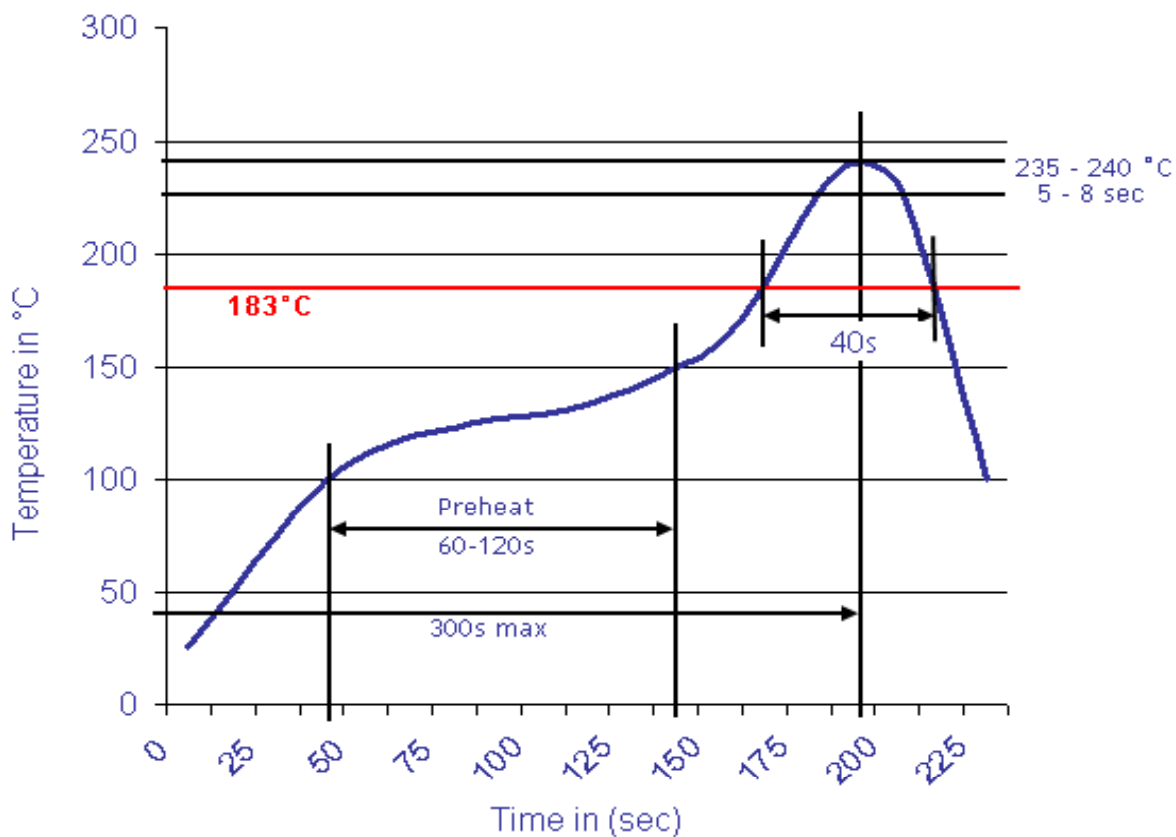

Battery Coin Cell Holder	
Part No.:	B23090
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	16.10.2019
APPD:	Join			FINISH	Shieh	Sheet	3 from 3