


EDCON-COMPONENTS



Material

Housing: LCP
Terminal: Phosphor Bronze
Latch: Brass

Camber: 0.05mm/cm max.
Warp: 0.05mm/cm max.

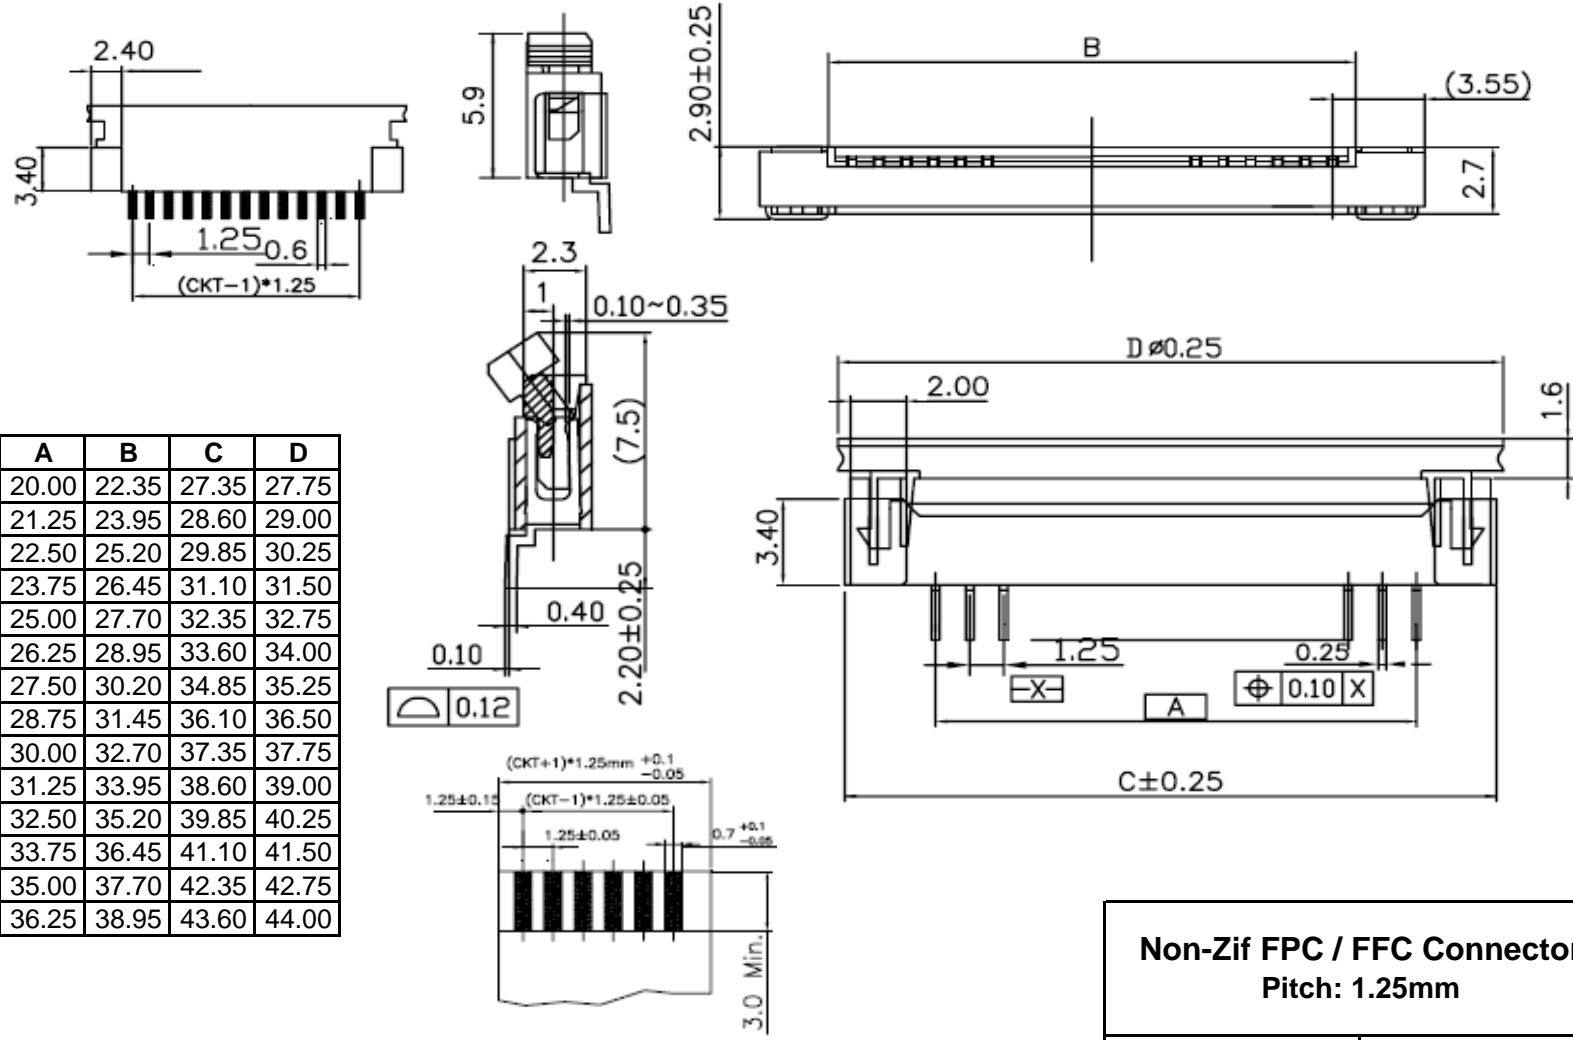

CKT	A	B	C	D	CKT	A	B	C	D
3	2.50	5.20	9.85	10.25	17	20.00	22.35	27.35	27.75
4	3.75	6.45	11.10	11.50	18	21.25	23.95	28.60	29.00
5	5.00	7.00	12.35	12.75	19	22.50	25.20	29.85	30.25
6	6.25	8.95	13.60	14.00	20	23.75	26.45	31.10	31.50
7	7.50	10.20	14.85	15.25	21	25.00	27.70	32.35	32.75
8	8.75	11.45	16.10	16.50	22	26.25	28.95	33.60	34.00
9	10.00	12.70	17.35	17.75	23	27.50	30.20	34.85	35.25
10	11.25	13.95	18.60	19.00	24	28.75	31.45	36.10	36.50
11	12.50	15.20	19.85	20.25	25	30.00	32.70	37.35	37.75
12	13.75	16.45	21.10	21.50	26	31.25	33.95	38.60	39.00
13	15.00	17.70	22.35	22.75	27	32.50	35.20	39.85	40.25
14	16.25	18.95	23.60	24.00	28	33.75	36.45	41.10	41.50
15	17.50	20.20	24.85	25.25	29	35.00	37.70	42.35	42.75
16	18.75	21.45	26.10	26.50	30	36.25	38.95	43.60	44.00

Non-Zif FPC / FFC Connector
Pitch: 1.25mm

Part No.: **T28E016**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.07.2010	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2		

EDCON-COMPONENTS




Ordering Information

Serie	-	Number of Contact	Contact Plating	Insulator Color	Packing Style					
T28E016	-	3	T	2	TU					
EDCON-Serie	-	03 = 3 Con. ... 30 = 30 Con.	T = Tin Plated G = Flash Gold	2 = Ivory (Standard) 1 = Black	TU = Tube (Standard) TR = Tape Reel (on Request)					

Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

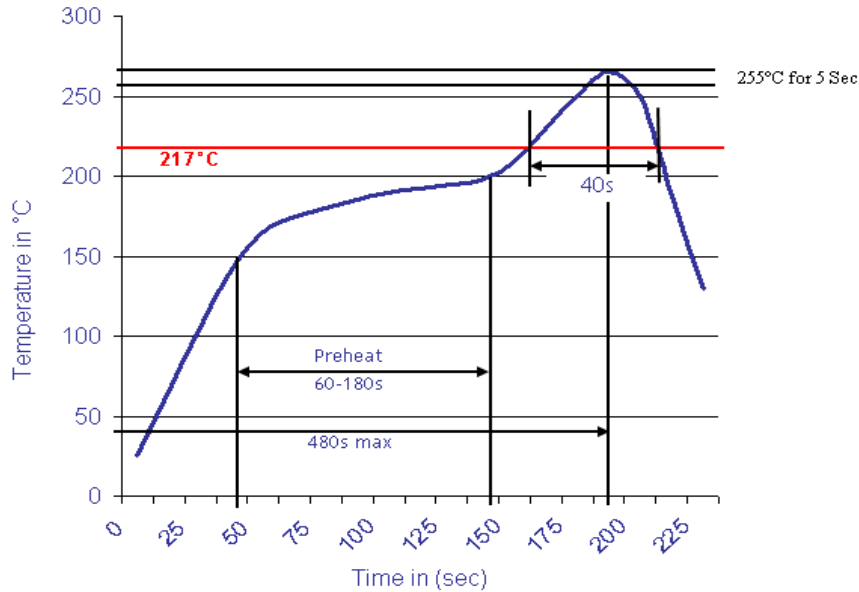

Non-Zif FPC / FFC Connector Pitch: 1.25mm	
Part No.:	T28E016

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.07.2010	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2		