



EDCON-COMPONENTS








Material

Voltage:	50V AC (rms) DC
Current:	0,5A AC (rms) DC
C. Resistance:	40m Ω max. initial
Insulation Resistance:	800M Ω min (initial)
Operating Temperature:	-25°C ~ +85°C
Dielectric Withstanding (V)	200V AC / rms
Housing:	Nylon46 UL94V-0
Terminal:	Phosphor Bronze

Dimension

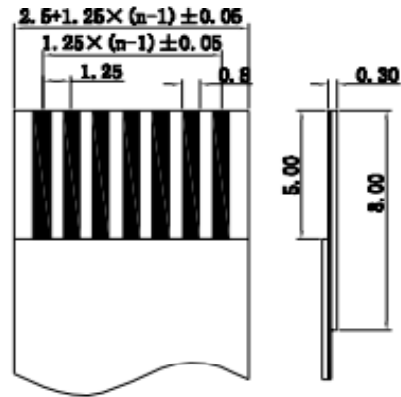

PCB Layout (mm)

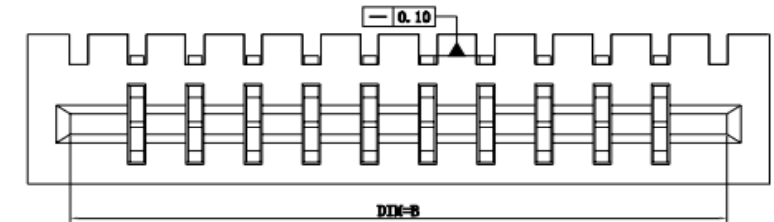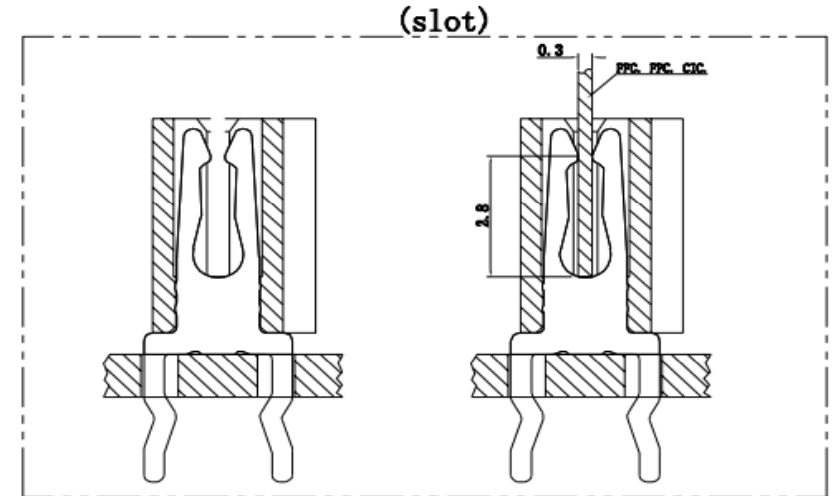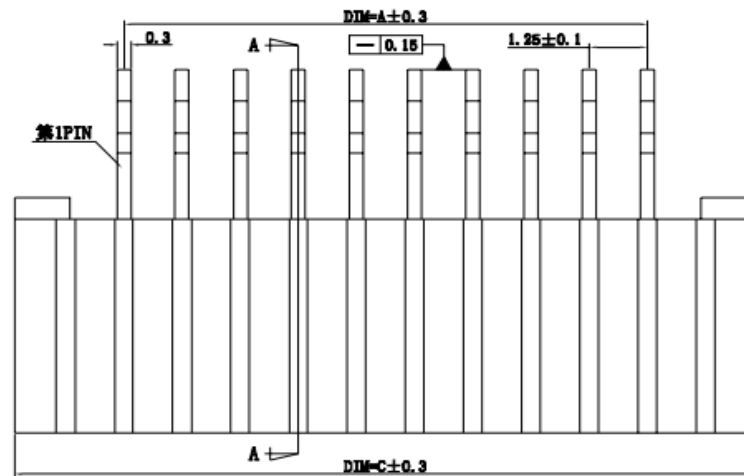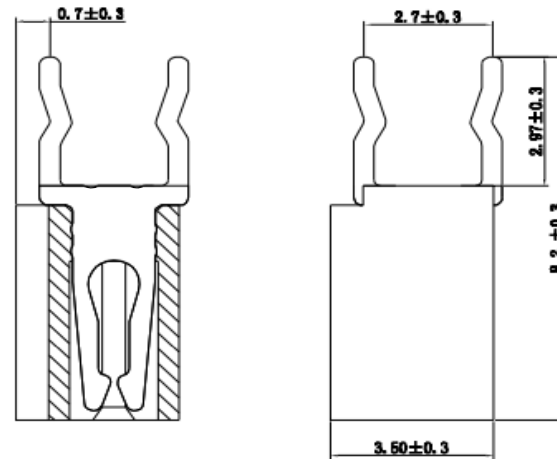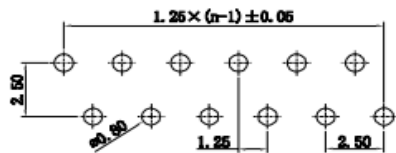

Lif FPC / FFC Connector

Pitch: 1.25mm


Part No.: T28E020

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	21.05.2025	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2		

www.edcon-components.com

email: info@edcon-components.com

Copyright by S.Tiede
EDCON-COMPONENTS




Ordering Information

Serie	-	Number of Contact	Contact Plating	Insulator Color	Packing Style					
T28E020	-	3	T	1	TU					
EDCON-Serie	-	03 = 3 Con.	T = Tin Plated (Standard)	1 = Black (Standard)	TU = Tube (Standard)					
		... 32 = 32 Con.	G = Flash Gold	2 = Ivory	TR = Tape Reel (on Request)					

Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

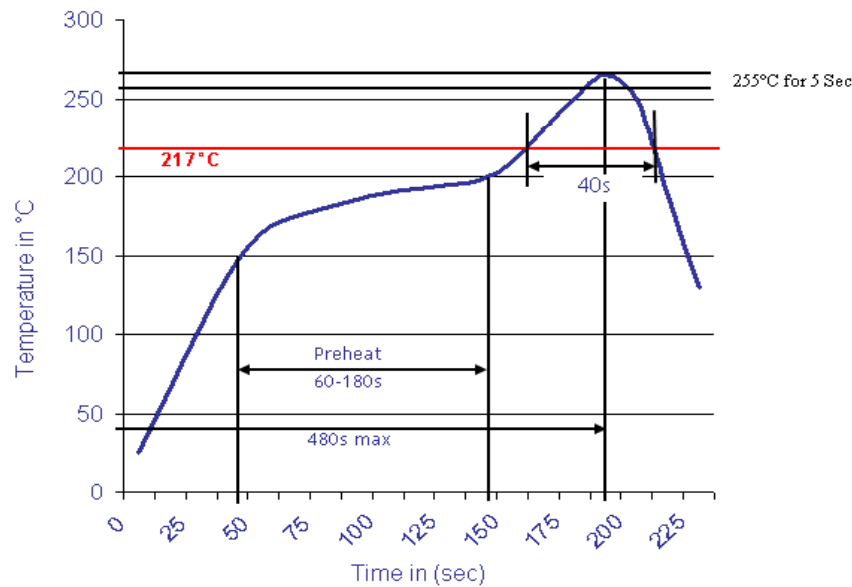

Lif FPC / FFC Connector

Pitch: 1.25mm

Part No.: **T28E020**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	21.05.2025	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2		