


EDCON-COMPONENTS



Material


Housing: Nylon UL94V-0
 Contact: Phosphor Bronze
 Latch: Phosphor Bronze

Finish

Contact: Tin
 Latch: Tin

Specification

Voltage Rating: 50 V
 Current Rating: 0.5 A
 Contact Resistance: 20 mΩ min.
 Insulation Resistance: 100 MΩ min.
 Temperature Range: -20°C to 85°C

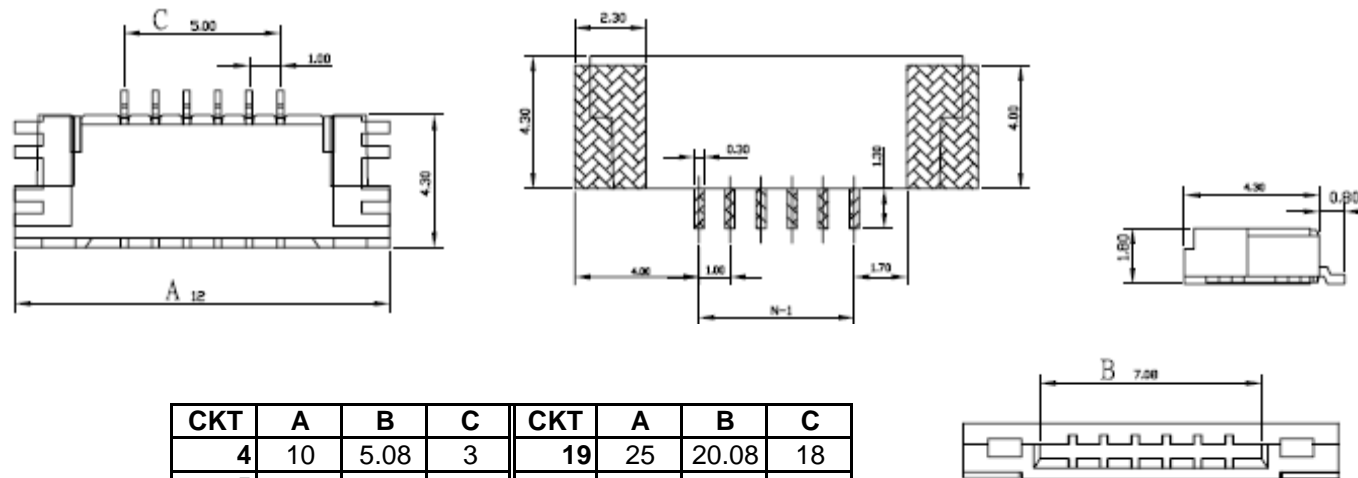


CKT	A	B	C	CKT	A	B	C
4	10	5.08	3	19	25	20.08	18
5	11	6.08	4	20	26	21.08	19
6	12	7.08	5	21	27	22.08	20
7	13	8.08	6	22	28	23.08	21
8	14	9.08	7	23	29	24.08	22
9	15	10.08	8	24	30	25.08	23
10	16	11.08	9	25	31	26.08	24
11	17	12.08	10	26	32	27.08	25
12	18	13.08	11	27	33	28.08	26
13	19	14.08	12	28	34	29.08	27
14	20	15.08	13	29	35	30.08	28
15	21	16.08	14	30	36	31.08	29
16	22	17.08	15	31	37	32.08	30
17	23	18.08	16	32	38	33.08	31
18	24	19.08	17				

Non-Zif FPC / FFC Connector
Pitch: 1.00mm

Part No.: **T28F001**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.07.2010	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3		

EDCON-COMPONENTS




Ordering Information

Serie	-	Number of Contact	Contact Plating	Insulator Color	Packing Style					
T28F001	-	03	T	2	TU					
EDCON-Serie	-	03 = 3 Con. ... 32 = 32 Con.	T = Tin Plated G = Flash Gold	2 = Ivory (Standard) 1 = Black	TU = Tube (Standard) TR = Tape Reel (on Request)					

Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

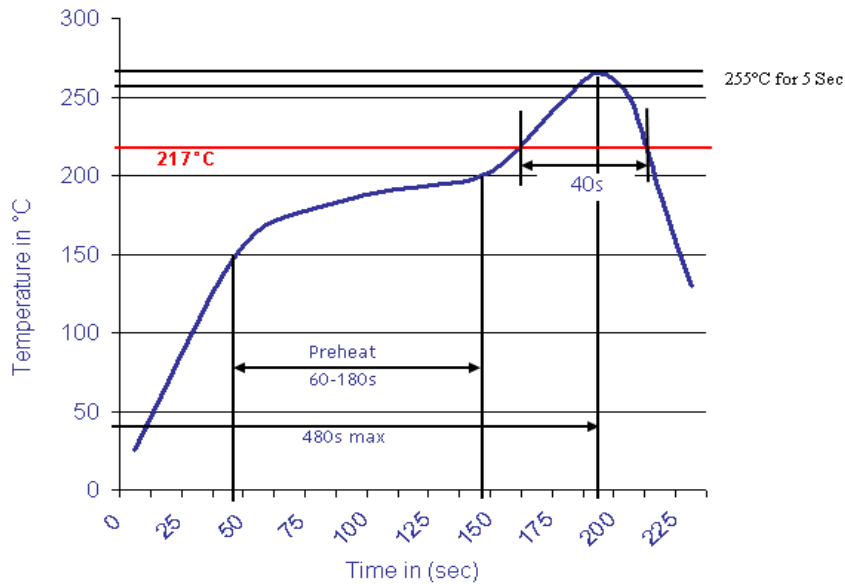

Non-Zif FPC / FFC Connector	
Pitch: 1.00mm	
Part No.:	T28F001

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.07.2010	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3		