



FFC / FPC Flat Cable Pitch 1,25mm


Conductor	Material	Tinned Coper, Bare Copper
	Size Ct x Cw	0,035x0,3 / 0,035x0,5 / 0,035x0,7 / 0,076x1,57 0,1x0,3 / 0,1x0,4 / 0,1x0,5 / 0,1x0,7 / 0,1x1,27

Insulation	Material	Flame Retardant Polyester
	Size (Thickness)	0,037mm / 0,043mm / 0,06mm / 0,092mm
	Color	White + Black

Supporting Tape	Material	Flame Retarant Polyester
	Size (Thickness)	0,16mm / 0,223mm
	Color	White + Blue

Item Quantity	Unit	Standard	Order Code
Pitch (P)	MM	1,25 ±0,03	
No. Of Conductor	CORE	4 ~120	004 ~ 120
Total Pitch (TP)	MM	0,5 (N-1) ±0,06	
Cable Width (W)	MM	0,5 (N-1) ±0,08	
Margin (M)	MM	0,5 / ±0,1	
End Thickness (T)	MM	0,3 / ±0,05	
Supporting Tape (B)	MM	4 ~ 7 ±1 / 8 ~ 20 ±2	04 ~ 20
Total Length (L)	MM	10 ~ 220 ±2 / 201 ~ 600 ±5 / >600 ±10	010 ~ 990

Film
 Conductor
 B Supporting Tape

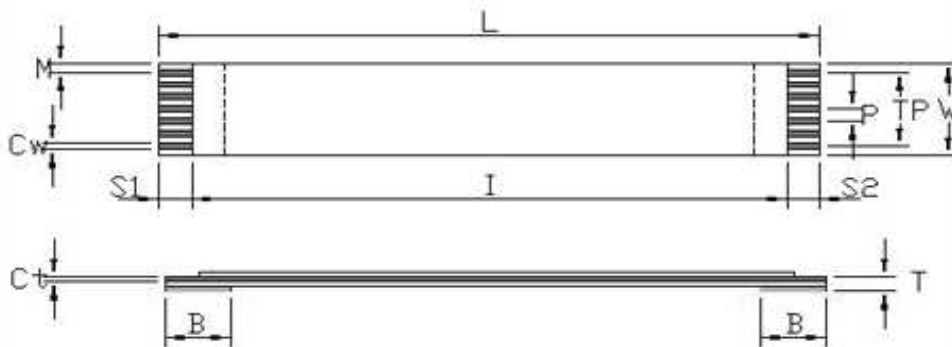

FFC/FPC Flat Cable Pitch 1,25mm	
Part No.:	T29009
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.09.2015
APPD:	Join			FINISH	Shieh	Sheet	1 from 3

Copyright by S.Tiede



Construction Type

<p><u>A-TYPE</u> Without supporting tape</p>	
<p><u>B-TYPE</u> One end supporting tape only</p>	
<p><u>C-TYPE</u> Supporting Tape on same side</p>	
<p><u>D-TYPE</u> Supporting Tape on opposite side</p>	
<p><u>E-TYPE</u> Half lift-up supporting tape</p>	
<p><u>F-TYPE</u> Semi-stripping</p>	
<p><u>G-TYPE</u> AIR-BAG CABLE</p>	

FFC/FPC Flat Cable Pitch	
1,25mm	
Part No.:	T29009
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.09.2015
APPD:	Join			FINISH	Shieh	Sheet	2 from 3



Ordering Code

Conductor Thickness Order Code Table 1	
Code	Conductor Size ct+cw
A	0,035x0,3
B	0,035x0,5
C	0,035x0,7
D	0,076x1,57
E	0,1x0,3
F	0,1x0,4
G	0,1x0,5
H	0,1x0,7
J	0,1x1,27

Ampere
0,15A
0,2A
0,3
0,8
0,5
0,8
0,8
1,0
2,0

Insulation Thickness Order Code Table 2	
Code	Thickness Size
1	0,037mm
2	0,043mm
3	0,06mm
4	0,092mm

Ordering Information

Serie	No of Conductor	Construction Type	Cable Total Length (mm)	Supporting Tape S1=(mm)	Supporting Tape S2=(mm)	Color of Cable	Conductor Table 1
T29009	xxx	A	xxx	xx	xx	W	A

006 ~ 170 Pos.	A= Type A	010= 10 ~ 990mm	04= 4 ~ 20mm	04= 4 ~ 20mm	W= White	A= A ~ J
	B= Type B				B= Black	
	C= Type C					
	D= Type D					
	E= Type E					
	F= Type F					
	G= Type G					

Insulation Table 2	ROHS	Packing
--------------------	------	---------

1	R	BU
----------	----------	-----------

1= 1 ~ 4	R= Rohs conform	BU= Polybag IV= Individual Package
	N= NON ROHS conform	

FFC/FPC Flat Cable Pitch 1,25mm	
Part No.:	T29009
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.09.2015
APPD:	Join			FINISH	Shieh	Sheet	3 from 3