



**FFC / FPC Flat Cable Pitch 2,0mm**


<b>Conductor</b>	Material	Tinned Coper, Bare Copper
	Size Ct x Cw	0,035x0,3 / 0,035x0,5 / 0,035x0,7 / 0,076x1,57 0,1x0,3 / 0,1x0,4 / 0,1x0,5 / 0,1x0,7 / 0,1x1,27

<b>Insulation</b>	Material	Flame Retardant Polyester
	Size (Thickness)	0,037mm / 0,043mm / 0,06mm / 0,092mm
	Color	White + Black

<b>Supporting Tape</b>	Material	Flame Retarant Polyester
	Size (Thickness)	0,16mm / 0,223mm
	Color	White + Blue

Item Quantity	Unit	Standard	Order Code
Pitch (P)	MM	2,0 ±0,03	
No. Of Conductor	CORE	4 ~ 120	<b>003 ~ 038</b>
Total Pitch (TP)	MM	0,5 (N-1) ±0,06	
Cable Width (W)	MM	0,5 (N-1) ±0,08	
Margin (M)	MM	0,5 / ±0,1	
End Thickness (T)	MM	0,3 / ±0,05	
Supporting Tape (B)	MM	4 ~ 7 ±1 / 8 ~ 20 ±2	<b>04 ~ 20</b>
Total Length (L)	MM	10 ~ 220 ±2 / 201 ~ 600 ±5 / >600 ±10	<b>010 ~ 990</b>

Film     
  Conductor     
  B Supporting Tape

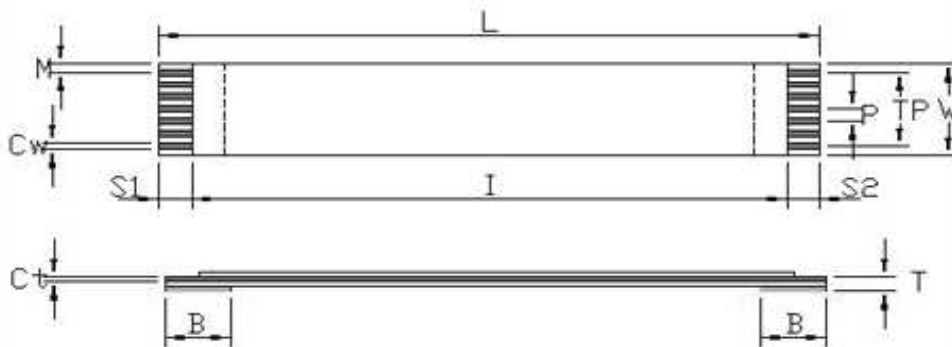


<b>FFC/FPC Flat Cable Pitch 2,0mm</b>	
Part No.:	<b>T29012</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.09.2015
APPD:	Join			FINISH	Shieh	Sheet	1 from 3



**Construction Type**

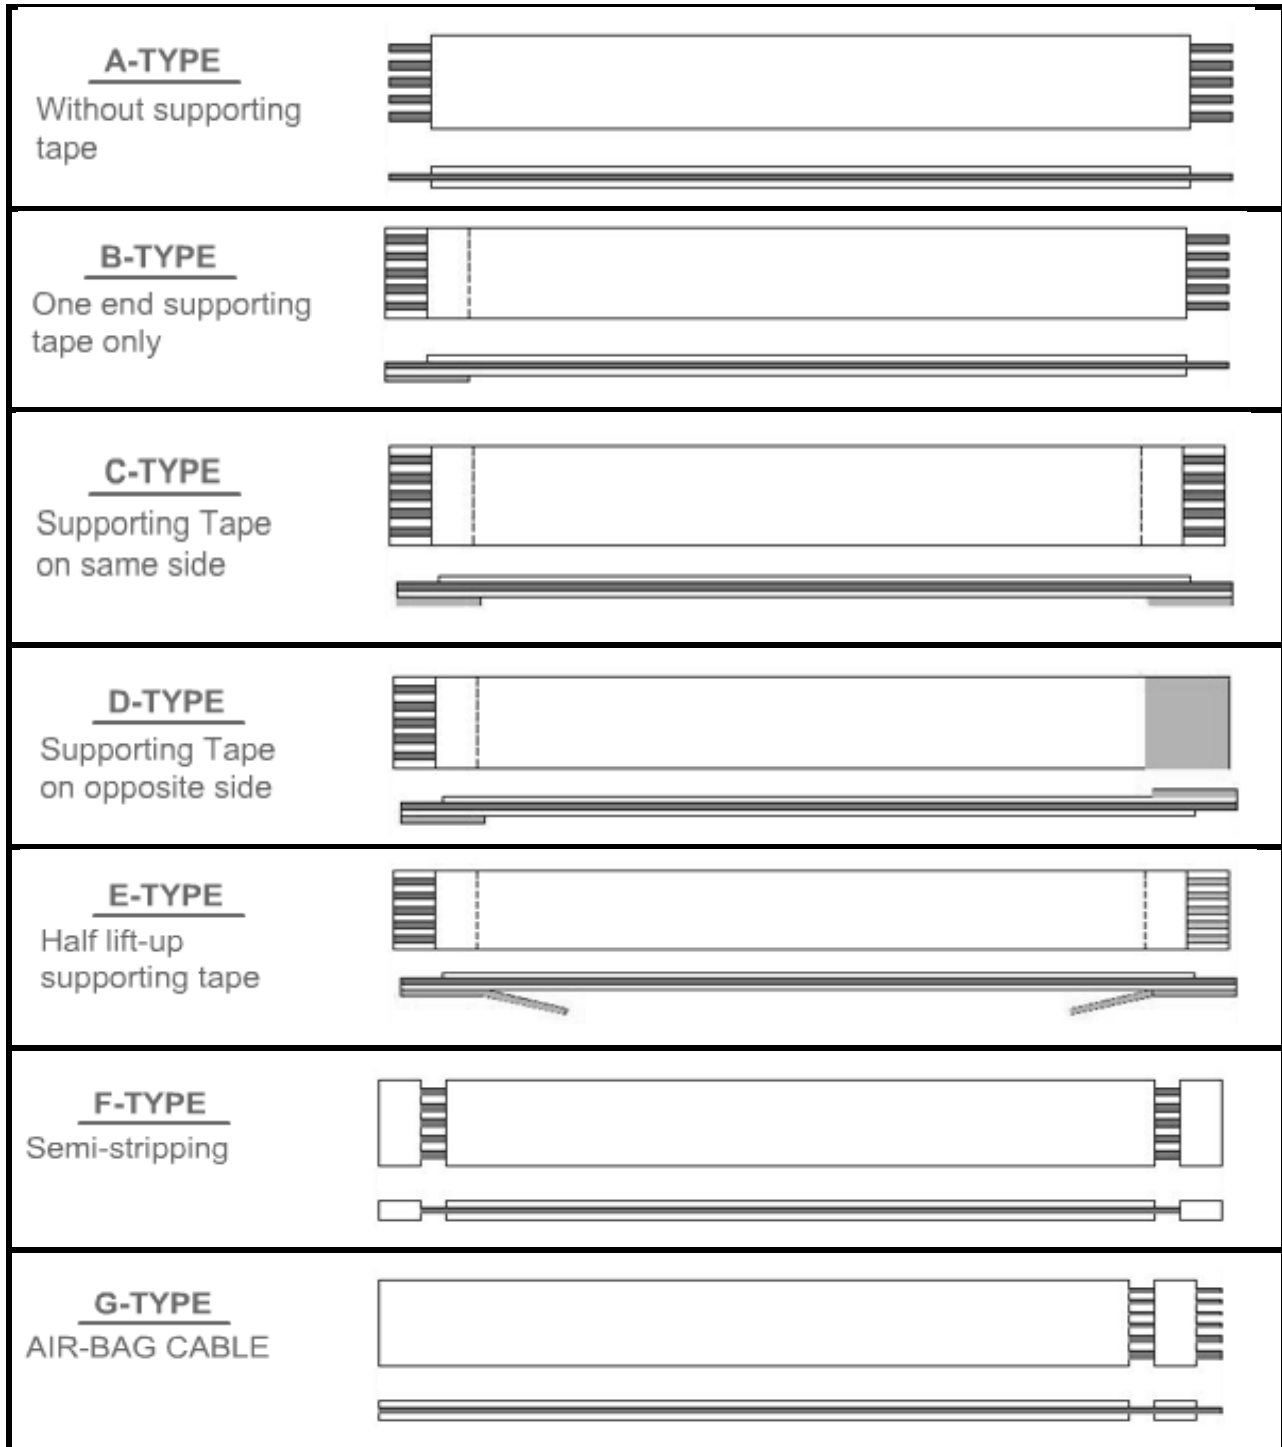

<b>FFC/FPC Flat Cable Pitch 2,0mm</b>	
Part No.:	<b>T29012</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.09.2015
APPD:	Join			FINISH	Shieh	Sheet	2 from 3



**Ordering Code**

Conductor Thickness Order Code Table 1	
Code	Conductor Size ct+cw
A	0,035x0,3
B	0,035x0,5
C	0,035x0,7
D	0,076x1,57
E	0,1x0,3
F	0,1x0,4
G	0,1x0,5
H	0,1x0,7
J	0,1x1,27

Ampere  
0,15A  
0,2A  
0,3  
0,8  
0,5  
0,8  
0,8  
1,0  
2,0

Insulation Thickness Order Code Table 2	
Code	Thickness Size
1	0,037mm
2	0,043mm
3	0,06mm
4	0,092mm

**Ordering Information**

Serie	No of Conductor	Construction Type	Cable Total Length (mm)	Supporting Tape S1=(mm)	Supporting Tape S2=(mm)	Color of Cable	Conductor Table 1
<b>T29012</b>	<b>xxx</b>	<b>A</b>	<b>xxx</b>	<b>xx</b>	<b>xx</b>	<b>W</b>	<b>A</b>

<b>006 ~ 170</b> Pos.	<b>A= Type A</b>	<b>010= 10 ~ 990mm</b>	<b>04= 4 ~ 20mm</b>	<b>04= 4 ~ 20mm</b>	<b>W= White</b>	<b>A= A ~ J</b>
	<b>B= Type B</b>				<b>B= Black</b>	
	<b>C= Type C</b>					
	<b>D= Type D</b>					
	<b>E= Type E</b>					
	<b>F= Type F</b>					
	<b>G= Type G</b>					

Insulation Table 2	ROHS	Packing
<b>1</b>	<b>R</b>	<b>BU</b>
<b>1= 1 ~ 4</b>	<b>R= Rohs conform</b>	<b>BU= Polybag</b>
	<b>N= NON ROHS conform</b>	

<b>FFC/FPC Flat Cable Pitch 2,0mm</b>	
Part No.:	<b>T29012</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.09.2015
APPD:	Join			FINISH	Shieh	Sheet	3 from 3