



**Technical Specification**

Contact Resistance: 30m Ohm max.  
 Insulator Resistance: 5000 M Ohm max.  
 Temperature Rating: -55°C ~ +105°C  
 Contact Material: Phosphor Bronze  
 Contact: Nickel Plated  
 Durability: 50 Cycles min.  
 Application for: Coin Type  
 Battery Dimension: D= 24,0mm / T=3,0mm

**Ordering Information**


Serie	Contact Material	Contact Plating	ROHS	Packing		
-------	------------------	-----------------	------	---------	--	--

<b>B23040</b>	<b>PB</b>	<b>NI</b>	<b>R</b>	<b>TY</b>		
---------------	-----------	-----------	----------	-----------	--	--






<b>PB=</b> Phosphor Bronze	<b>NI=</b> Nickel plated	<b>N=</b> Non ROHS	<b>TY=</b> Tray
		<b>R=</b> ROHS Conform	<b>TR=</b> Tape Reel

<b>Battery Coin Cell Holder</b>	
Part No.:	<b>B23040</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	12.03.2011
APPD:	Join			FINISH	Shieh	Sheet	1 from 3



**Technical Dimensions**

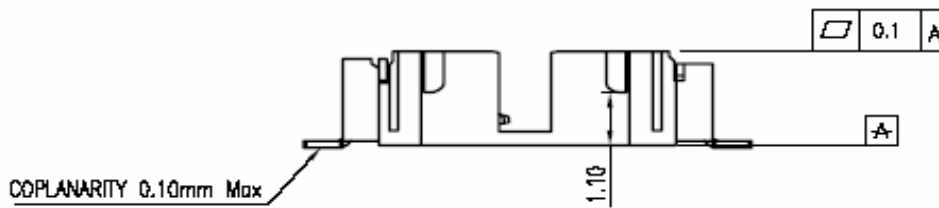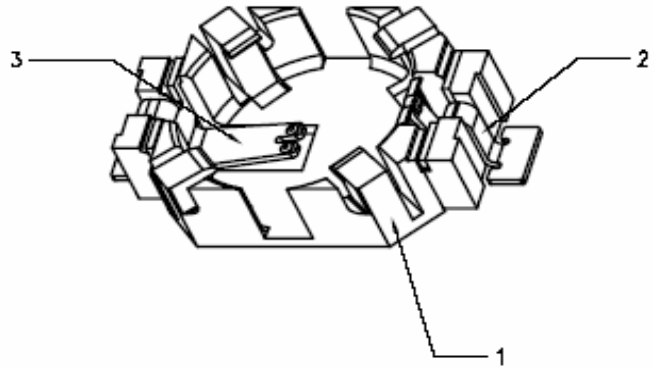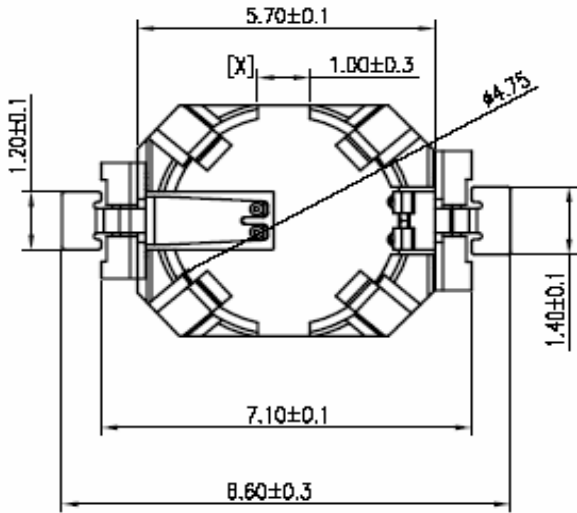


<b>Battery Coin Cell Holder</b>	
Part No.:	<b>B23040</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	12.03.2011
APPD:	Join			FINISH	Shieh	Sheet	2 from 3



**Soldering Profile Curve**

**Classification Reflow Profile (JEDEC J-STD-020C)**

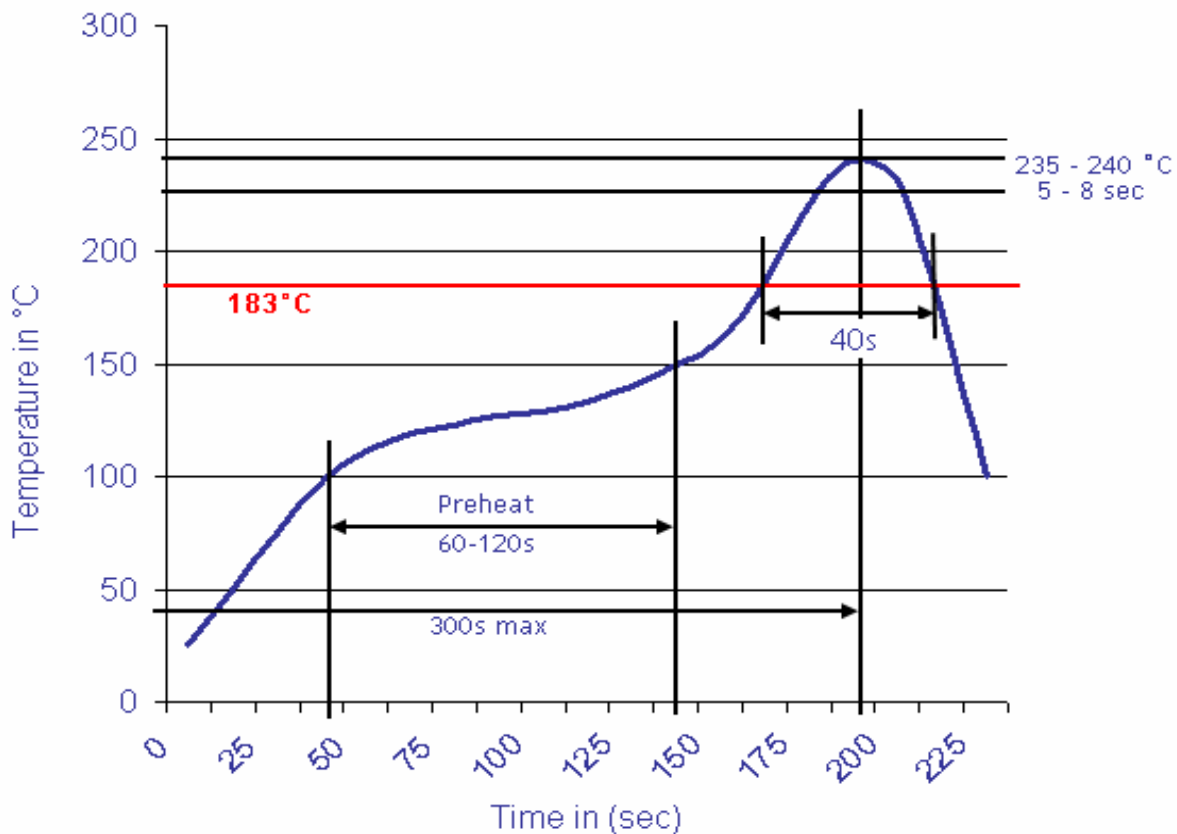

**Battery Coin Cell Holder**

Part No.: **B23040**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	12.03.2011
APPD:	Join			FINISH	Shieh	Sheet	3 from 3