




Normal Thread length

Material

Material:	Nut, Locknut and Body are made from Nickel-plated Brass. Seal and O-ring from NBR or EPDM.
Protection level:	Up to IP68 (used together with O-ring within its cable range).
Installation:	Cables can be directly inserted into the hole of the same size thread and then fix it with the Locknut.
Ambient Temperature:	Static: -40°C to 100°C, short-term: 120°C. Dynamic: -20°C to 80°C, short-term: 100°C Used for fixing cables and provide the effective protection against dust, water, oil penetrating the electrical distribution box, electromechanical control panel and other instruments.
Application:	Innovative design for the Seal and Clamp, wide clamping range, strong resistance against the tensile strength and thus it can protect cables effectively.

Technical Drawing

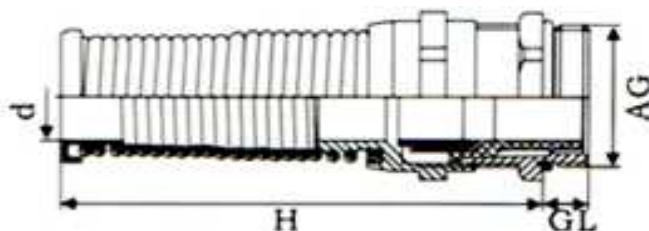

Metal Strain Relief Cable Gland M-Thread

Part No.: **231058**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2016
APPD:	Join			FINISH	Shieh	Sheet	1 from 2

Copyright by S.Tiede

[illegible]

Serie	Size	No function	ROHS	Packing		
231058	M18A	N	R	BU		

Look dimension table	N =No function	R = ROHS Conform	BU = Bulk- Ware into Polybag
		N = NON ROHS	

Part No.:	231058
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2016
APPD:	Join			FINISH	Shieh	Sheet	2 from 2