



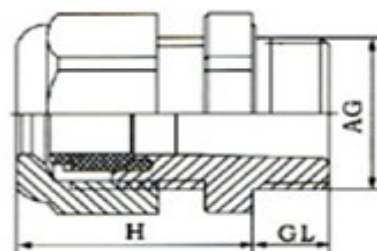

Material

Material:	Nut, Locknut and Body are made from UL-certified PA66, 94V-2. Seal and Washer from NBR or EPDM.
Standard Colors:	Grey RAL7035, black RAL9005, other colors are available on request.
Protection Degree:	Up to IP68 (used together with Washer within its cable range).
Operation Temperature:	Static: -40°C to 100°C short-term: 120°C. Dynamic: -20°C to 80°C, short-term: 100°C.
Application:	Installation: Cables can be directly inserted into the hole of the same size thread and then fix it with the Locknut. Used for fixing cables and provide the effective protection against dust, water, oil penetrating the electrical distribution box, electromechanical control panel and other instruments. Innovative design for the Seal and Clamp, wide clamping range, strong resistance against the tensile strength and thus it can protect cables effectively.

Technical Drawing

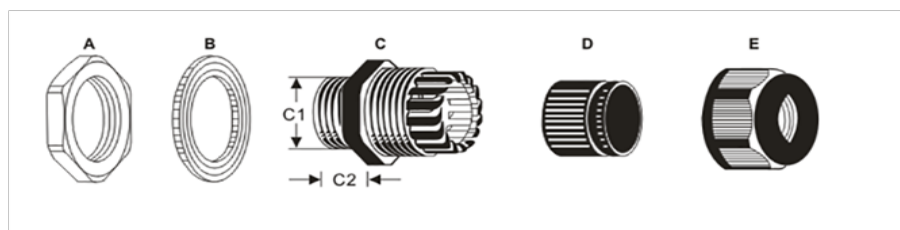

Dimension Table

Sizes (MXXx1,5)	Cable Range		AG (mm)	Panel mounting Hole (mm)	GL (mm)	H (mm)	Spanner (mm)
	Min. (mm)	Max. (mm)					
M12A	3	6,5	12	12,2	8	22	16
M12B	2	5	12	12,2	8	22	16
M14A	4	8	14	14,2	8	26	19
M14B	2	6	14	14,2	8	26	19
M16A	4	8	16	16,2	8	26	19
M16B	2	6	16	16,2	8	26	19
M16C	5	10	16	16,2	8	27	22
M16D	3	7	16	16,2	8	27	22
M18A	5	10	18	18,2	8	27	22
M18B	3	7	18	18,2	8	27	22

PA66 Cable Gland UV-Resistant M-Type

Part No.: **231063**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	14.10.2025
APPD:	Join			FINISH	Shieh	Sheet	1 from 2

Copyright by S.Tiede



Dimension Table

Sizes (MXXx1,5)	Cable Range		AG (mm)	Panel mounting Hole (mm)	GL (mm)	H (mm)	Spanner (mm)
	Min. (mm)	Max. (mm)					
M20A	6	12	20	20,2	9	28	24
M20B	5	9	20	20,2	9	28	24
M20C	10	14	20	20,2	10	30	27
M20D	7	12	20	20,2	10	30	27
M22A	10	14	22	22,2	10	30	27
M22B	7	12	22	22,2	10	30	27
M24A	12	15	24	24,2	10	30	27
M24B	10	12	24	24,2	10	30	27
M25A	13	18	25	25,2	10	35	33
M25B	9	16	25	25,2	10	35	33
M27A	13	18	27	27,2	10	35	33
M27B	9	16	27	27,2	10	35	33
M30A	16	21	30	30,2	11	34	35/36
M30B	13	18	30	30,2	11	34	35/36
M32A	16	21	32	32,2	11	34	36/37
M32B	18	25	32	32,2	12	40	41/42
M36A	18	25	36	36,2	12	40	41
M36B	13	20	36	36,2	12	40	41
M40A	22	32	40	40,2	14	48	52/53
M40B	20	26	40	40,2	14	48	52/53
M50A	32	38	50	50,2	14	49	60/61
M50B	25	31	50	50,2	14	49	60/61
M63A	37	44	63	63,2	14	50	67

Ordering Information

Serie	Size	Color	ROHS	Packing		
231063	M12A	7035	R	B1		

Look dimension table	7001 =Silver Gray	R = ROHS Conform 0 = NON ROHS	B1 = 100PCS in one Poly Bag
	7035 = Light Gray		
	9005 = Black		
	5015 = Blue		
	9003 = White		
	3020 = Red		



PA66 Cable Gland UV-Resistant M-Type

Part No.: **231063**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	14.10.2025
APPD:	Join			FINISH	Shieh	Sheet	2 from 2

Copyright by S.Tiede