




Material

Material:	Nut, Locknut and Body are made from UL-certified nylon 66, 94V-2. Seal and Washer from NBR or EPDM.
Standard Colors:	Grey RAL7035, black RAL9005, other colors are available on request.
Protection Degree:	Up to IP55 (used together with Washer within its cable range).
Operation Temperature:	Static: -40°C to 100°C short-term: 120°C. Dynamic: -20°C to 80°C, short-term: 100°C. Installation: Cables can be directly inserted into the hole of the same size thread and then fix it with the Locknut.
Application:	Used for fixing cables and provide the effective protection against dust, water, acid, alcohol, oil penetrating the electrical distribution box, electromechanical control panel and other instruments.

Technical Drawing

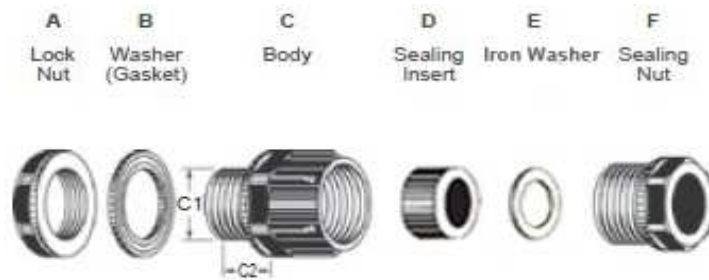

Flat Head Nylon Cable Gland PG-Thread

Part No.: **231066**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2016
APPD:	Join			FINISH	Shieh	Sheet	1 from 2

Copyright by S.Tiede



Dimension Table

Sizes	Cable Range		AG (mm)	GL (mm)	H (mm)	Spanner (mm)	
	Min. (mm)	Max. (mm)					
PG9	4	8	15,2	8	31	19	
PG11	5	10	18,6	8	35	22	
PG13,5	6	12	20,4	9	37	24	
PG16	10	14	22,5	10	38	27	
PG21	13	18	28,3	10	42	33	
PG29	18	25	37	12	50	41/42	
PG36	22	32	47	14	60	52/53	
PG42	32	38	54	14	61	60/61	
PG48	37	44	59,3	14	62	64/65	

Ordering Information

Serie	Size	Color	ROHS	Packing		
231066	M12	7035	R	BU		

Look dimension table	7001 =Silver Gray	R = ROHS Conform N = NON ROHS	BU = Bulk-Ware into Polybag
	7035 = Light Gray		
	9005 = Black		
	5015 = Blue		
	9003 = White		
	3020 = Red		



Flat Head Nylon Cable Gland PG-Thread

Part No.: **231066**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2016
APPD:	Join			FINISH	Shieh	Sheet	2 from 2

Copyright by S.Tiede