




Material

Material:	Nut, Locknut and Body are made from UL-certified nylon 66, 94V-2. Seal and Washer from NBR or EPDM.
Standard Colors:	Grey RAL7035, black RAL9005, other colors are available on request.
Protection Degree:	Up to IP55 (used together with Washer within its cable range).
Operation Temperature:	Static: -40°C to 100°C short-term: 120°C. Dynamic:-20°C to 80°C, short-term:100°C. Installation: Cables can be directly inserted into the hole of the same size thread and then fix it with the Locknut.
Application:	Used for fixing cables and provide the effective protection against dust, water, acid, alcohol,oil penetrating the electrical distribution box, electromechanical control panel and other instruments.

Technical Drawing

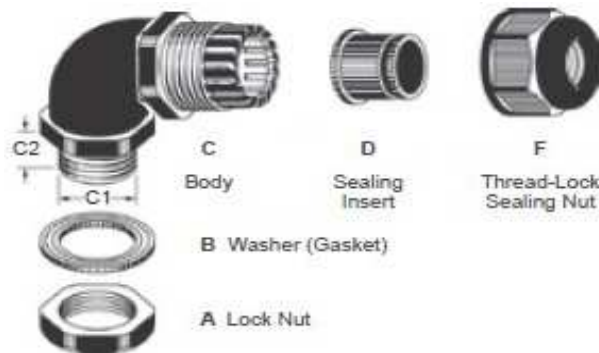

Right Angle Nylon Cable Gland M-Thread

Part No.: **231069**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2016
APPD:	Join			FINISH	Shieh	Sheet	1 from 2

Copyright by S.Tiede



Dimension Table

Sizes (MXXx1,5)	Cable Range		C1 (mm)	C1 (mm)	H (mm)	Spanner (mm)	
	Min. (mm)	Max. (mm)					
M16A	4	8	16	8	37	19	
M16B	2	6	16	8	37	19	
M18A	5	10	18	8	39	22	
M18B	3	7	18	8	39	22	
M20A	6	12	20	9	43	24	
M20B	5	9	20	9	43	24	
M22A	10	14	22	10	48	27	
M22B	7	12	22	10	48	27	
M25A	13	18	25	11	56	33	
M25B	9	16	25	11	56	33	
M32A	18	25	32	11	68	41/42	
M32B	13	20	32	11	68	41/42	

Ordering Information

Serie	Size	Color	ROHS	Packing		
231069	M16A	7035	R	BU		

Look dimension table	7001 =Silver Gray	R = ROHS Conform N = NON ROHS	BU = Bulk-Ware into Polybag
	7035 = Light Gray		
	9005 = Black		
	5015 = Blue		
	9003 = White		
	3020 = Red		



Right Angle Nylon Cable Gland M-Thread

Part No.:	231069
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2016
APPD:	Join			FINISH	Shieh	Sheet	2 from 2

Copyright by S.Tiede