




Material

Material:	UL-certified nylon 66, 94V-2
Temperature Range:	min -40°C ~ max. +100°C
Standard Color	Gray RAL7035, Black RAL9005 other colors are available on request
Features:	Used for converting holes which fir PG / Metric threads to a smaller female thread of the same thread type

Technical Drawing

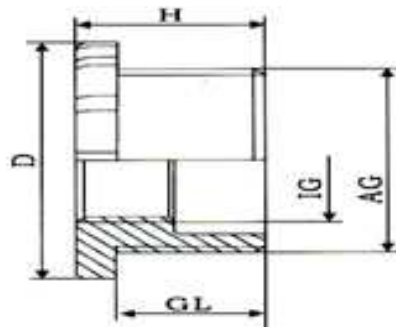

Nylon Threaded Reducer M Type	
Part No.:	231078
Customer:	
DATE	28.07.2016
Sheet	1 from 2

Copyright by S.Tiede



Dimension Table

Sizes MXXx1,5	AG (mm)	IG (mm)	IG (mm)	GL (mm)	H (mm)	D (mm)	
M20A	20	M12x1,5	12	8	12	27	
M20B	20	M16x1,5	16	8	12	27	
M25A	25	M16x1,5	16	10	13	29	
M25B	25	M20x1,5	20	10	13	29	
M32A	32	M20x1,5	20	11	13,5	36	
M32B	32	M25x1,5	25	11	13,5	36	
M40A	40	M25x1,5	25	11	13,5	46	
M40B	40	M32x1,5	32	11	13,5	46	
M50A	50	M32x1,5	32	11	15	58	
M50B	50	M40x1,5	40	11	15	58	

Ordering Information

Serie	Size	Color	ROHS	Packing		
231078	M12	7035	R	BU		

Look dimension table	7001 =Silver Gray	R = ROHS Conform N = NON ROHS	BU = Bulk-Ware into Polybag
	7035 = Light Gray		
	9005 = Black		
	5015 = Blue		
	9003 = White		
	3020 = Red		



Nylon Threaded Reducer M- Type

Part No.:	231078
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2016
APPD:	Join			FINISH	Shieh	Sheet	2 from 2

Copyright by S.Tiede