




Long Thread length

Material

Material:	Nut, Locknut and Body are made from Nickel-plated Brass. Seal and O-ring from NBR or EPDM.
Protection level:	Up to IP68 (used together with O-ring within its cable range).
Installation:	Cables can be directly inserted into the hole of the same size thread and then fix it with the Locknut.
Ambient Temperature:	Static: -40°C to 100°C, short-term: 120°C. Dynamic: -20°C to 80°C, short-term: 100°C Used for fixing cables and provide the effective protection against dust, water, oil penetrating the electrical distribution box, electromechanical control panel and other instruments.
Application:	Innovative design for the Seal and Clamp, wide clamping range, strong resistance against the tensile strength and thus it can protect cables effectively.

Technical Drawing

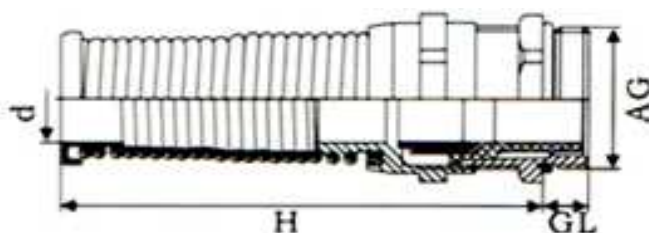

Metal Strain Relief Cable Gland PG-Thread

Part No.: **231084**

Customer:

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2018
APPD:	Join			FINISH	Shieh	Sheet	1 from 2



Dimension Table

[illegible]

Ordering Information

Serie	Size	No function	ROHS	Packing		
-------	------	-------------	------	---------	--	--

231084	-	PG7A	N	R	BU		
--------	---	------	---	---	----	--	--

Look dimension table	N =No function	R = ROHS Conform	BU = Bulk-Ware into Polybag
		N = NON ROHS	

Metal Strain Relief Cable Gland PG-Thread	
Part No.:	231084
Customer:	
DATE	28.07.2018
Sheet	2 from 2

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	28.07.2018
APPD:	Join			FINISH	Shieh	Sheet	2 from 2