



EDCON-COMPONENTS

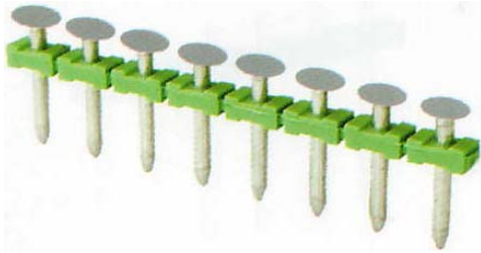

Drawing

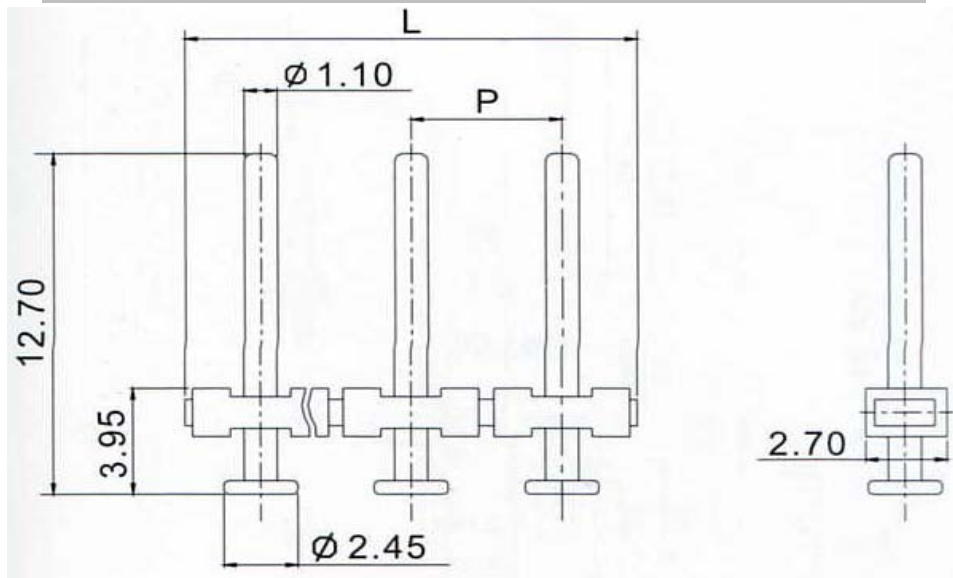

Specification

Electrical

Rated voltage	300V
Rated current	10A
Breakdown voltage	AC 2000V

Mechanical

Ambient temperature	-40°C ~ +105°C
Soldering temperature	260°C

Dimensions

Pitch	5.00mm
Poles	2P - 30P

Material

Housing	PA (UL94V-0)
Pin header	Brass, Tin plated

Pole	Length	Pole	Length	Pole	Length	Pole	Length
02	10.0	10	50.0	18	90.0	26	130.0
03	15.0	11	55.0	19	95.0	27	135.0
04	20.0	12	60.0	20	100.0	28	140.0
05	25.0	13	65.0	21	105.0	29	145.0
06	30.0	14	70.0	22	110.0	30	150.0
07	35.0	15	75.0	23	115.0		
08	40.0	16	80.0	24	120.0		
09	45.0	17	85.0	25	125.0		



Pluggable Terminal Block /
Pitch 5.00mm


Part No.: A14L001

DRW:	Justin	CHKD:	Frank	MATL:	Jordan	TOLERANCE:	Lord	Date:	10.2.2009
APPD:	Pete			FINISH:	Mike			Sheet No.:	1 from 3
									Customer:

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS

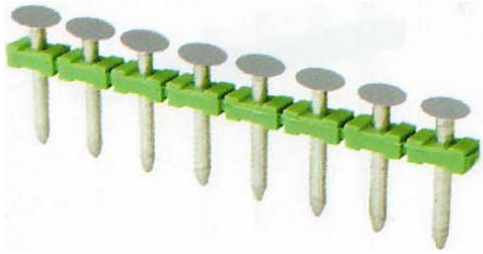


Ordering Informations

Serie	-	No. of Pole	Body-Color	-	Customer Request
A14L001	-	XX	XX	-	X
		XX = total	LG - light grey		
		02P	BK - black		
		...	BL - blue		
		30P	GR - greedy		
			DG - dark grey		




Pluggable Terminal Block / Pitch 5.00mm	
Part No.:	A14L001
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.2.2009
APPD:	Pete			FINISH	Mike			Sheet No.	2 from 3

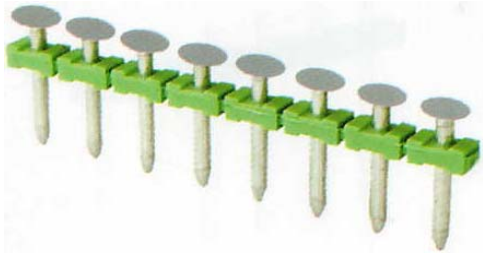

Soldering - Profil

Classification Reflow Profile (JEDEC J-STD-020C)

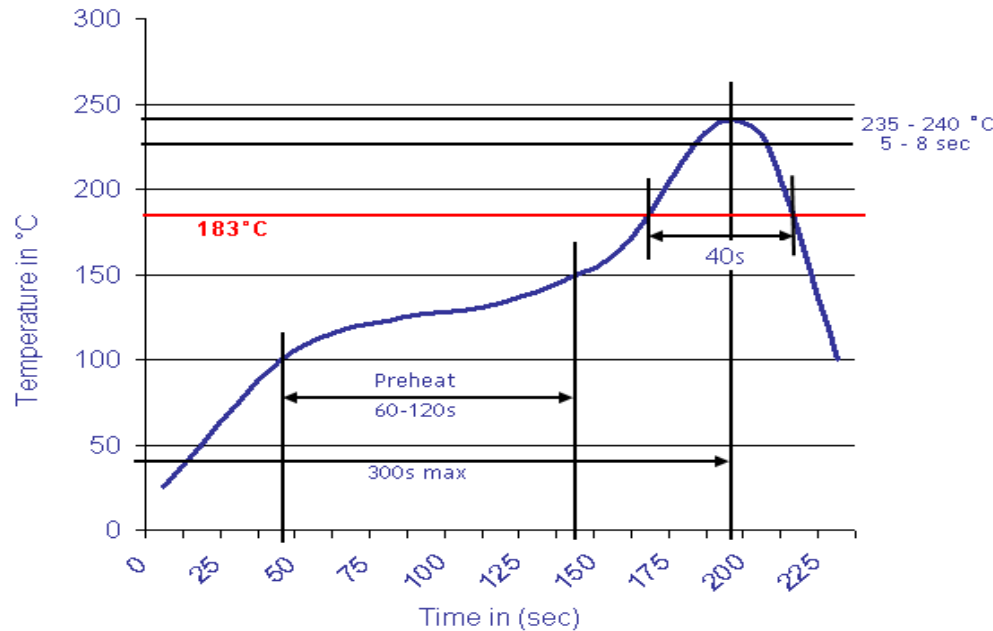

Pluggable Terminal Block / Pitch 5.00mm	
Part No.:	A14L001
Customer:	

DRW:	Justin	CHKD	Frank	MATL:	Jordan	TOLERANCE	Lord	Date	10.2.2009
APPD:	Pete			FINISH	Mike			Sheet No.	3 from 3