


EDCON-COMPONENTS




SPECIFICATION:

Current Rating: 50mA / 12VDC
 Insulator Resistance: 100M ohm bei 100VDC
 Dielectric Withstanding: 250VAC for 1 min.
 Operating Temperature: . -30°C ~ +85°C
 Contact Resistance: 500m Ohm max.
 Travel: 0,20 / +-0,1mm

Drawing

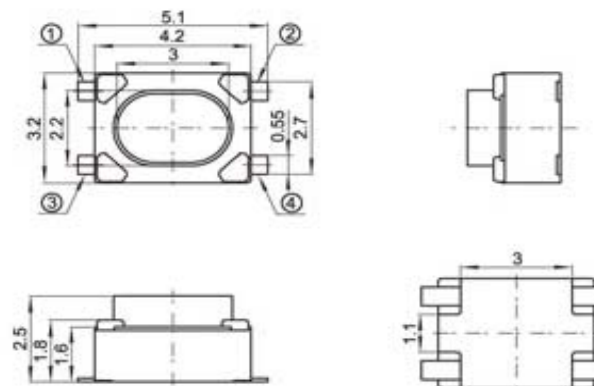

P.C.B Layout



Tact Switch 4,20 x 3,20mm

Part No.: **Q12008**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.02.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

EDCON-COMPONENTS



Ordering Informations

Serie	Total height w. Body	Fill with 0	Operating Force	Polarisation Peg	Electrical life	Fill with 0	ROHS	Packing		
Q12008	025	X	181	N	104	X	R	TRxxx		

025= 2,5mm

181 = 180gr	N = without Peg	104 = 100000 Cycles
251 = 250gr	Y = with Peg	
401 = 400gr		

N = non ROHS	BU = Bulk Ware
R = ROHS conform	TY = Tray Packing
	TR102 = Tape/Reel Packing 1000PCS

Tact Switch 4,20 x 3,20mm


Part No.: **Q12008**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.02.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3


Customer:



Soldering Profile for Lead Soldering

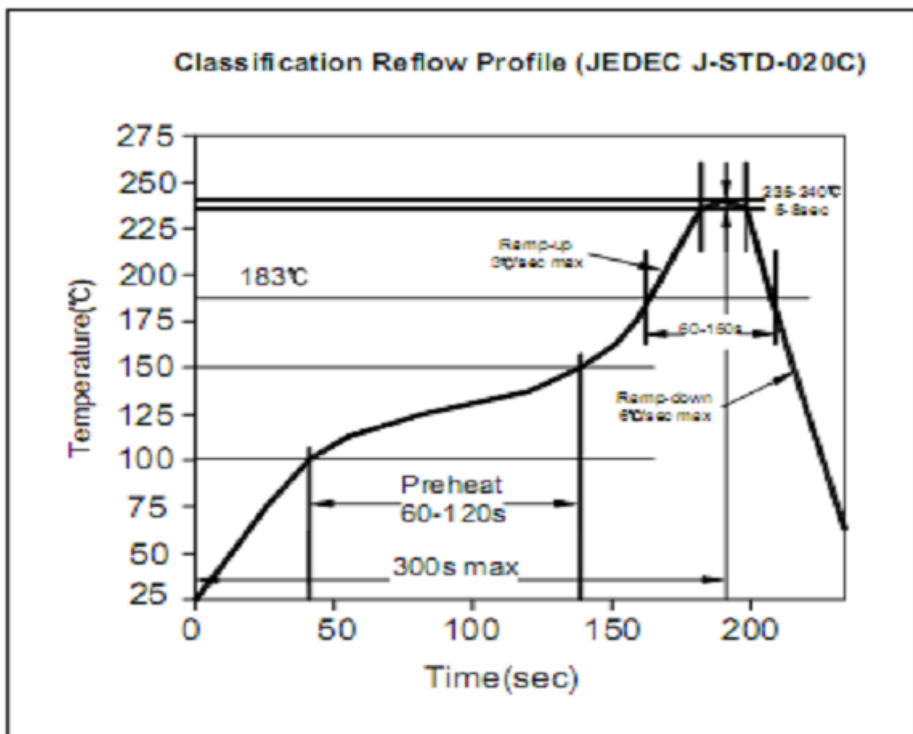

Soldering Profile for Lead Free Soldering

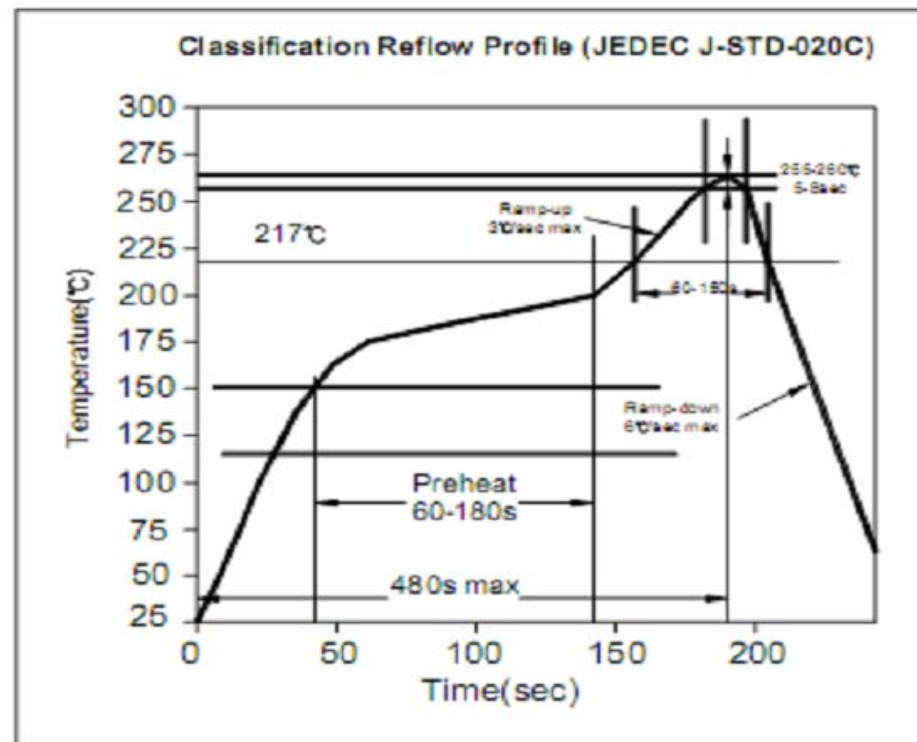

Tact Switch 4,20 x 3,20mm

Part No.: **Q12008**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.02.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.		32 from 3

Customer: