



EDCON-COMPONENTS





SPECIFICATION:

Current Rating: 50mA 12VDC
 Insulator Resistance: 100M Ohm min 100VDC
 Dielectric Withstanding: 250VAC for 1min.
 Operating Temperature: -30°C ~ +85°C
 Contact Resistance: 100m Ohm max.
 Travel: 0,25 ~ +/- 0,1mm

Drawing



P.C.B Layout



Tact Switch 4,70 x 3,50mm

Part No.: **Q12012**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

EDCON-COMPONENTS



Ordering Informations

Serie	Total height w. Body	Fill with 0	Operating Force	Polarisation Peg	Electrical life	Fill with 0	ROHS	Packing		
Q12012	021	X	090	N	104	X	R	TRxxx		

021 = 2,1mm

090 = 90gr	N = without Peg	104 = 100000 Cycles
181 = 180gr		
251 = 250gr		

N = non ROHS	BU = Bulk Ware
R = ROHS conform	TY = Tray Packing
	TR102 = Tape/Reel Packing 1000PCS

Tact Switch 4,70 x 3,50mm


Part No.: **Q12012**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	


Customer:



Soldering Profile for Lead Soldering

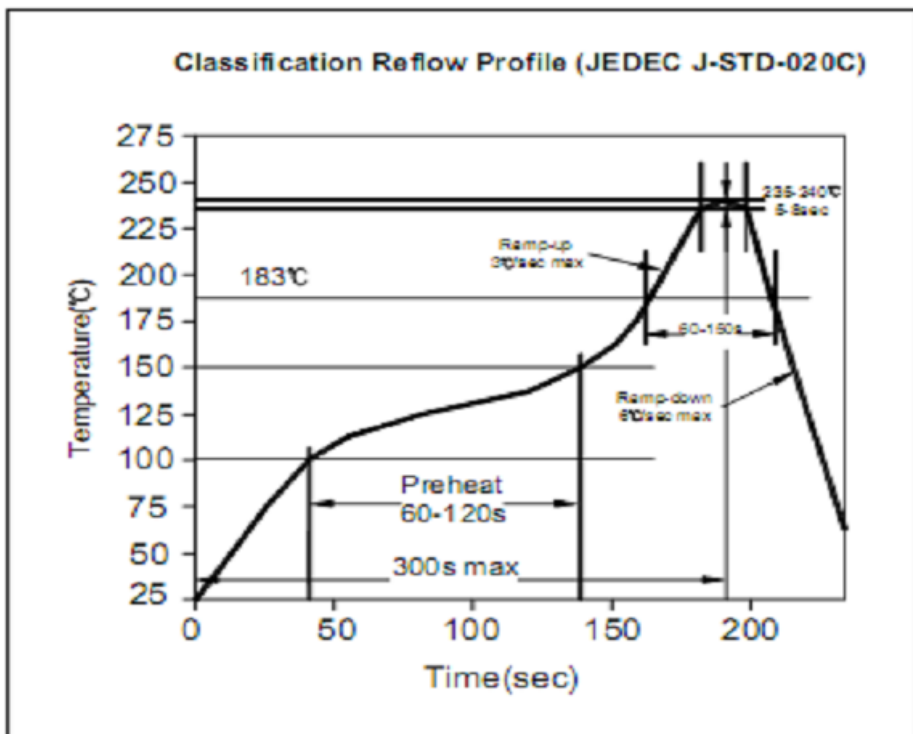

Soldering Profile for Lead Free Soldering

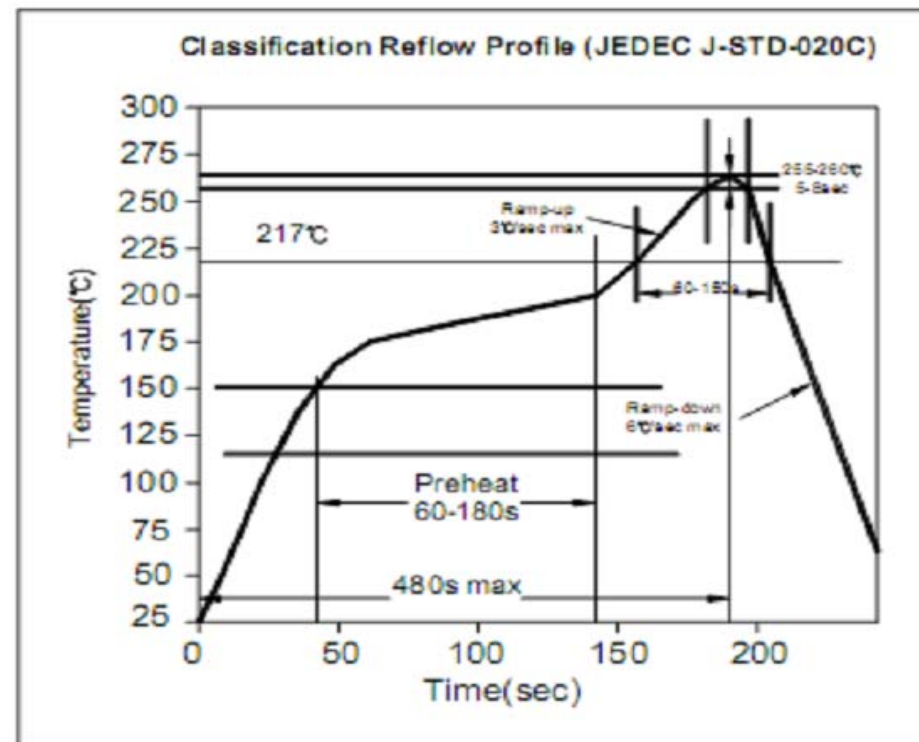

Tact Switch 4,70 x 3,50mm

Part No.: **Q12012**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	Customer:

www.edcon-components.com

email: info@edcon-components.com