



EDCON-COMPONENTS





SPECIFICATION:

Current Rating: 50mA 12VDC
 Insulator Resistance: 100M Ohm min 100VDC
 Dielectric Withstanding: 250VAC for 1 min.
 Operating Temperature: . -30°C ~ 85°C
 Contact Resistance: 100m Ohm max.
 Travel: 0,25 ~ +/- 0,1mm

Drawing



P.C.B Layout



Tact Switch 6,20 x 3,00mm

Part No.: **Q12013**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Total height w. Body	Fill with 0	Operating Force	Polarisation Peg	Electrical life	Fill with 0	ROHS	Packing		
Q12013	030	X	090	N	104	X	R	TRxxx		

030= 3,0mm

090 = 090gr	N = without Peg	104 = 100000 Cycles
181 = 180gr		

N = non ROHS	BU = Bulk Ware
R = ROHS conform	TY = Tray Packing
	TR102 = Tape/Reel Packing 1000PCS

Tact Switch 6,20 x 3,00mm


Part No.: **Q12013**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	12.02.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 2


Customer:



Soldering Profile for Lead Soldering

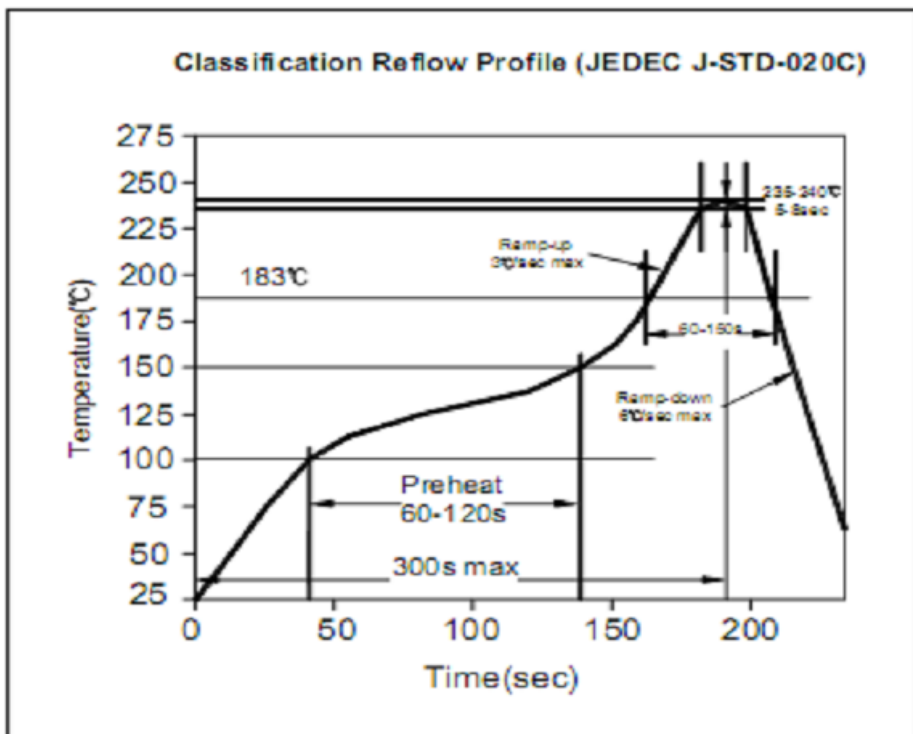

Soldering Profile for Lead Free Soldering

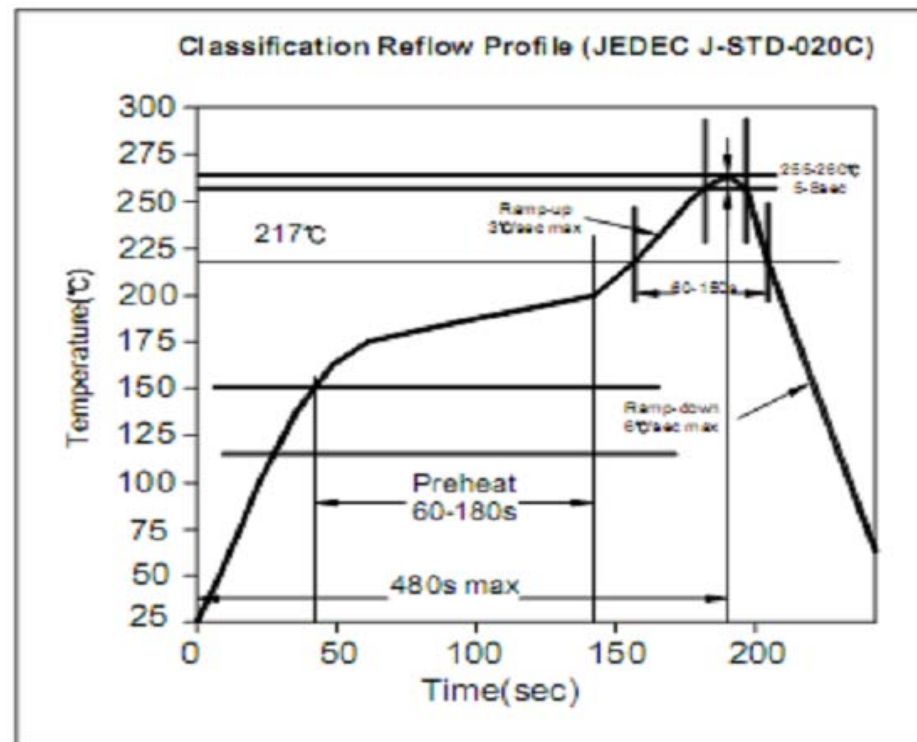

Tact Switch 6,20 x 3,00mm

Part No.: **Q12013**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.02.2008
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	Customer: