


EDCON-COMPONENTS





Specifications



Current Rating: 1,0A
 Insulation Resistance: 1000M Ohm min.
 Contact Resistance: 20milli Ohm max.
 Dielectric Voltage: 250V AC for one minute
 Operating Temperature: -40°C ~ to +105°C
 Insulator Material: LCP+30% G.F.(UL94V-0)

Contact Pin: Phosphor Bronze
 Contact Plating: Gold Flash all over

PCB Layout

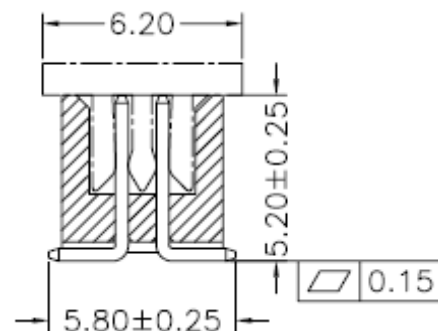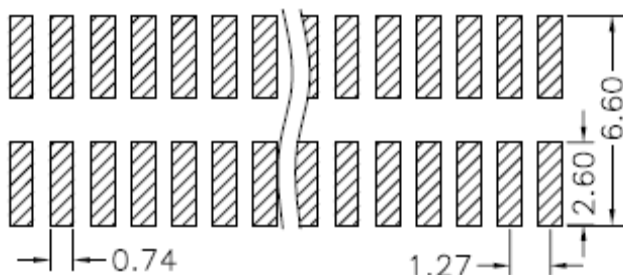


Drawing

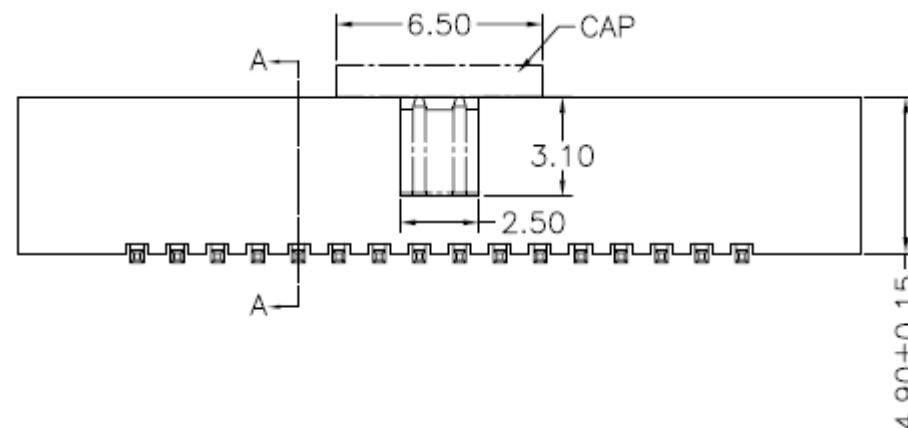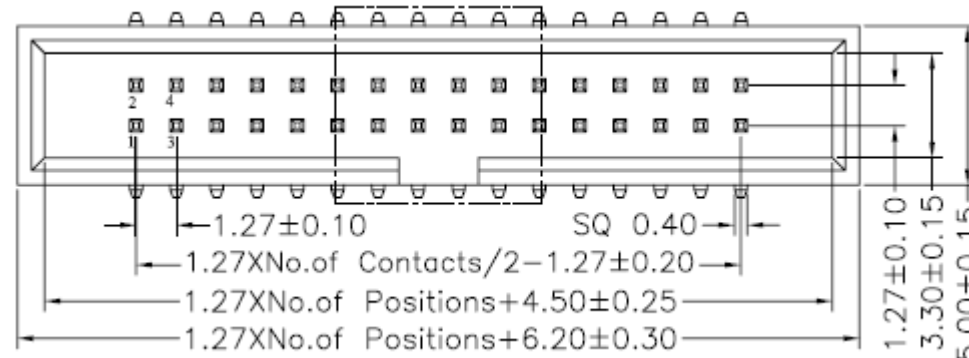

Box Header Pitch	
1,27x1,27mm	
Part No.:	T16C013-
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

EDCON-COMPONENTS



Ordering Informations


Serie	No. of Pos.	Contact Plating	Material	Color of Body	ROHS	Packing				
T16C013-	XX	G0	LC	BK	R	BU				

XX= 06,08, 10,12,14,16, 20,22,24,26, 30,34,40,44, 50,60,64,80,	G0= Gold Flash	LC= LCP +30% GF	BK= Black	N= NO ROHS conform	BU= Bulk Ware	
	T0= Tin plated					P6= PA6T +30% GF
	GA= 3µ Gold Plating	WH= White			TY= Tray Packing/Cap	
	GB= 5µ Gold Plating					TR= Tape/Reel w. Cap
	GC= 10µ Gold Plating					
	GD= 30µ Gold Plating					
	S0= Selectiv Plating Gold Flash / Tin					
	SD= Selectiv Tin/ 5µGold					
SD= Selectiv Tin/ 10µ Gold Flash	SD= Selectiv Tin/ 30µ Gold					
SD= Selectiv Tin/ 20µ Gold						


Box Header Pitch 1,27x1,27mm
Part No.: T16C013-
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3


EDCON-COMPONENTS



Soldering Profile for Lead Soldering (P.B.T.)

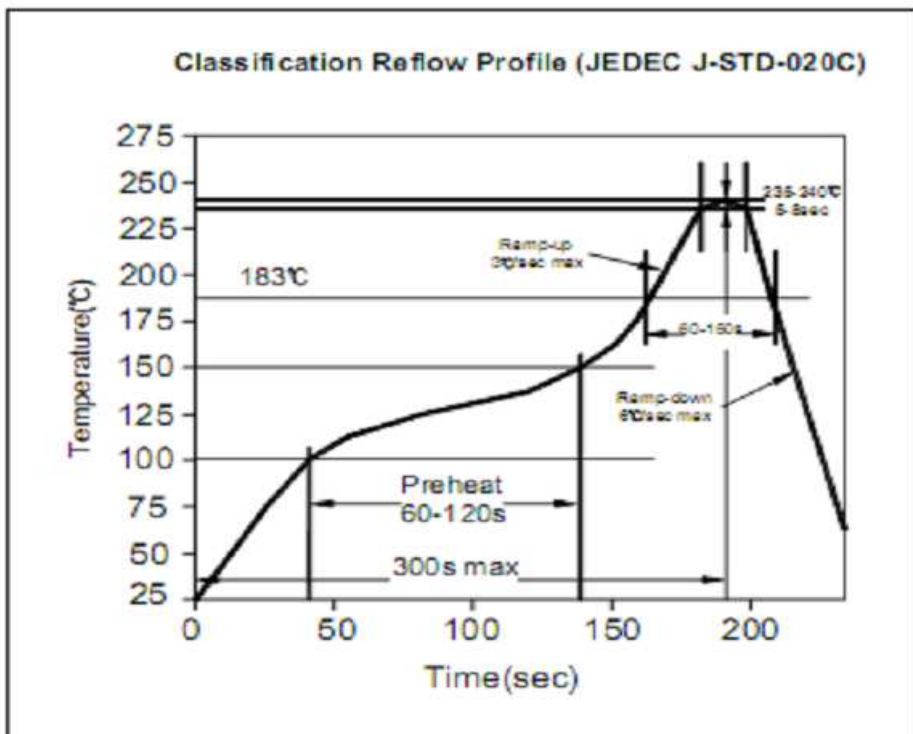

Soldering Profile for Lead Free Soldering (Nylon 6T)

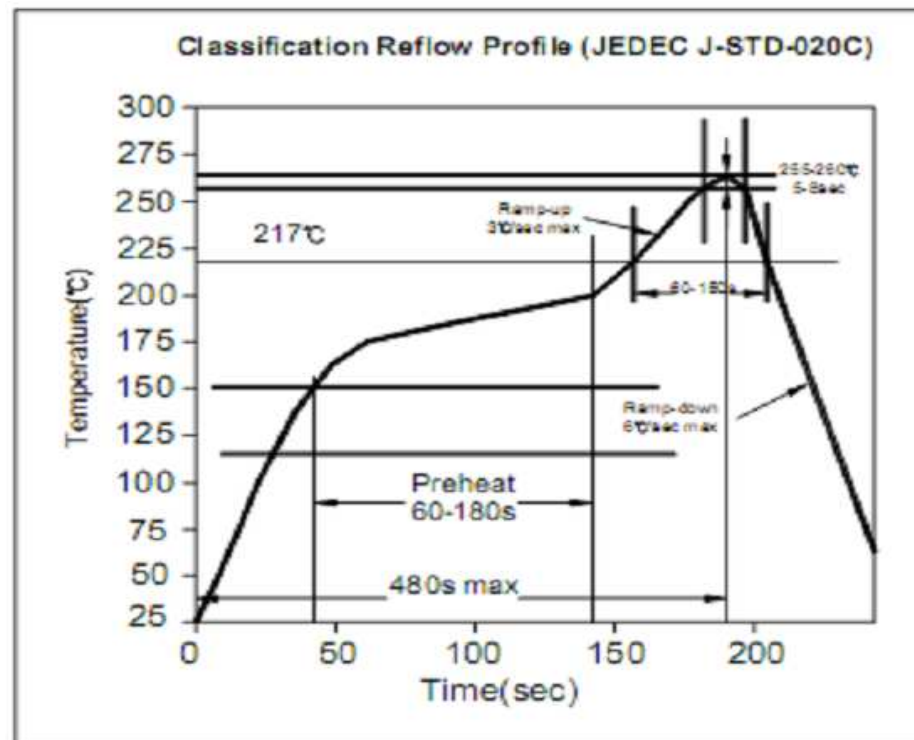

Box Header Pitch
1,27x1,27mm

Part No.: **T16C013-**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	Customer: