



EDCON-COMPONENTS



Technical Discription

Rated Current: 1,0A
 Contact Resistance: 30m Ω max.
 Withstanding Voltage: 500V AC/DC
 Insulation Resistance: 1000M Ω min.
 Operating Temperature: . -55°C ~ + 85°C

Material: Phosphor Bronze
 Contact: SN over Ni
 Contact Plating: Thermoplastic UL94V-0
 Insulator:




FPC Thickness

PCB Layout (Tol. +/- 0,05mm)



Drawing

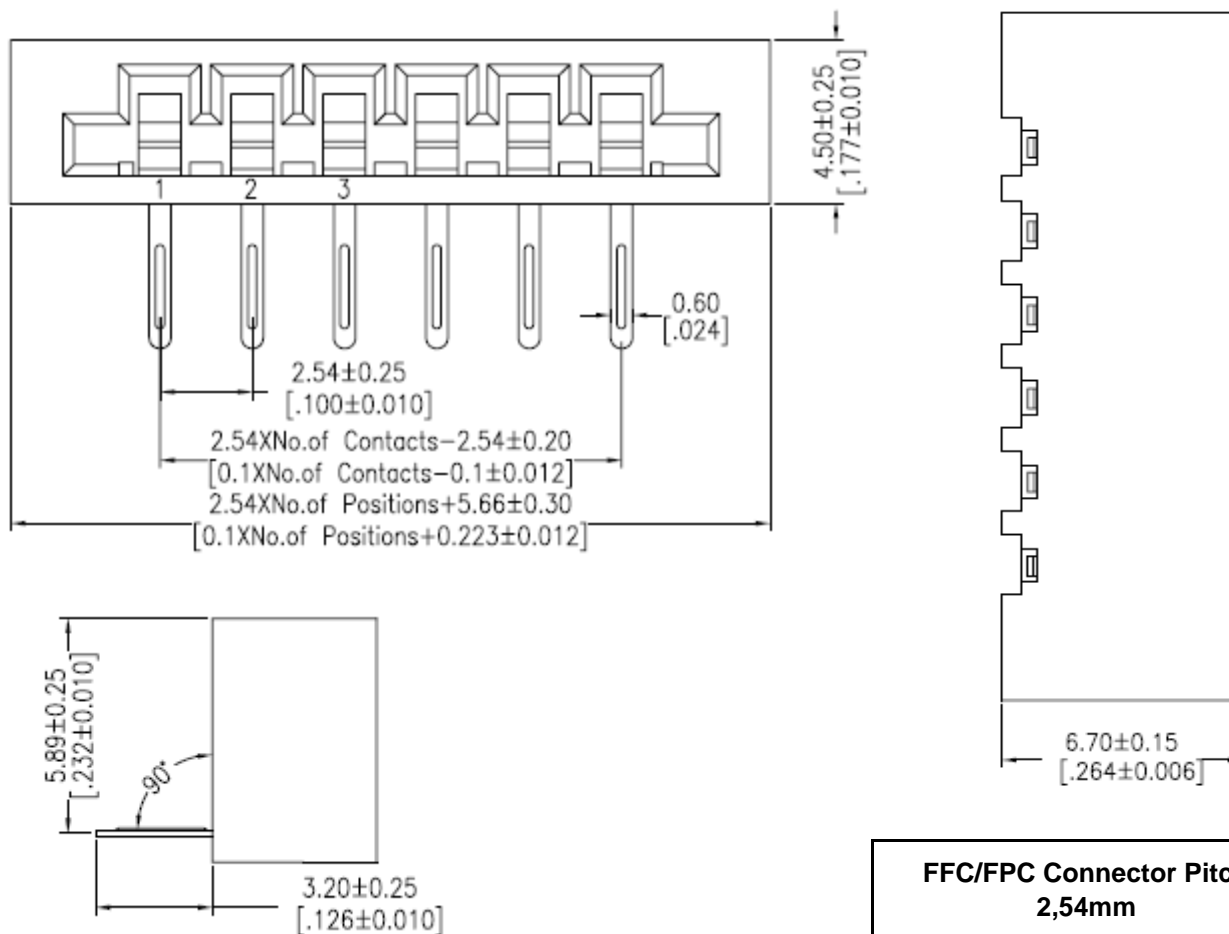


**FFC/FPC Connector Pitch
2,54mm**

Part No.: **T28L003**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.07.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

EDCON-COMPONENTS



Ordering Informations

Serie	No. Pos.	Contact Plating	Body color	Spezial Function	ROHS	Packing				
-------	----------	-----------------	------------	------------------	------	---------	--	--	--	--

T28L003	02	TN	1	0	R	TU				
----------------	-----------	-----------	----------	----------	----------	-----------	--	--	--	--

02 ~ 37	TN= tin plated	BK= Black	0= No function	R= ROHS Conform	BU= Bulk-Ware
		BN= Bronw			TR= Tape Reel
		WH= White			TY= Tray Packing
		BE= Beige			


FFC/FPC Connector Pitch 2,54mm
Part No.: T28L003
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.07.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)

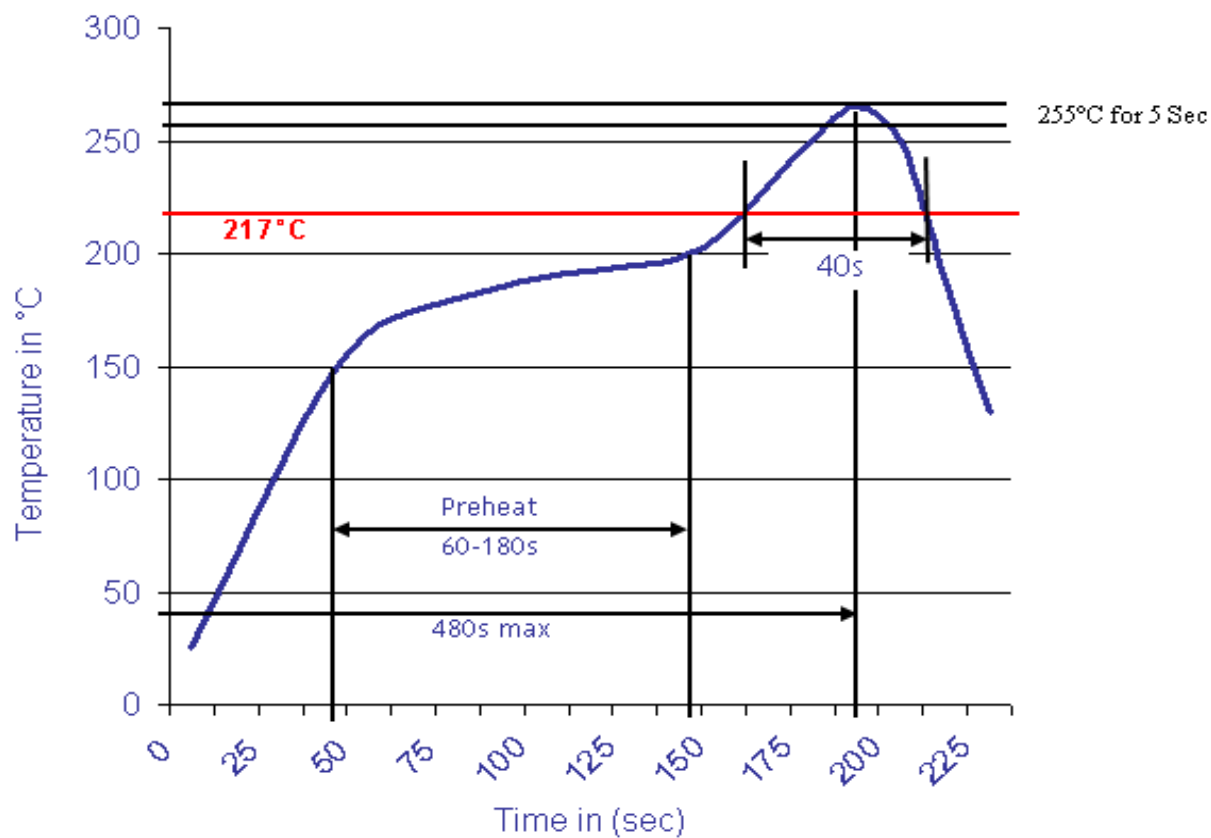

FFC/FPC Connector Pitch 2,54mm	
Part No.:	T28L003
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	04.07.2013
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	