

# EDCON-COMPONENTS





## Technical Description

Rated Current: 1,0A  
 Contact Resistance: 30m Ω max.  
 Withstanding Voltage: 500V AC/DC  
 Insulation Resistance: 1000M Ω min.  
 Operating Temperature: . -55°C ~ + 85°C



Material: Phosphor Bronze  
 Contact: SN over Ni  
 Contact Plating: SN over Ni  
 Insulator: Thermoplastic UL94V-0

## Drawing

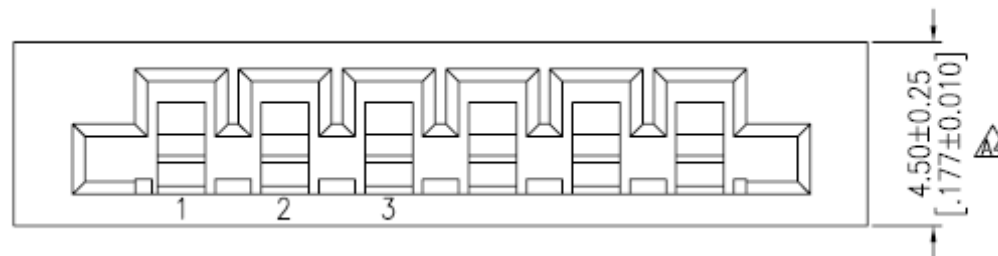

FPC Thickness

PCB Layout (Tol. +/- 0,05mm)

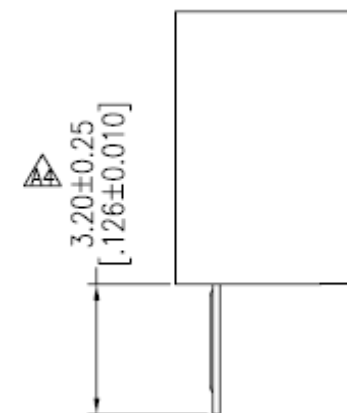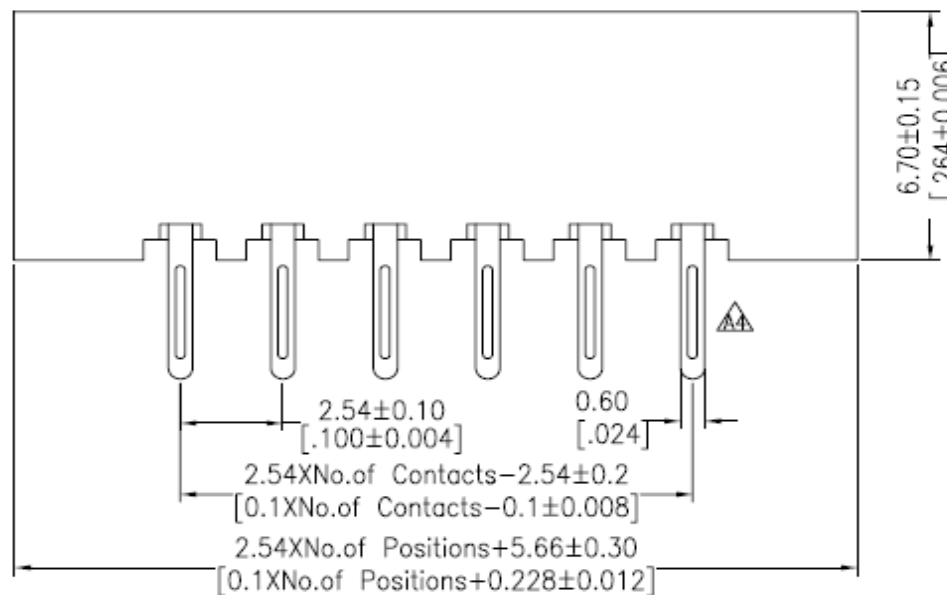

**FFC/FPC Connector Pitch  
2,54mm**

Part No.: **T28L004**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	28.01.2014	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3		

# EDCON-COMPONENTS



## Ordering Informations


Serie	No. Pos.	Contact Plating	Body color	Spezial Function	ROHS	Packing				
-------	----------	-----------------	------------	------------------	------	---------	--	--	--	--

<b>T28L004</b>	<b>02</b>	<b>TN</b>	<b>1</b>	<b>0</b>	<b>R</b>	<b>TU</b>				
----------------	-----------	-----------	----------	----------	----------	-----------	--	--	--	--

<b>02 ~ 37</b>	<b>TN= tin plated</b>	<b>1= Black</b>	<b>0= No function</b>	<b>R= ROHS Conform</b>	<b>BU= Bulk-Ware</b>
		<b>2= Brouwn</b>			<b>TR= Tape Reel</b>
		<b>3= White</b>			<b>TY= Tray Packing</b>
		<b>4= Beige</b>			

<b>FFC/FPC Connector Pitch</b> <b>2,54mm</b>
Part No.: <b>T28L004</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	28.01.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



FFC/FPC Connector Pitch 2,54mm	
Part No.:	<b>T28L004</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	28.01.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	