







EDCON-COMPONENTS



Specifications

| | |
|------------------------|-------------------------|
| Current Rating: | 3,0 Amp. |
| Insulation Resistance: | 1000M Ohm min. |
| Contact Resistance: | 20milli Ohm max. |
| Dielectric Voltage: | 1000V AC for one minute |
| Operating Temperature: | . -40°C ~ to +105°C |
| Insulator Material: | PBT+30% G.F.(UL94V-0) |
| Contact Pin: | Brass |
| Contact Plating: | Gold over Ni. |

Drawing

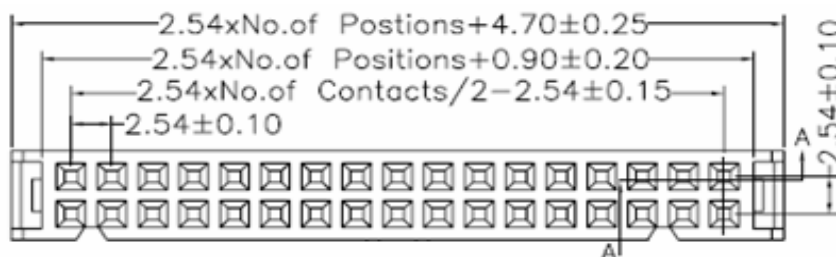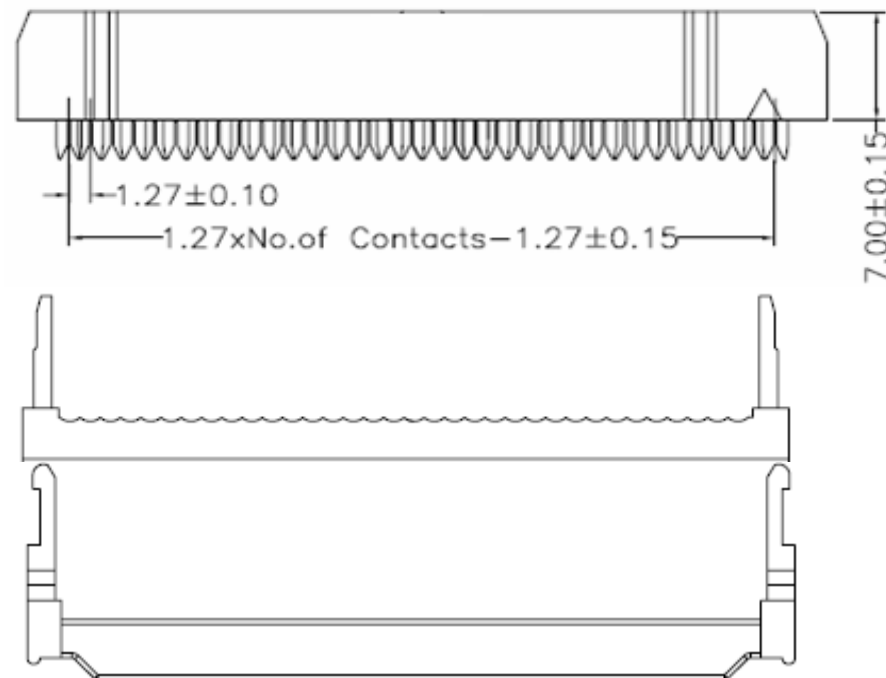


| | |
|--|-----------------|
| IDC CONNECTOR Pitch 2,54x2,54mm | |
| Part No.: | T33A1002 |
| Customer: | |

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 10.04.2009 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 1 from 2 |

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

| Serie | No. of Pos. | Contact Plating | Material | Color of Body | Special Function | ROHS | Packing | | | |
|-----------------|-------------|-----------------|-----------|---------------|------------------|----------|-----------|--|--|--|
| T33A1002 | XX | G0 | PB | BK | Y | R | BU | | | |

| | | | | | | |
|--|---|---------------------------------------|---|---|---|---|
| XX = 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26, 30, 34, 36, 40, 44, 50, 60, 64 | G0 = Gold Flash | PB = PBT +30% GF f. ROHS | BK = Black GR = Gray (427°C) EG = Gray (413°C) | Y = w. Strain relief N = w/o Strain relief | N =NO ROHS conform R =ROHS conform | BU = Bulk Ware TU = Tube Packing TY = Tray |
| | T0 = Tin plated | | | | | |
| | GA = 3µ Gold Plating | | | | | |
| | GB = 5µ Gold Plating | | | | | |
| | GC = 10µ Gold Plating | | | | | |
| | GD = 30µ Gold Plating | | | | | |
| | S0 = Selectiv Plating Gold Flash / Tin | | | | | |
| | SD = Selectiv Tin/ 5µGold | | | | | |
| SD = Selectiv Tin/ 10µ Gold Flash | | | | | | |
| SD = Selectiv Tin/ 20µ Gold | SD = Selectiv Tin/ 30µ Gold | | | | | |

**IDC CONNECTOR Pitch
2,54x2,54mm**

Part No.: **T33A1002**

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 10.04.2009 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 2 from 2 |

Customer: