
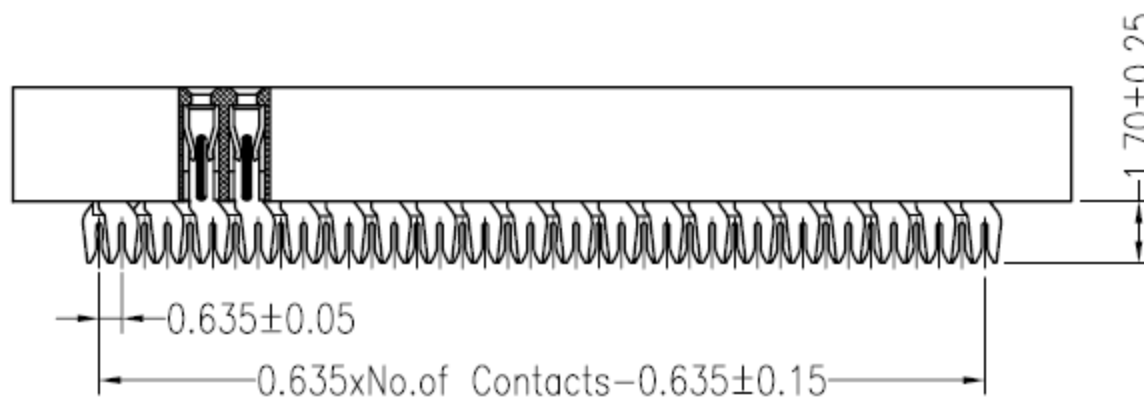
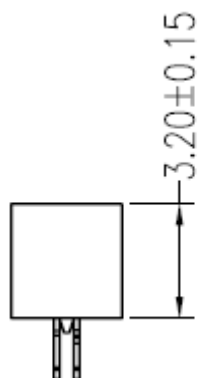


Specifications

Current Rating:	1 Ampere
Insulator Resistance:	1000 Megaohm min.
Contact Resistance:	20m Ohm max.
Dielectric Withstanding:	AC 500V
Operating Temperature:	.-40°C to +105°C
Contact Material:	Phosphor Bronze
Insulator Material:	PBT + 30% GF (UL94V-0)
Contact Plating:	Au over Ni

Drawing

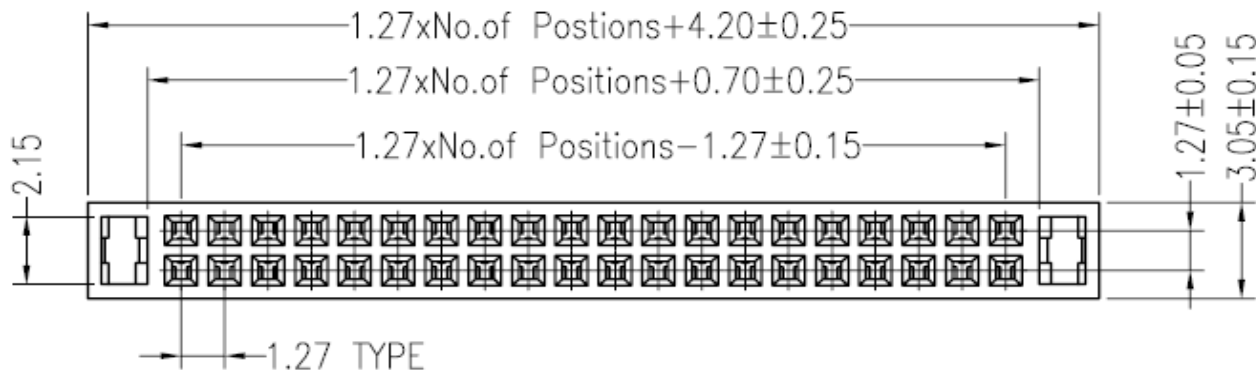



IDC Header Pitch 1,27x1,27mm

Part No.: **T33C1002**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.02.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

Drawing

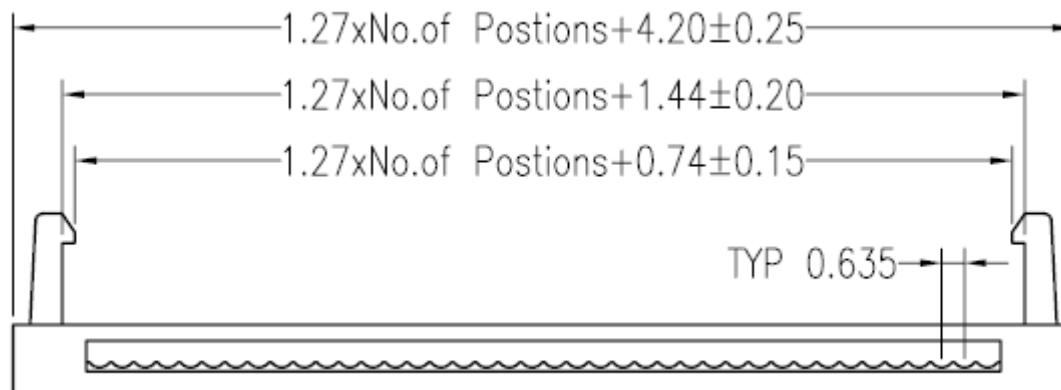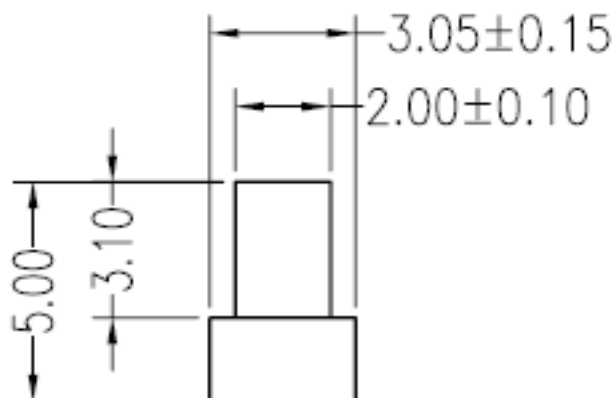

IDC Header Pitch 1,27x1,27mm

Part No.: T33C1002

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.02.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Bump	Contact Plating	Material	Color of Base	ROHS	Packing			
T33C1002	06	0	G0	PB	BK	R	BU			

06, 10, 12, 14, 16, 20, 24, 26P	0= without Bump	G0= Gold Flash	PB=P.B.T	BK= Black	N=NO ROHS conform	BU= Bulk		
		T0= Tin plated				GY= Gray		TY= Tray Packing
		GA= 10µ Gold Plating				R=ROHS conform		
		GB= 15µ Gold Plating						
		GC= 20µ Gold Plating S0= Selectiv Plating Gold Flash / Tin						

IDC Header Pitch 1,27x1,27mm

Part No.: **T33C1002**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.02.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3		