







EDCON-COMPONENTS






Specifications

Current Rating:	9,0A
Insulation Resistance:	1500M Ohm min.
Contact Resistance:	20milli Ohm max.
Dielectric Voltage:	600V AC for one minute
Operating Temperature:	. -25°C ~ to +85°C
Insulator Material:	High Temperature Plastic UL94V
Contact Pin:	Brass
Contact Plating:	Sn over Ni.
	Stamped Pin

Drawing

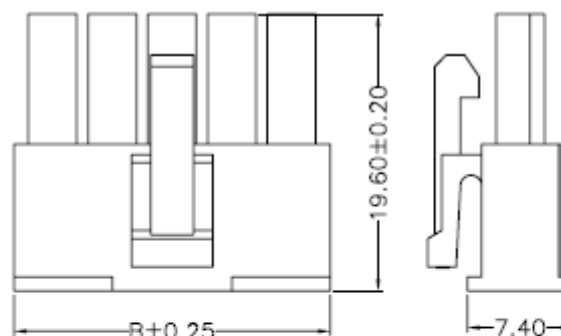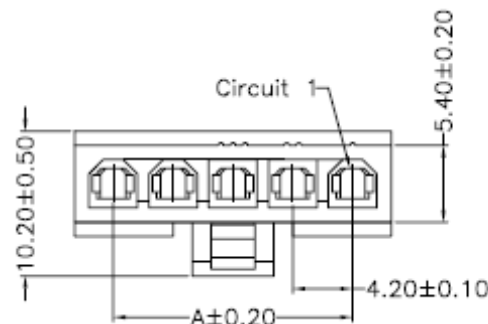

4P, 5P



3P


**MINI FIT CONNECTOR
4,20mm**

Part No.: **T45001**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.08.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	


EDCON-COMPONENTS



Pin Code length table free configuration

Dimension (mm)				
	A	B		
2	4,20	9,60		
3	8,40	13,80		
4	12,60	18,00		
5	16,80	22,20		


Dimension (mm)				

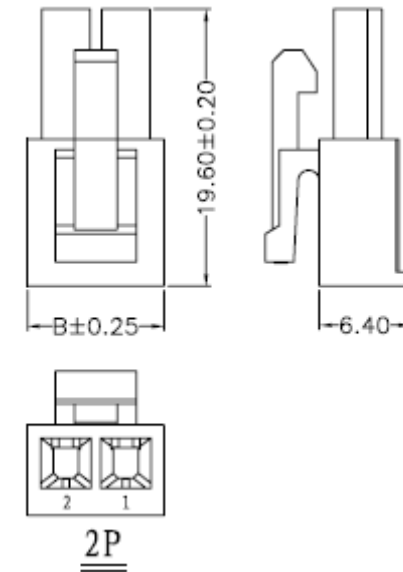

MINI FIT CONNECTOR	
4,20mm	
Part No.:	T45001
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.08.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Material Body	Plastic Material	Color	ROHS	Packing				
T45001	XX	V0	HT	WH	R	BU				

XX=2, 3, 4, 5,	V0= Material V0	HT= High Temperatur Plastic	WH= White	N=NO ROHS conform	BU= Bulk Ware (Standard)
	V2= Material V2			R=ROHS conform	

**MINI FIT CONNECTOR
4,20mm**

Part No.: **T45001**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.08.2011
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3

Customer: