


EDCON-COMPONENTS



Specifications

| | |
|------------------------|--------------------------------|
| Current Rating: | 9,0A |
| Insulation Resistance: | 1500M Ohm min. |
| Contact Resistance: | 20milli Ohm max. |
| Dielectric Voltage: | 600V AC for one minute |
| Operating Temperature: | -25°C ~ to +85°C |
| Insulator Material: | High Temperature Plastic UL94V |
| Contact Pin: | Brass |
| Contact Plating: | Sn over Ni. |
| | Stamped Pin |

Drawing

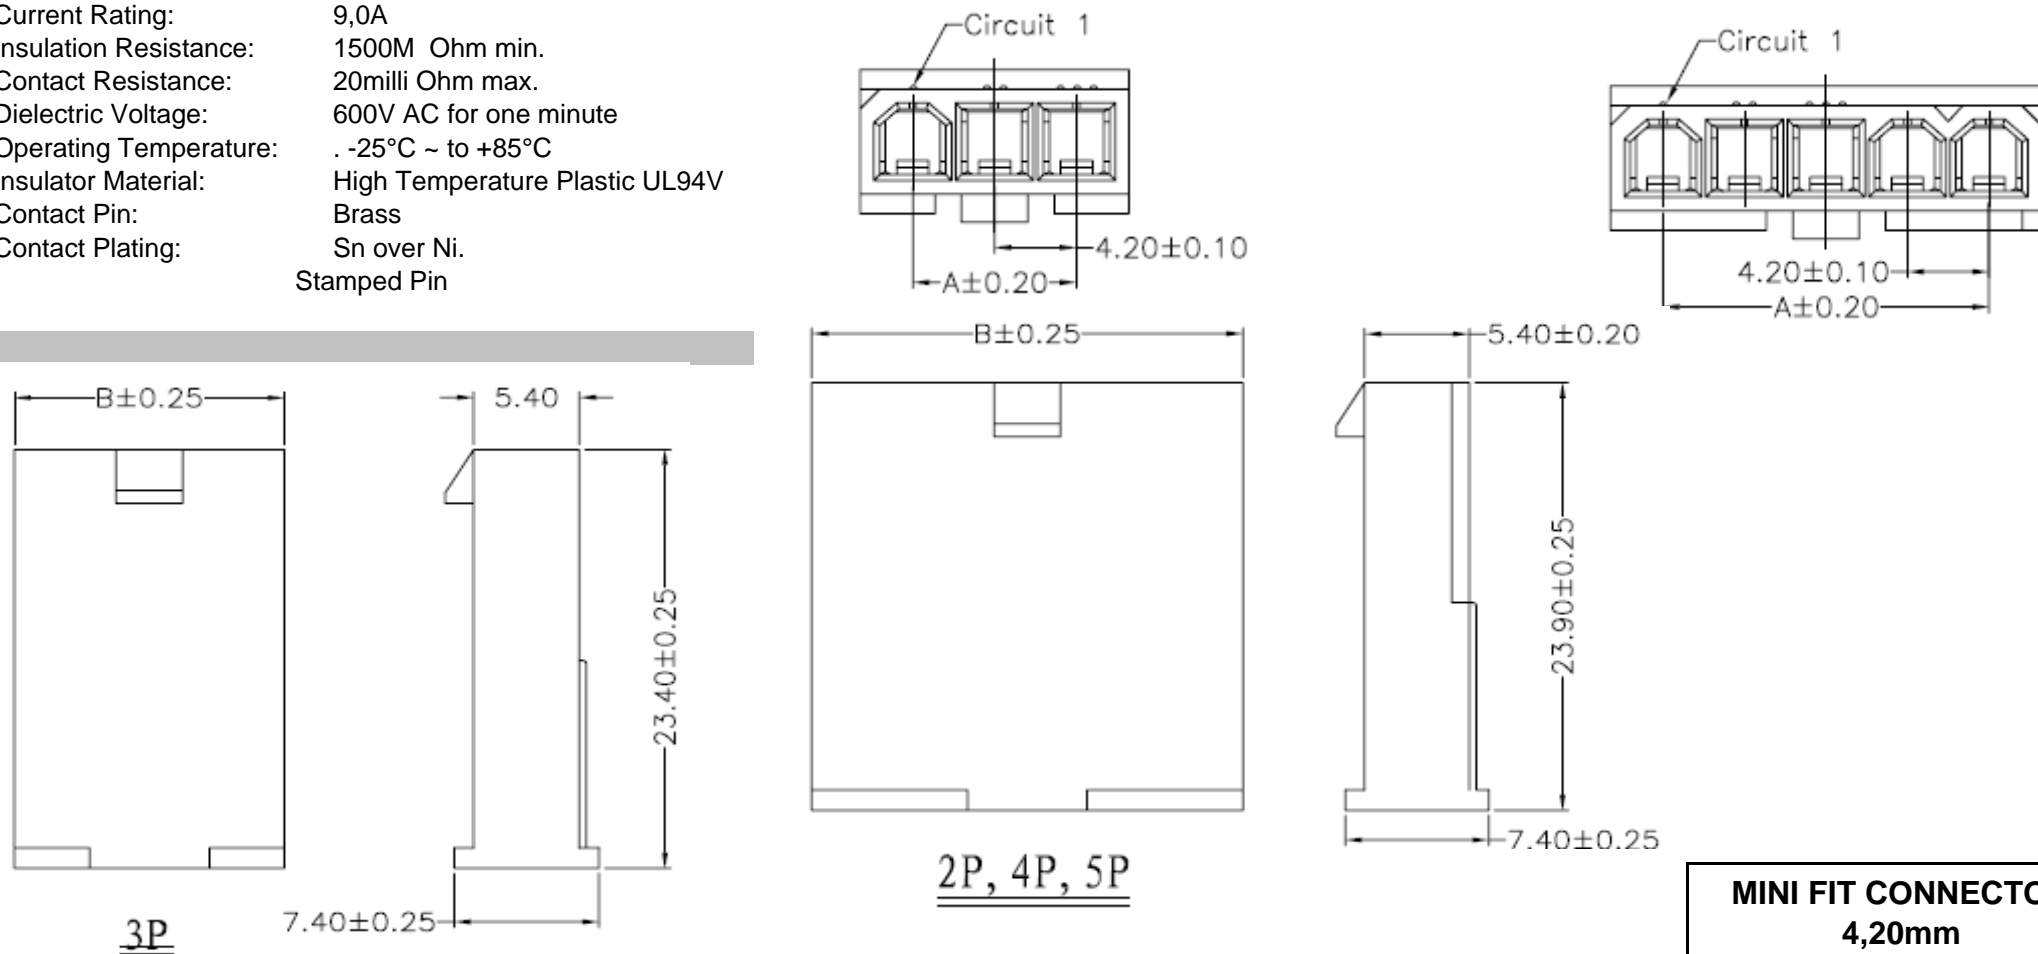

| | |
|---------------------------|---------------|
| MINI FIT CONNECTOR | |
| 4,20mm | |
| Part No.: | T45003 |
| Customer: | |

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|----------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 10.04.2009 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | 1 from 3 | |

EDCON-COMPONENTS



Ordering Informations

| Serie | No. of Pos. | Contact Plating | Plastic Material | Color | ROHS | Packing | | | | |
|---------------|-------------|-----------------|------------------|-----------|----------|-----------|--|--|--|--|
| T45003 | XX | T0 | HT | WH | R | BU | | | | |

| | | | | | |
|------------------------|------------------------|-------------------------------------|-------------------|---------------------------|-----------------------------------|
| XX =2, 3, 4, 5, | T0 = Tin plated | HT = High Temperatur Plastic | WH = White | N =NO ROHS conform | BU = Bulk Ware (Standard) |
| | | | | R =ROHS conform | TU = Tube Packing |

**MINI FIT CONNECTOR
4,20mm**

Part No.: **T45003**

| | | | | | | | | | |
|-------|--------|------|--------|--------|--------|-----------|-----------|------|------------|
| DRW: | Jason | CHKD | Wilson | MATL: | Wilson | TOLERANCE | Mason | DATE | 10.04.2009 |
| APPD: | Schumi | | | FINISH | Jamy | | Sheet No. | | 3 from 3 |

Customer: