







EDCON-COMPONENTS



Specifications

Current Rating:	9,0A
Insulation Resistance:	1500M Ohm min.
Contact Resistance:	20milli Ohm max.
Dielectric Voltage:	600V AC for one minute
Operating Temperature:	. -25°C ~ to +85°C
Insulator Material:	High Temperature Plastic UL94V
Contact Pin:	Brass
Contact Plating:	Sn over Ni.

Drawing

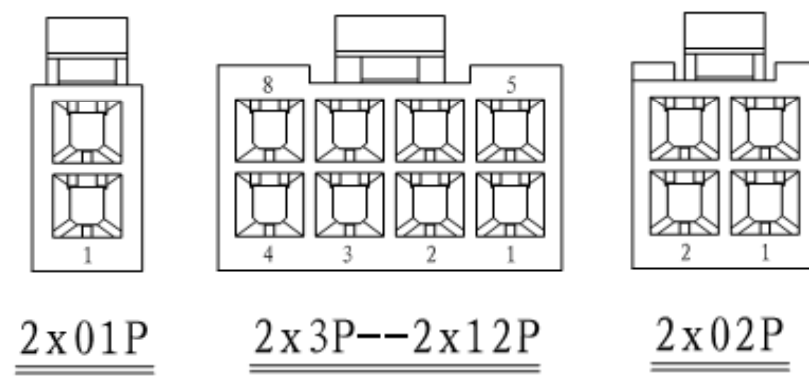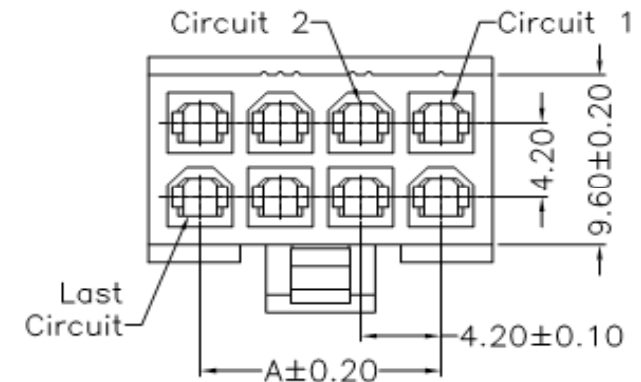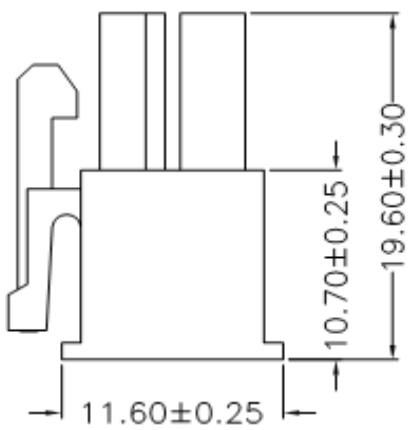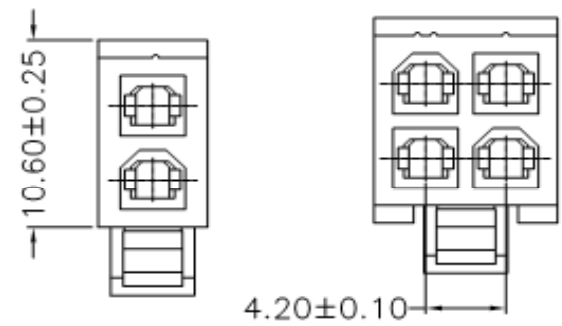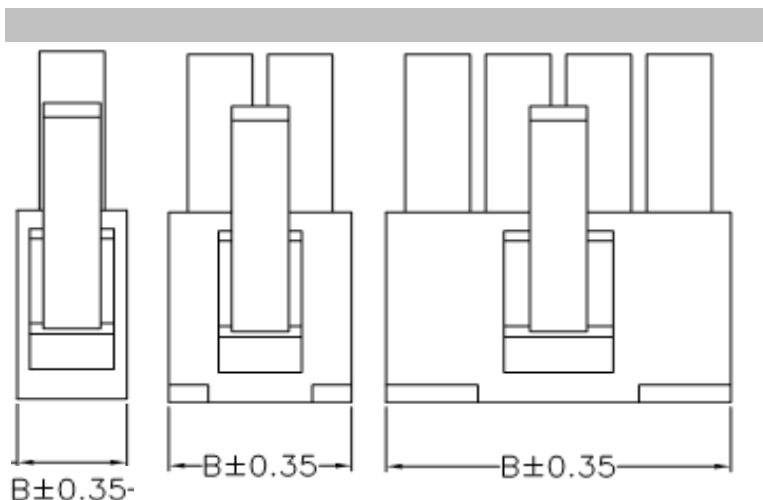


MINI FIT CONNECTOR	
4,20mm	
Part No.:	T45016
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

www.edcon-components.com

email: info@edcon-components.com



Ordering Informations

Serie	No. of Pos.	No Function	Plastic Material	Color	ROHS	Packing				
T45016	XX	NO	HT	WH	R	BU				

XX =2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24	NO = No function	HT = High Temperatur Plastic	WH = White BK = Black (Glow wire capable)	N =NO ROHS R =ROHS conform	BU = Bulk Ware (Standard)
---	-------------------------	-------------------------------------	--	---	----------------------------------

MINI FIT CONNECTOR 4,20mm
Part No.: T45016
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	10.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3