


EDCON-COMPONENTS




Specifications


Current Rating: 1,0A
 Insulation Resistance: 1000M Ohm min.
 Contact Resistance: 20milli Ohm max.
 Dielectric Voltage: 500V AC for one minute
 Operating Temperature: . -40°C ~ to +105°C

Contact Pin: Phosphor Bronze
 Contact Plating: Sn over Ni
 Insulator Material: PBT/PA6T/PA46 UL94V-0
 High Temperature

PCB Layout

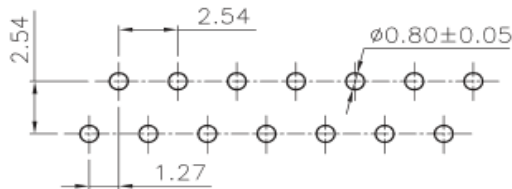

Drawing

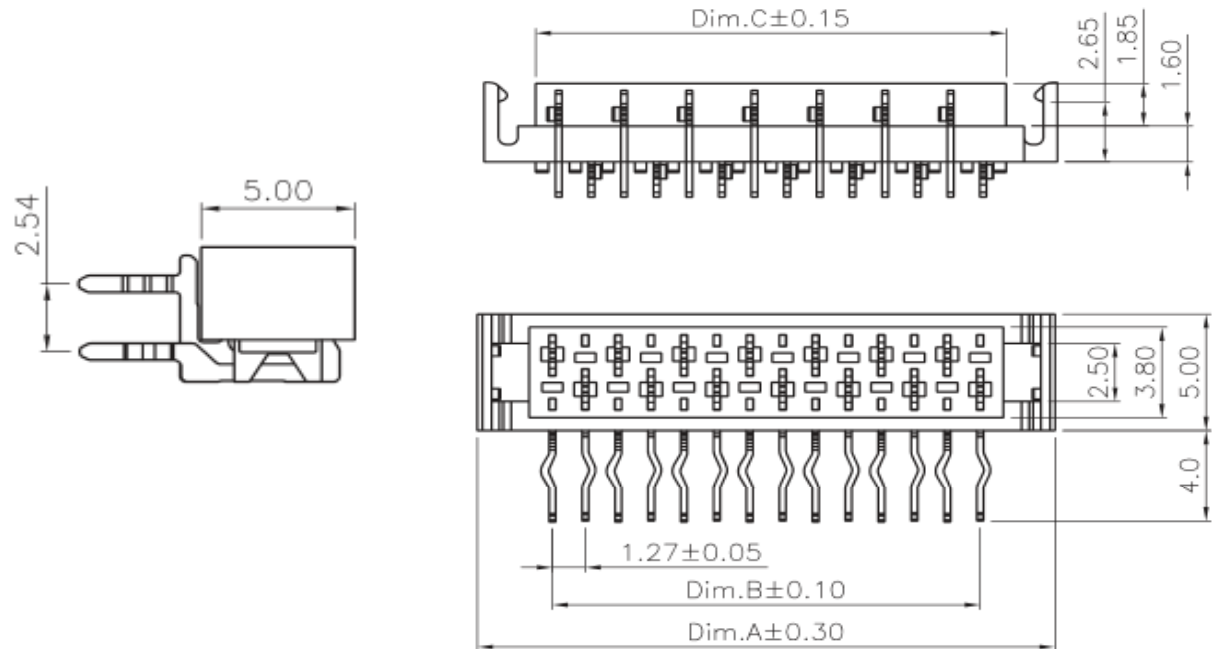

**Micro Match Connector
from EDCON**

Part No.: **T46014 -**


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	11.10.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4

Customer:

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS




Pin Code length table free configuration

Dimension (mm)				
Pos	A	B	C	
4	9,70	3,81	5,60	
6	12,24	6,35	8,14	
8	14,78	8,89	10,68	
10	17,32	11,43	13,22	
12	19,86	13,97	15,76	
14	22,40	16,51	18,30	
16	24,94	19,05	20,84	
18	27,48	21,59	23,38	
20	30,02	24,13	25,92	
22	32,56	26,67	28,46	
24	35,10	29,21	31,00	
26	37,64	31,75	33,54	

Micro Match Connector from EDCON	
Part No.:	T46014 -
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	11.10.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

EDCON-COMPONENTS




Ordering Informations

Serie	No. of Pos.	Contact Plating	Material	Color of Body	ROHS	Packing				
T46014 -	XX	T0	PB	RD	R	BU				


XX= 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, 24, 26	G0= Gold Flash	PB= PBT	RD= Red	N= NO ROHS	BU= Bulk Ware
	T0= Tin plated Stand	PA= PA6T +30% GF f. ROHS		R= ROHS conform	TU= Tube Packing
	GA= 3µ Gold Plating	P4= PA 46			TY= Tray
	GB= 5µ Gold Plating				
	GC= 10µ Gold Plating				
	GD= 30µ Gold Plating				
	S0= Selectiv Plating Gold Flash / Tin				
	SD= Selectiv Tin/ 5µGold				
SD= Selectiv Tin/ 10µ Gold Flash					
SD= Selectiv Tin/ 20µ Gold	SD= Selectiv Tin/ 30µ Gold				

Micro Match Connector from EDCON	
Part No.:	T46014 -
Customer:	


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	11.10.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile for Lead Soldering (P.B.T.)

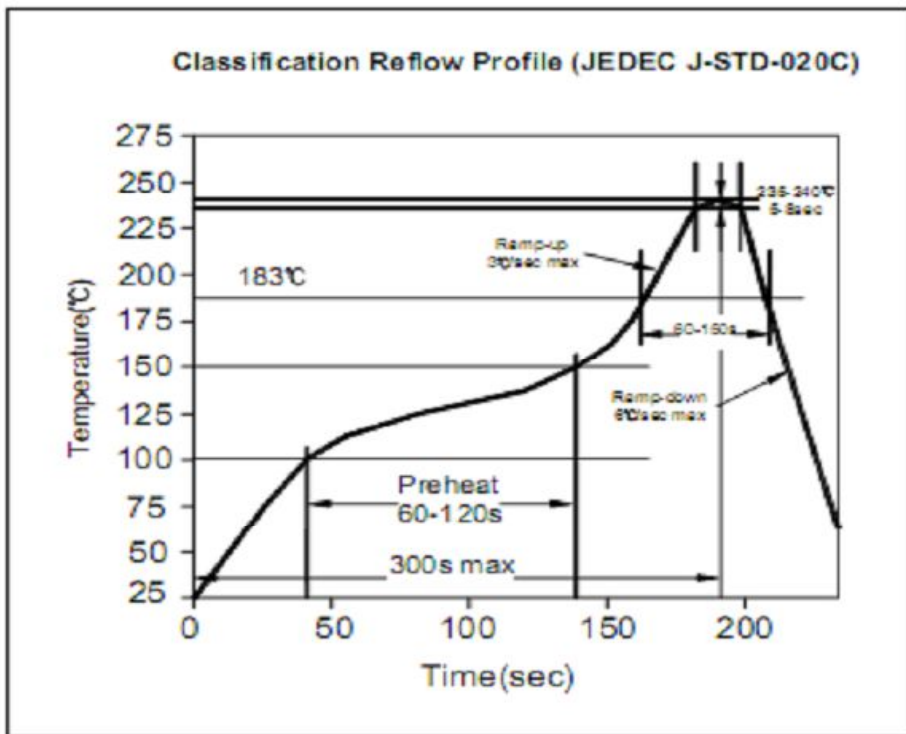

Soldering Profile for Lead Free Soldering (Nylon 6T)

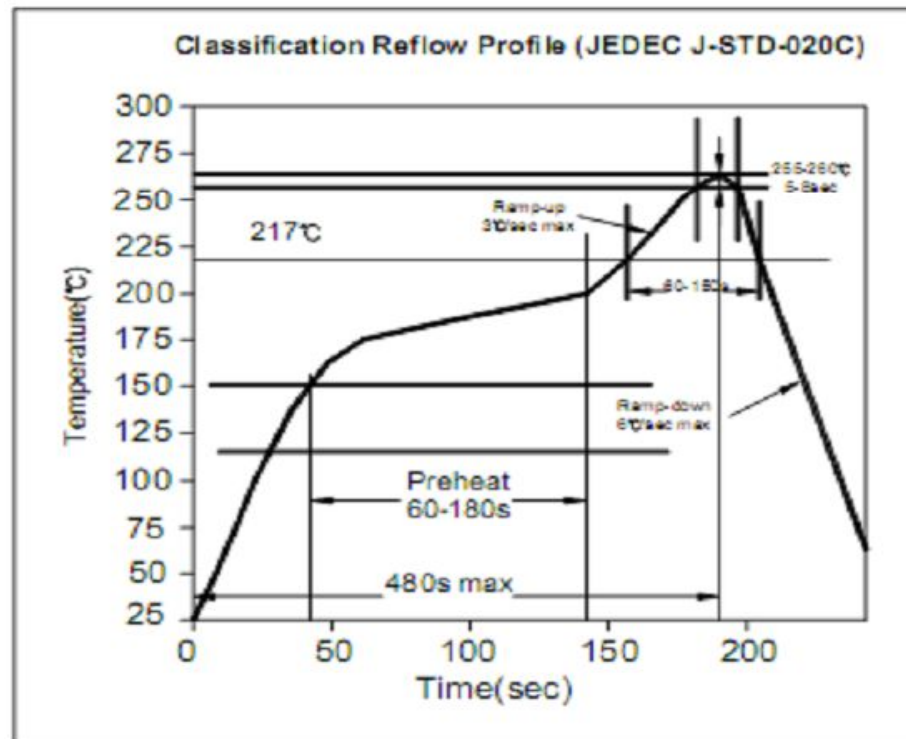

**Micro Match Connector
from EDCON**

Part No.: **T46014 -**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	11.10.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 4