



EDCON-COMPONENTS





Specifications

Current Rating:	5,0A
Insulation Resistance:	1000M Ohm min.
Contact Resistance:	10milli Ohm max.
Dielectric Voltage:	1500V AC for one minute
Operating Temperature:	. -25°C ~ to +85°C
Insulator Material:	High Temperature Plastic UL94V
Contact Pin:	Brass
Contact Plating:	Sn over Ni.

PCB Layout

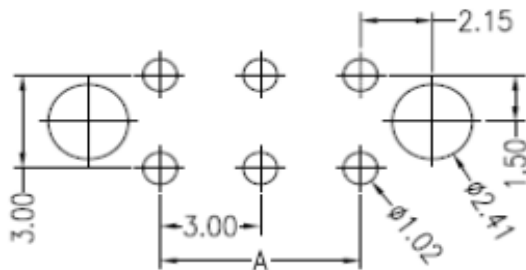

Drawing

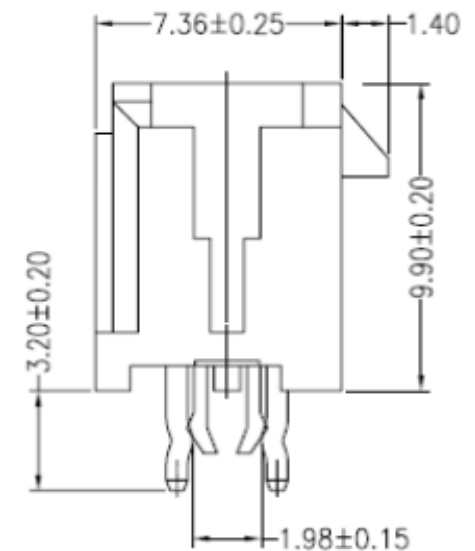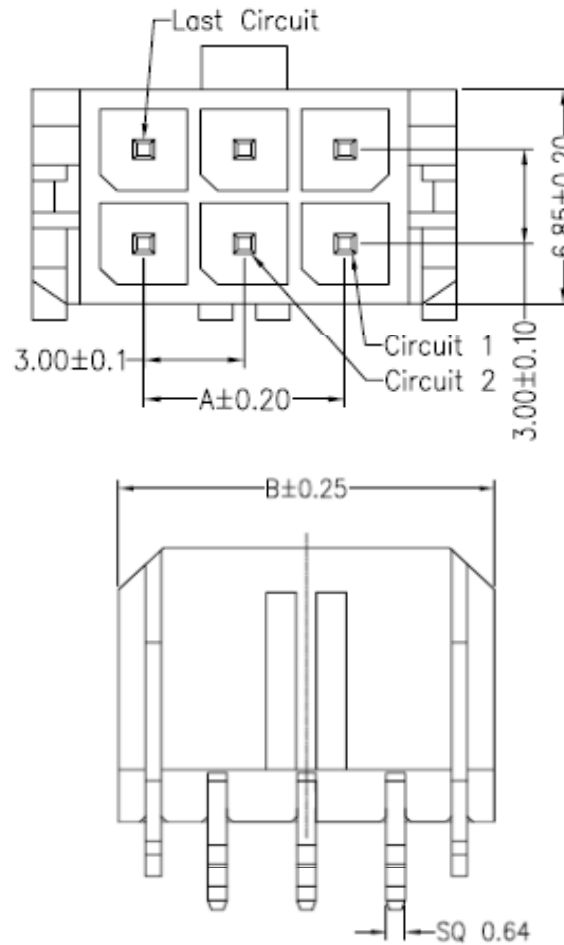

MICRO FIT CONNECTOR
3,00mm


Part No.: **T48022**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.03.2021
APPD:	Schumi			FINISH	Jamy			Sheet No.	1 from 4

www.edcon-components.com

email: info@edcon-components.com



Ordering Informations

Serie	No. of Pos.	Contact Plating	Plastic Material	Color	ROHS	Packing				
T48022	XX	T0	HT	BK	R	BU				

XX =2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12	T0 = Tin plated	HT = High Temperatur Plastic	BK = Black	N =NO ROHS	BU = Bulk Ware
	G0 = Gold Flash plated			R =ROHS conform	TU = Tube Packing w. Cap
	GA = 15µ Gold plated		TR = Tape / Reel		


MICRO FIT CONNECTOR 3,00mm	
Part No.:	T48022
Customer:	


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.03.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4

www.edcon-components.com


email: info@edcon-components.com

Copyright by S.Tiede
EDCON-COMPONENTS






Soldering Profile for Lead Soldering (P.B.T.)

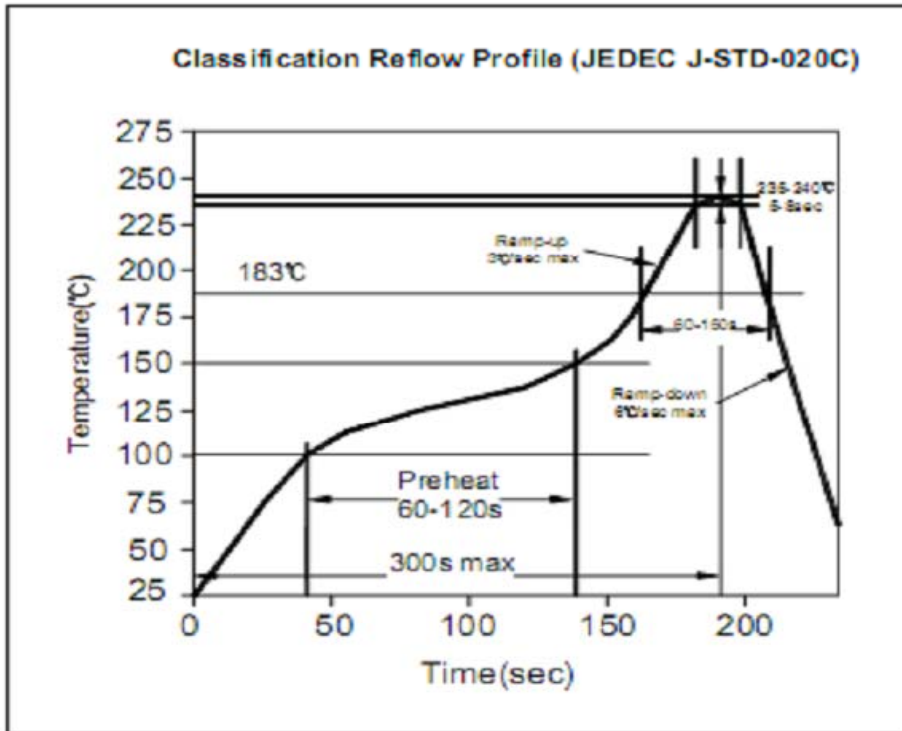

Soldering Profile for Lead Free Soldering (Nylon 6T)

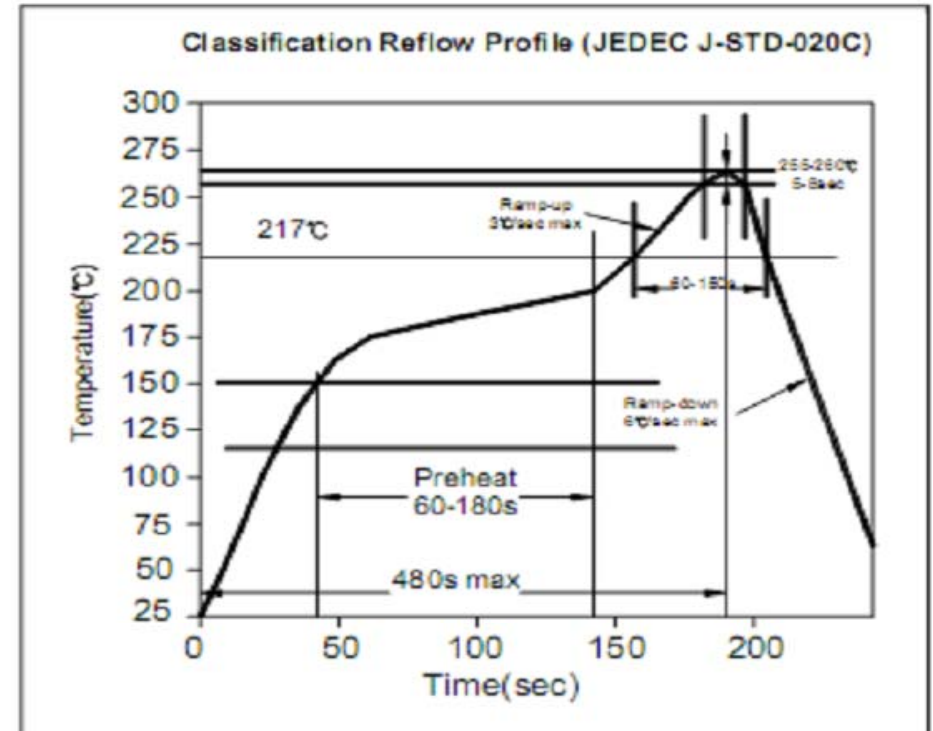

MICRO FIT CONNECTOR 3,00mm	
Part No.:	T48022
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	26.03.2021
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	

www.edcon-components.com

email: info@edcon-components.com