

EDCON-COMPONENTS






Specifications

Voltage Rating: 50VAC / DC
 Current Rating: 0,5AC / DC
 Operating Temperature: -25°C ~ +85°C
 Contact Resistance: 30m Ω Max.
 Withstanding Voltage: 500V AC/minute
 Insulation Resistance: 100M Ω Min.

 Material Insulator: Polyester UL94V-0

Drawing (dimensions all into mm)

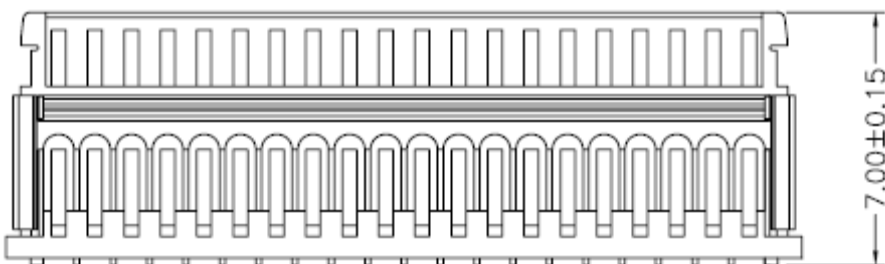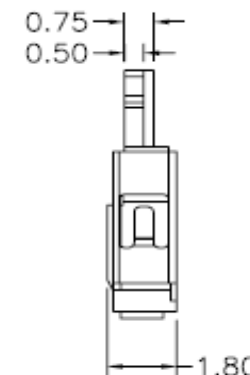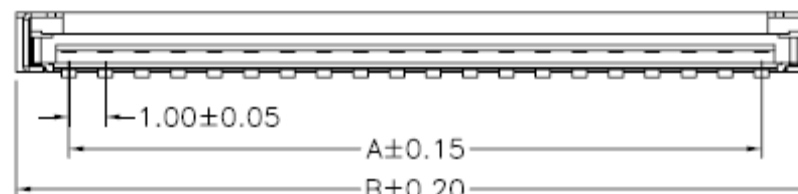

**Wire to Board Serie Pitch
1,00mm**

Part No.: **T68L010**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

EDCON-COMPONENTS



Ordering Informations

Serie	Positions	Body Color	ROHS	Packing						
T68L010	14	WH	R	BU						

Look Table 1	BK= Black	R= ROHS Conform	BU= Bulk (Standard)
	WH= White	N= NON ROHS Conform	
	BL= Blue		
	BG= Beige		

Wire to Board Serie Pitch 1,00mm	
Part No.:	T68L010
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	