

EDCON-COMPONENTS




Specifications



Voltage Rating: 150VAC /DC
 Current Rating 0,5AC / DC
 Operating Temperature . -40°C ~ +105°C
 Contact Resistance 20m Ω Max.
 Withstanding Voltage 250V AC/minute
 Insulation Resistance 100M Ω Min.

Material Insulator: PA46 (UL94V-0)
 Material Pin Brass
 Pin Plating: AU or SN over NI
 9 pin to 15pin without D

Drawing (dimensions all into mm)

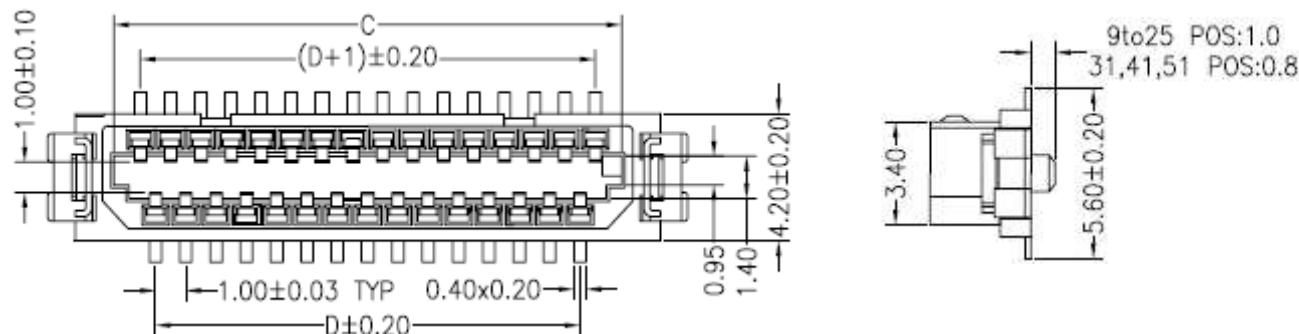

PCB Layout

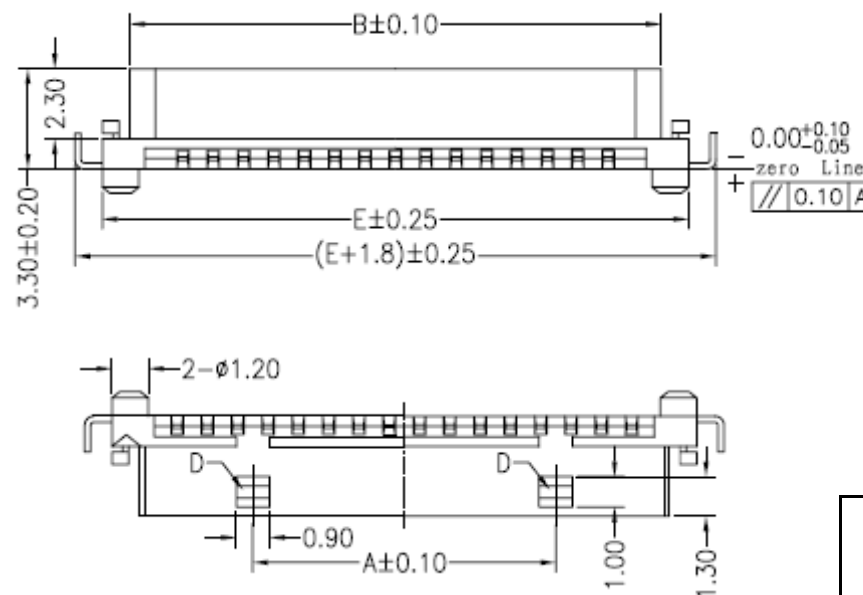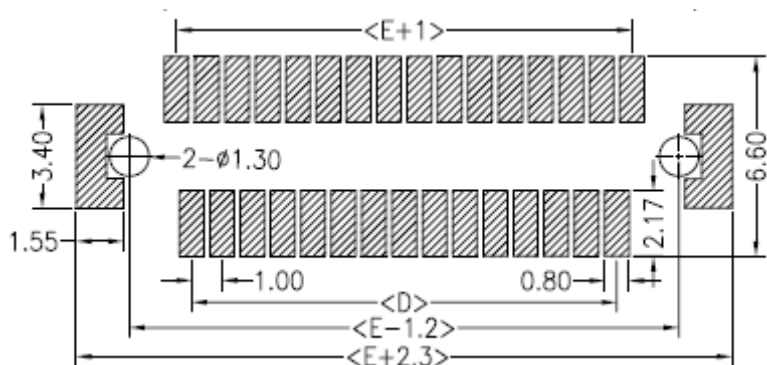


**Wire to Board Serie Pitch
1,00mm**

Part No.: **T68L015**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4

Customer:

EDCON-COMPONENTS



Ordering Informations

Serie	Positions	Body Color	C- Plating	ROHS	Packing				
T68L015	09	BG	TN	R	TU				

Look Table 1	BG= Beige	TN= Tin Plated	R= ROHS Conform	TU= Bulk (Standard)
	WH= White	GF= Gold Flash	N= NON ROHS Conform	TR= Tape Reel
		GA= 3 μ Gold		
		GB= 5 μ Gold		
		GC= 10 μ Gold		
		GD= 15 μ Gold		
		GE= 30 μ Gold		
		SA= Sel. 3 μ Gold		
		SB= Sel. 5 μ Gold		
		SC= Sel. 10 μ Gold		
	SD= Sel. 15 μ Gold	SE= Sel. 30 μ Gold		

Wire to Board Serie Pitch 1,00mm	
Part No.:	T68L015
Customer:	


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile

Lead Free Curve

Classification Reflow Profile (JEDEC J-STD-020C)

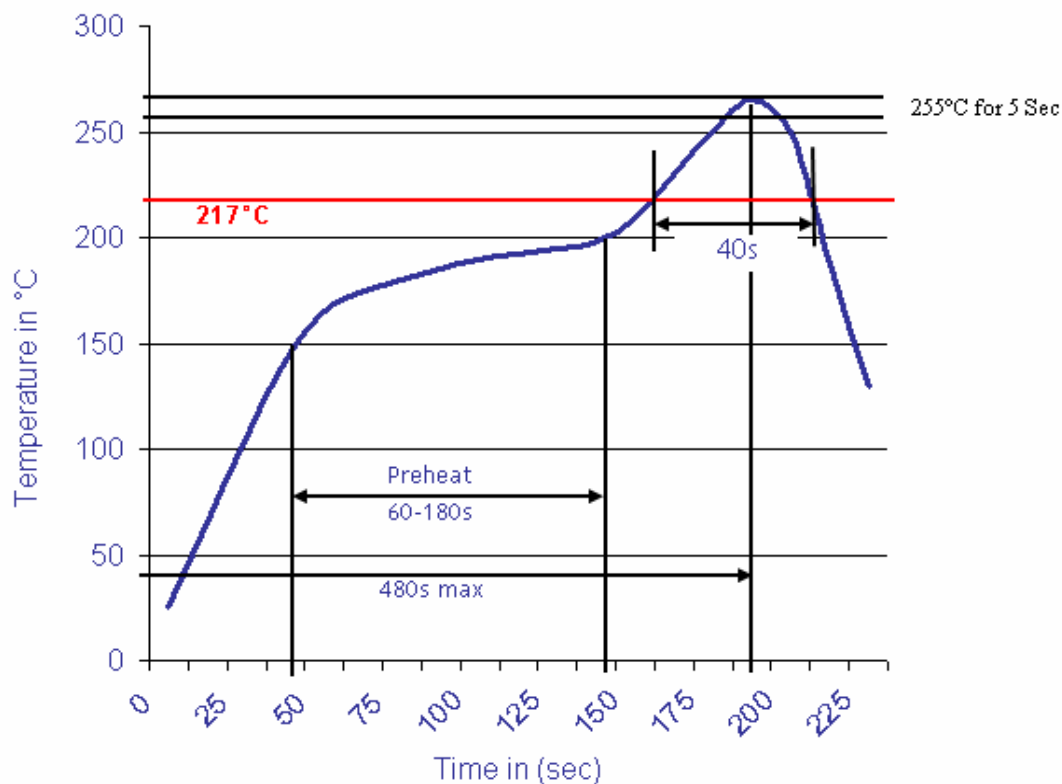

Wire to Board Serie Pitch 1,00mm	
Part No.:	T68L015
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	