


EDCON-COMPONENTS




Specifications



Voltage Rating: 50VAC / DC
 Current Rating: 1AC / DC
 Operating Temperature: -25°C ~ +85°C
 Contact Resistance: 20m Ω Max.
 Withstanding Voltage: 500V AC/minute
 Insulation Resistance: 100M Ω Min.

Material Insulator: High Temperature Plastic UL94V-0
 Material Pin: Brass
 Pin Plating: AU or SN over NI

Drawing (dimensions all into mm)

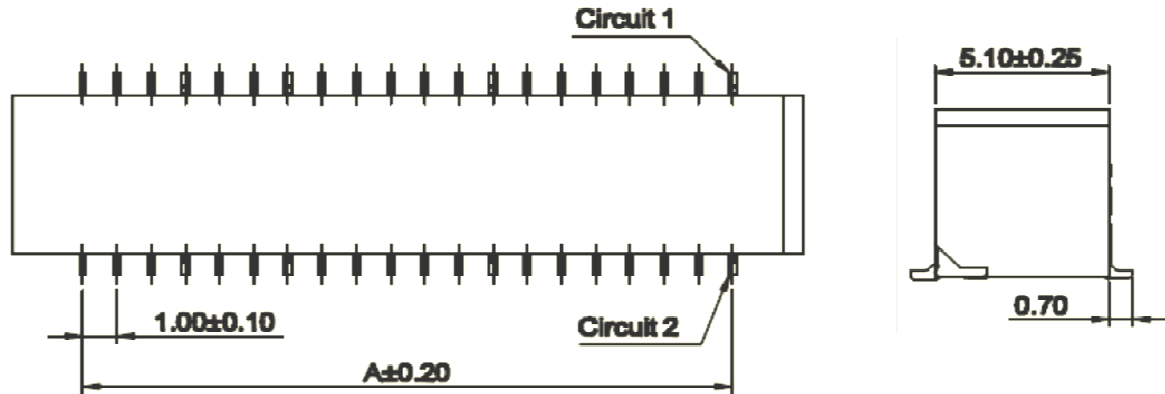

PCB Layout

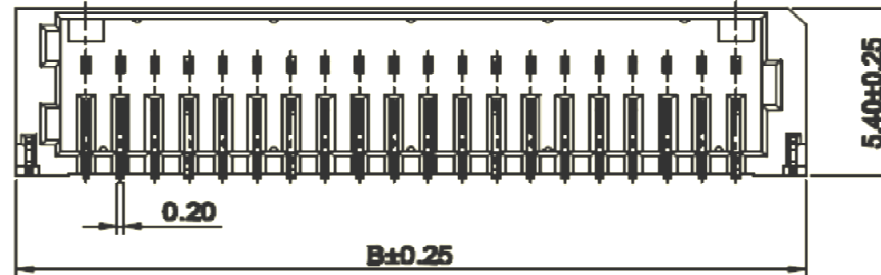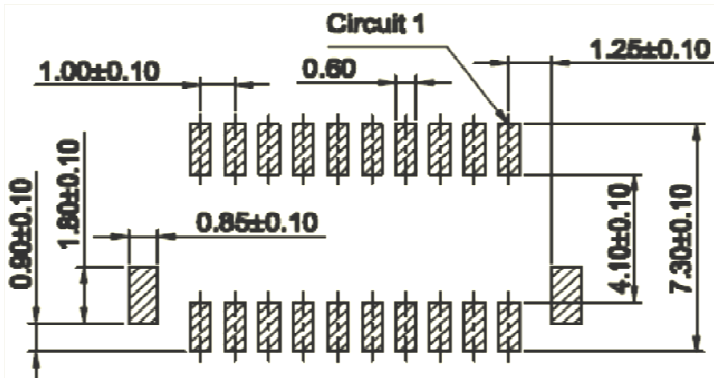

Wire to Board Serie Pitch
1,00mm

Part No.: T68L021-


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.03.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4

Customer:

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Positions	Body Color	Post	C- Plating	ROHS	Packing				
T68L021-	10	BG	1	TN	R	TU				

Look Table 1		1= Type 1 w/o Post	TN= Tin Plated	R= ROHS Conform	TU= Bulk (Standard)
	WH= White	2= Type 2 with Post	GF= Gold Flash	N= NON ROHS Conform	TR= Tape Reel
			GA= 3µGold		
			GB= 5µGold		
			GC= 10µGold		
			GD= 15µGold		
			GE= 30µGold		
			SA= Sel. 3µGold		
			SB= Sel. 5µGold		
			SC= Sel. 10µGold		
		SD= Sel. 15µGold	SE= Sel. 30µGold		

Wire to Board Serie Pitch 1,00mm
Part No.: T68L021-
Customer:


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.03.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile

Lead Free Curve

Classification Reflow Profile (JEDEC J-STD-020C)

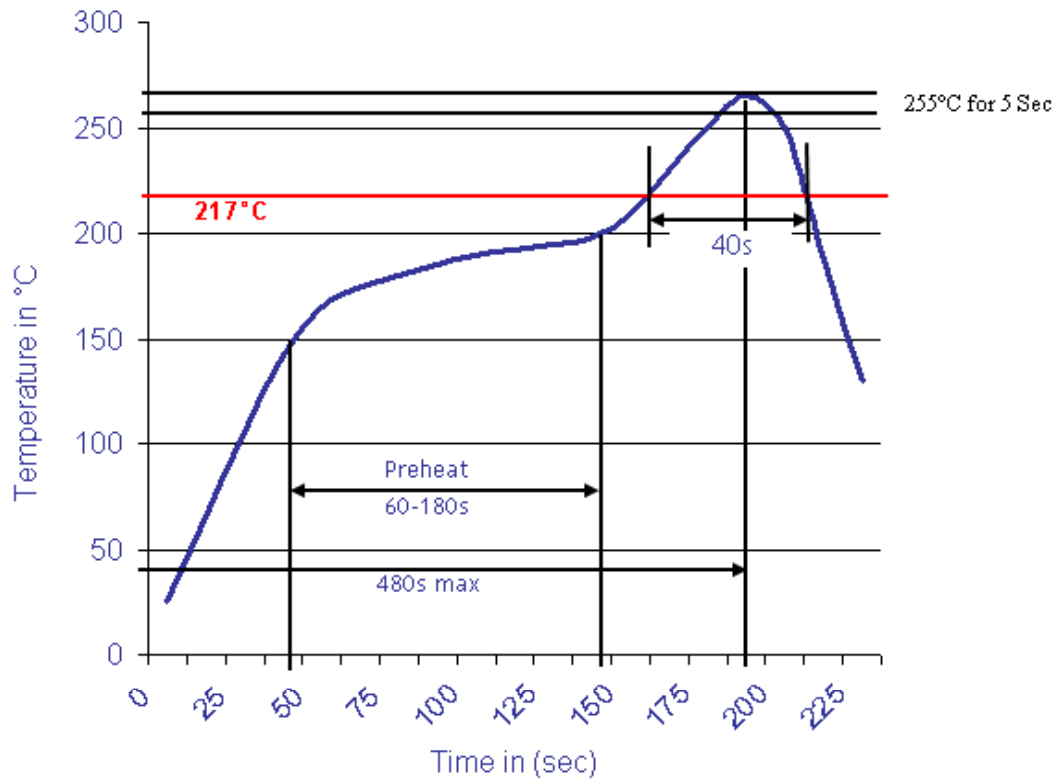

Wire to Board Serie Pitch 1,00mm	
Part No.:	T68L021-
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.03.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	