





EDCON-COMPONENTS



Specifications

Voltage Rating:	50VAC /DC
Current Rating	1AC / DC
Operating Temperature	. -25°C ~ +85°C
Contact Resistance	20m Ω Max.
Withstanding Voltage	500V AC/minute
Insulation Resistance	100M Ω Min.
 Material Insulator:	 PBT (UL94V-0)

Drawing (dimensions all into mm)

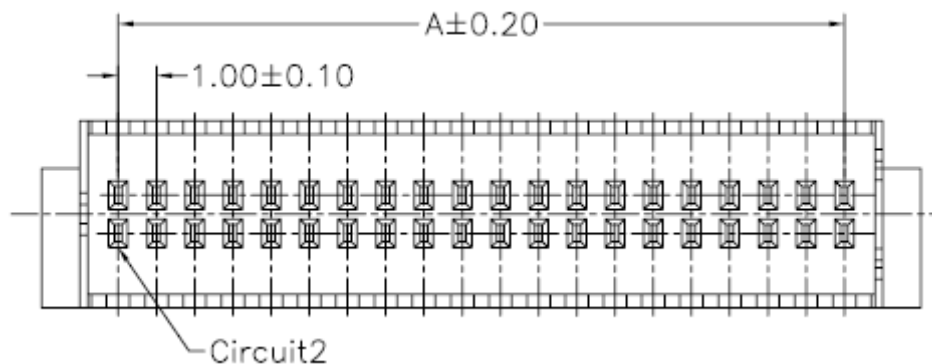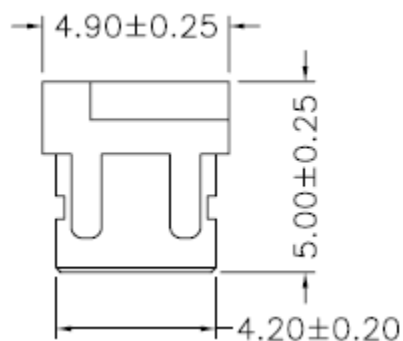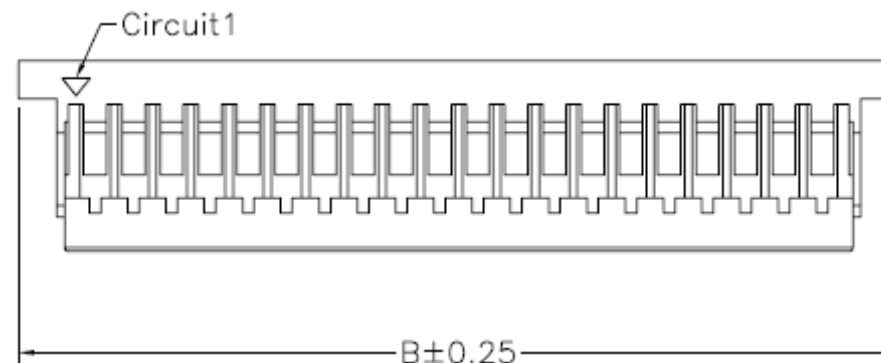


**Wire to Board Serie Pitch
1,00mm**

Part No.: **T68L022**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

EDCON-COMPONENTS



Ordering Informations

Serie	Positions	Body Color	ROHS	Packing						
T68L022	14	WH	R	BU						

Look Table 1	BK= Black	R= ROHS Conform	BU= Bulk (Standard)
	WH= White	N= NON ROHS Conform	
	BL= Blue		
	BG= Beige		

Wire to Board Serie Pitch 1,00mm	
Part No.:	T68L022
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	