





# EDCON-COMPONENTS



## Specifications

Voltage Rating:	50VAC /DC
Current Rating	1AC / DC
Operating Temperature	. -40°C ~ +105°C
Contact Resistance	20m Ω Max.
Withstanding Voltage	500V AC/minute
Insulation Resistance	100M Ω Min.
Material Insulator:	PBT UL94V-0


## Drawing ( dimensions all into mm)

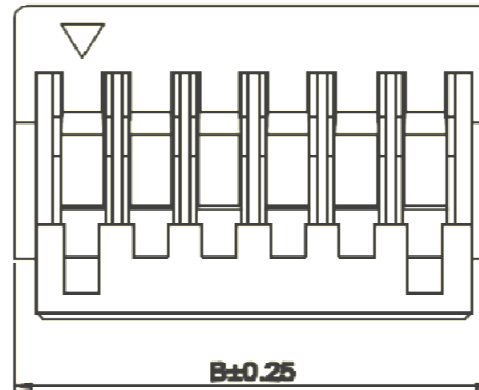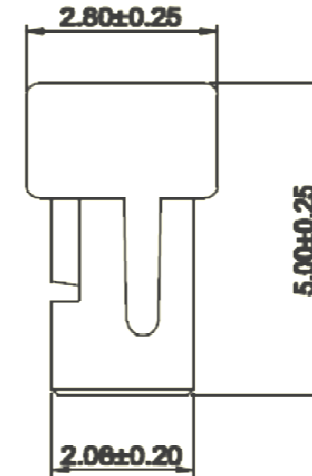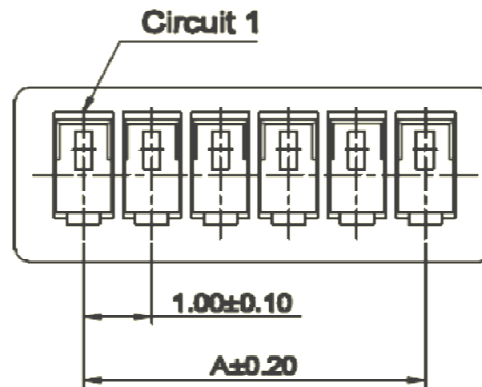

<b>Wire to Board Serie Pitch 1,00mm</b>	
Part No.:	<b>T68L036-</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.03.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

# EDCON-COMPONENTS




## Dimension Informations about Housing

Table 1	Dimension (mm)					
Pos.	A	B	C	D	E	F
02	1,00	3,00				
03	2,00	4,00				
04	3,00	5,00				
05	4,00	6,00				
06	5,00	7,00				
07	6,00	8,00				
08	7,00	9,00				
09	8,00	10,00				
10	9,00	11,00				
11	10,00	12,00				
12	11,00	13,00				
13	12,00	14,00				
14	13,00	15,00				
15	14,00	16,00				
16	15,00	17,00				
17	16,00	18,00				
18	17,00	19,00				
19	18,00	20,00				
20	19,00	21,00				

<b>Wire to Board Serie Pitch 1,00mm</b>	
Part No.:	<b>T68L036-</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.03.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

# EDCON-COMPONENTS



## Ordering Informations

Serie	Positions	Body Color	ROHS	Packing						
<b>T68L036-</b>	<b>02</b>	<b>WH</b>	<b>R</b>	<b>BU</b>						

Look Table 1		<b>R=</b> ROHS Conform	<b>BU=</b> Bulk (Standard)
	<b>WH=</b> White	<b>N=</b> NON ROHS Conform	

<b>Wire to Board Serie Pitch 1,00mm</b>
Part No.: <b>T68L036-</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.03.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	