


EDCON-COMPONENTS




Specifications

Voltage Rating: 50VAC /DC
 Current Rating 1AC / DC
 Operating Temperature . -40°C ~ +105°C
 Contact Resistance 20m Ω Max.
 Withstanding Voltage 500V AC/minute
 Insulation Resistance 100M Ω Min.

Material Insulator: PBT UL94V-0

Drawing (dimensions all into mm)

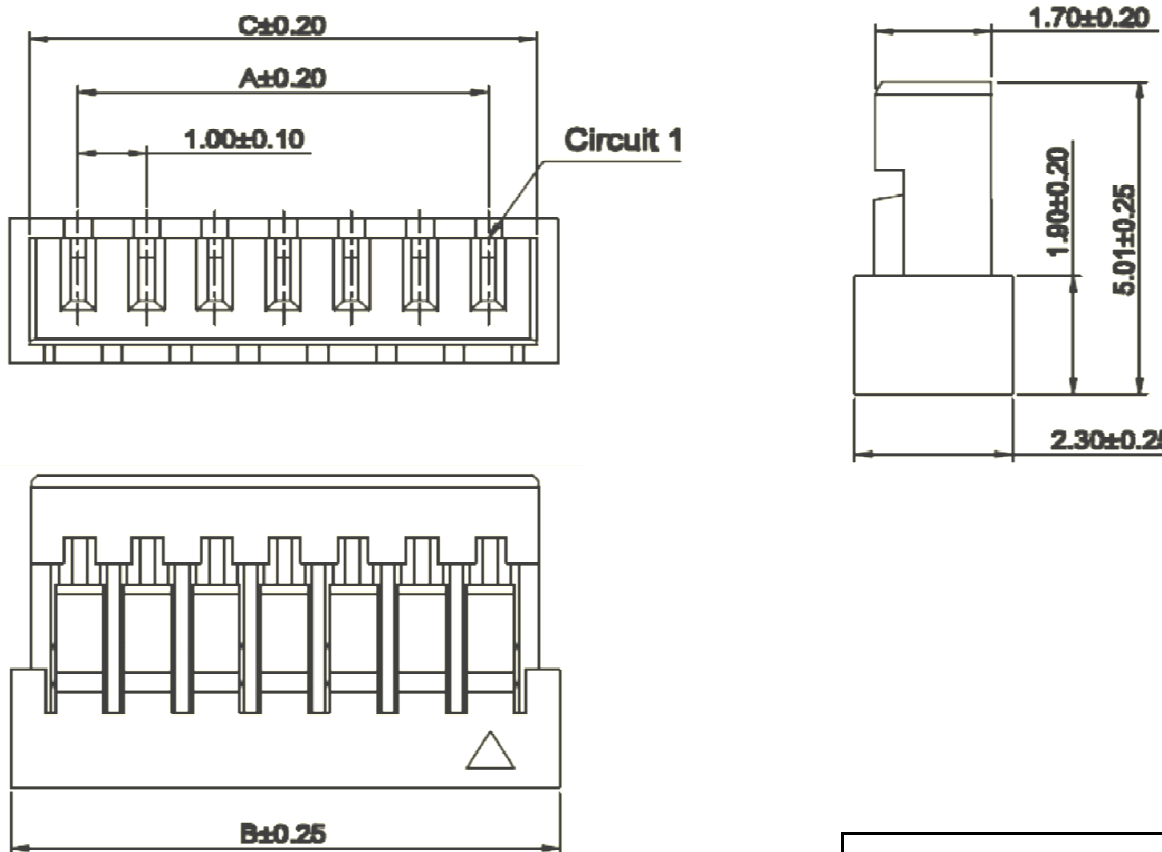


Wire to Board Serie Pitch 1,00mm	
Part No.:	T68L037-
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.03.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS




Dimension Informations about Housing

Table 1	Dimension (mm)					
Pos.	A	B	C	D	E	F
02	1,00	3,00	2,40			
03	2,00	4,00	3,40			
04	3,00	5,00	4,40			
05	4,00	6,00	5,40			
06	5,00	7,00	6,40			
07	6,00	8,00	7,40			
08	7,00	9,00	8,40			
09	8,00	10,00	9,40			
10	9,00	11,00	10,40			
11	10,00	12,00	11,40			
12	11,00	13,00	12,40			
13	12,00	14,00	13,40			
14	13,00	15,00	14,40			
15	14,00	16,00	15,40			
16	15,00	17,00	16,40			
17	16,00	18,00	17,40			
18	17,00	19,00	18,40			
19	18,00	20,00	19,40			
20	19,00	21,00	20,40			

Wire to Board Serie Pitch 1,00mm	
Part No.:	T68L037-
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.03.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

EDCON-COMPONENTS



Ordering Informations

Serie	Positions	Body Color	ROHS	Packing						
T68L037-	02	WH	R	BU						

Look Table 1		R= ROHS Conform	BU= Bulk (Standard)
	WH= White	N= NON ROHS Conform	

Wire to Board Serie Pitch 1,00mm
Part No.: T68L037-
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.03.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	