



EDCON-COMPONENTS



Specifications

Voltage Rating:	50VAC /DC
Current Rating	1AC / DC
Operating Temperature	. -40°C ~ +105°C
Contact Resistance	20m Ω Max.
Withstanding Voltage	500V AC/minute
Insulation Resistance	100M Ω Min.
Material Insulator:	PBT UL94V-0


Drawing (dimensions all into mm)

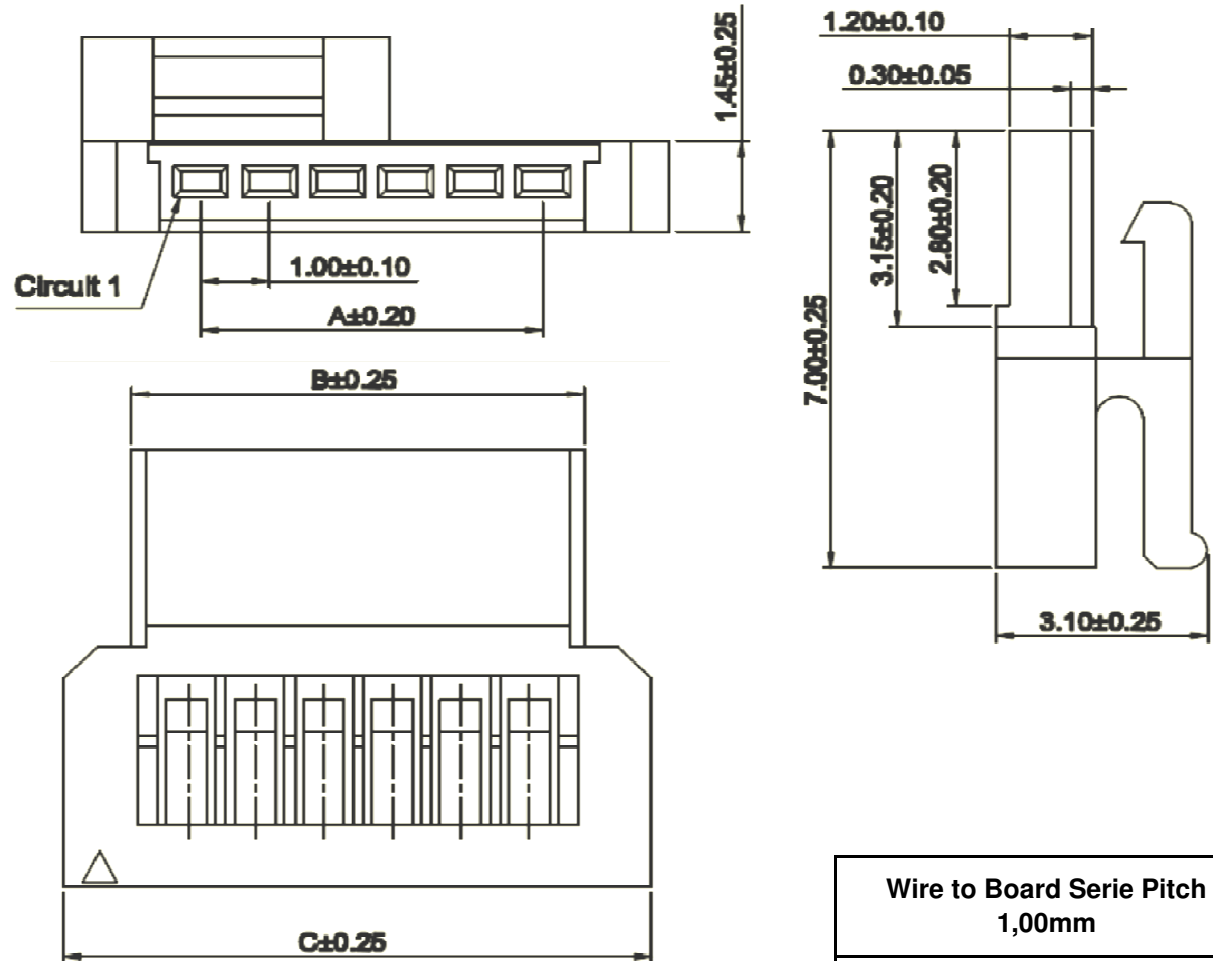

Wire to Board Serie Pitch 1,00mm
Part No.: T68L040-
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.03.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

EDCON-COMPONENTS




Dimension Informations about Housing

Table 1	Dimension (mm)					
Pos.	A	B	C	D	E	F
04	3,00	4,60	6,60			
06	5,00	6,60	8,60			

Wire to Board Serie Pitch 1,00mm
Part No.: T68L040-
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.03.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

EDCON-COMPONENTS



Ordering Informations

Serie	Positions	Body Color	ROHS	Packing						
T68L040-	04	WH	R	BU						

Look Table 1		R= ROHS Conform	BU= Bulk (Standard)
	WH= White	N= NON ROHS Conform	

Wire to Board Serie Pitch 1,00mm
Part No.: T68L040-
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	15.03.2022
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	