


EDCON-COMPONENTS



Specifications



Voltage Rating: 250VAC /DC
 Current Rating: 3AC / DC
 Operating Temperature: -40°C ~ +105°C
 Contact Resistance: 20m Ω Max.
 Withstanding Voltage: 1000V AC/minute
 Insulation Resistance: 1000M Ω Min.

Material Insulator: PBT + 30% GF. UL94V-0
 Material Pin: Brass
 Pin Plating: AU or SN over NI


PCB Layout



Drawing (dimensions all into mm)

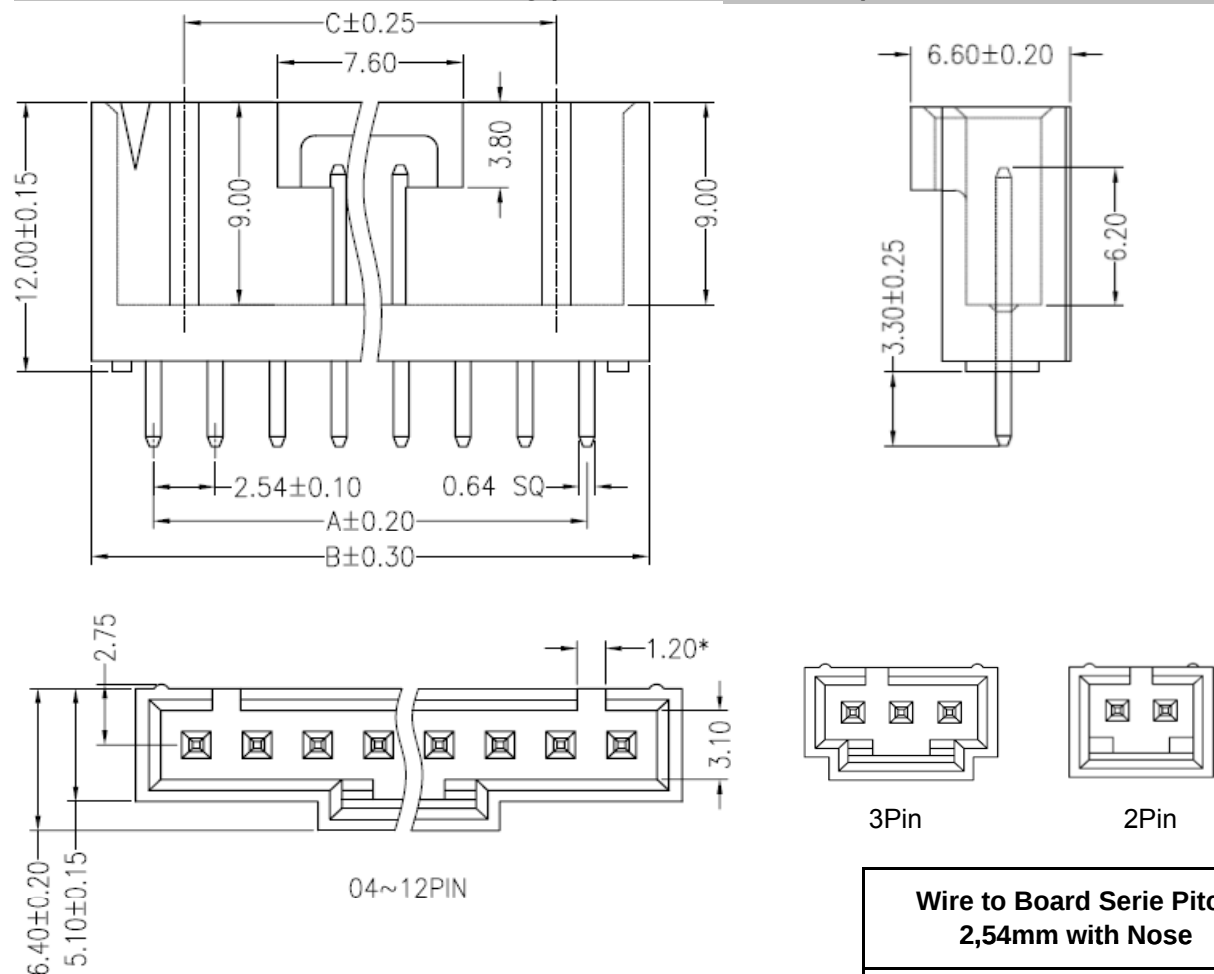

3Pin



2Pin

**Wire to Board Serie Pitch
2,54mm with Nose**

Part No.: **T68N006**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	05.02.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	



EDCON  [®]
COMPONENTS
A MEMBER OF EDCON-GROUP


[illegible][illegible]

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	05.02.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Positions	Body Color	C- Plating	ROHS	Packing					
T68N006	02	BK	TN	R	BU					


Look Table	BK= Black	TN= Tin Plated	R= ROHS Conform	BU= Bulk (Standard)
	WH= White	GF= Gold Flash 0,75~1,0μAU	N= NON ROHS Conform	
	BL= Blue	GA= 3μGold		
	BG= Beige	GB= 5μGold		
		GC= 10μGold		
		GD= 15μGold		
		GE= 30μGold		
		SA= Sel. 3μGold		
		SB= Sel. 5μGold	SE= Sel. 30μGold	
		SC= Sel. 10μGold	SD= Sel. 15μGold	

**Wire to Board Serie Pitch
2,54mm with Nose**

Part No.: **T68N006**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	05.02.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4


Customer:



Soldering Profile

Lead Free Curve

Classification Reflow Profile (JEDEC J-STD-020C)

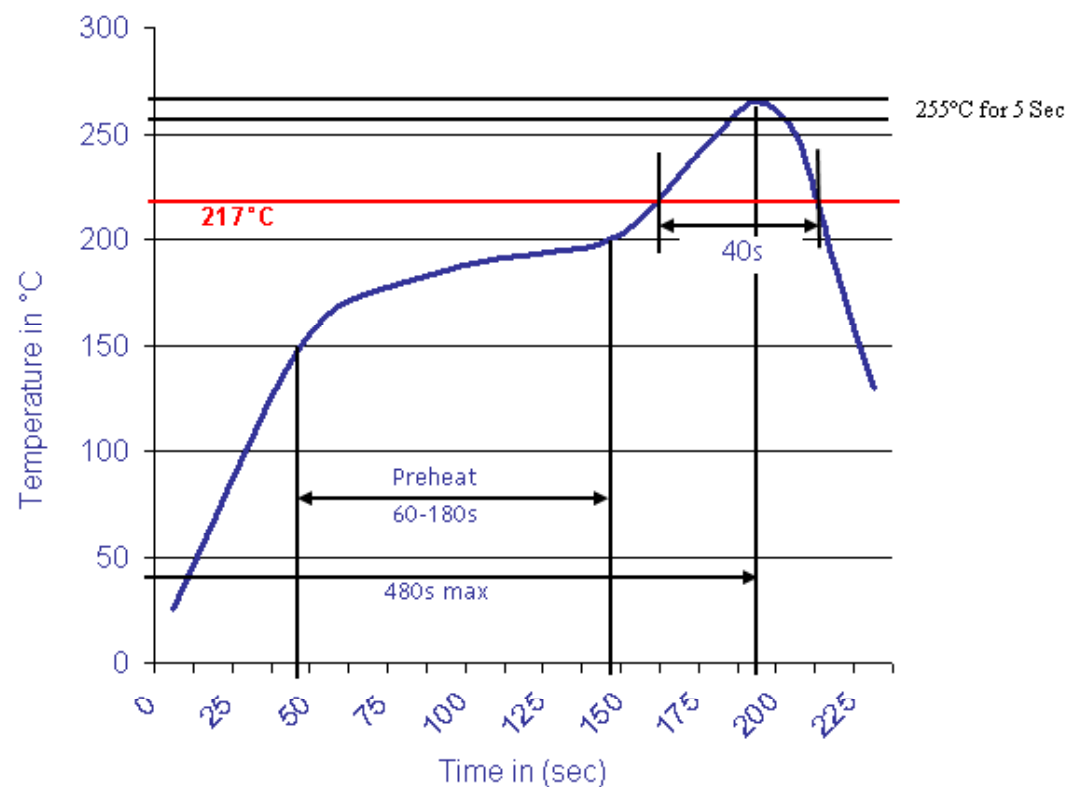

**Wire to Board Serie Pitch
2,54mm with Nose**

Part No.: **T68N006**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	05.02.2018
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	

Customer: