



EDCON-COMPONENTS





Specifications

Voltage Rating:	250VAC /DC
Current Rating	3AC / DC
Operating Temperature	-40°C ~ +105°C
Contact Resistance	20m Ω Max.
Withstanding Voltage	1000V AC/minute
Insulation Resistance	1000M Ω Min.
Material Insulator:	PBT + 30% GF. UL94V-0
Material Pin	Brass
Pin Plating:	AU or SN over NI


Drawing (dimensions all into mm)

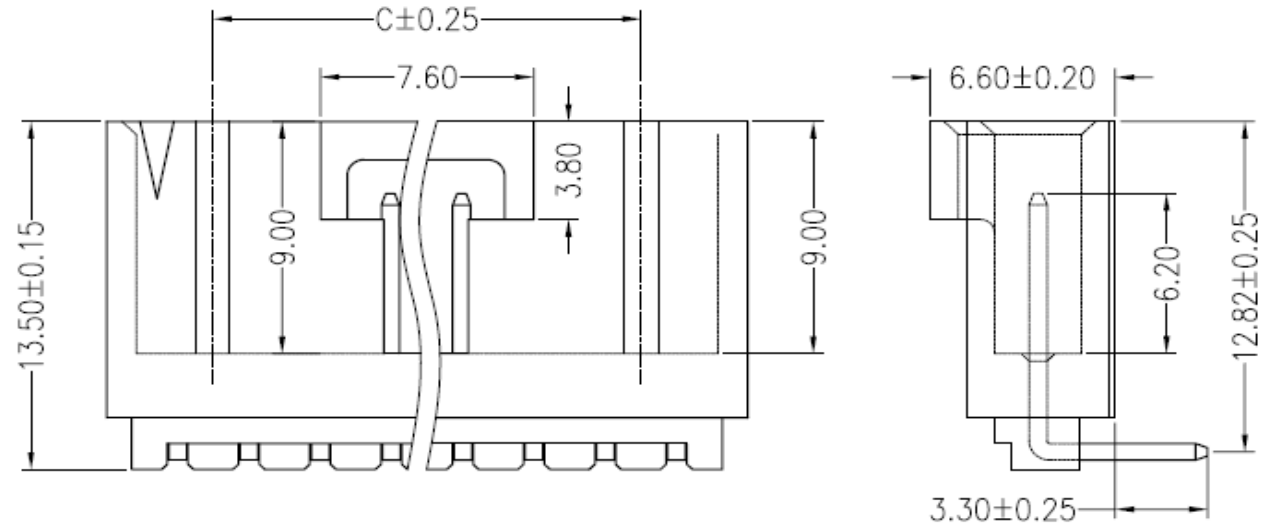

PCB Layout

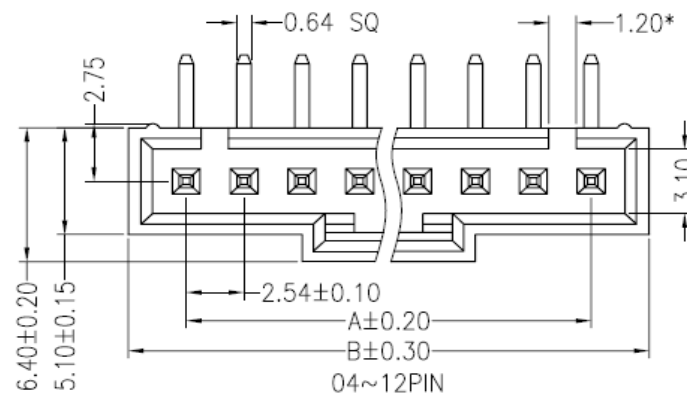

3Pin



2Pin

**Wire to Board Serie Pitch
2,54mm with Nose**

Part No.: **T68N008**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4


www.edcon-components.com

email: info@edcon-components.com

[illegible][illegible]

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

EDCON-COMPONENTS



Ordering Informations

Serie	Positions	Body Color	C- Plating	ROHS	Packing					
T68N008	02	BK	TN	R	BU					


Look Table	BK= Black	TN= Tin Plated	R= ROHS Conform	BU= Bulk (Standard)
	WH= White	GF= Gold Flash	N= NON ROHS Conform	
	BL= Blue	GA= 3µGold		
	BG= Beige	GB= 5µGold		
		GC= 10µGold		
		GD= 15µGold		
		GE= 30µGold		
		SA= Sel. 3µGold		
		SB= Sel. 5µGold		
		SC= Sel. 10µGold		
		SD= Sel. 15µGold	SE= Sel. 30µGold	

**Wire to Board Serie Pitch
2,54mm with Nose**

Part No.: **T68N008**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 4	


Customer:



Soldering Profile

Lead Free Curve

Classification Reflow Profile (JEDEC J-STD-020C)

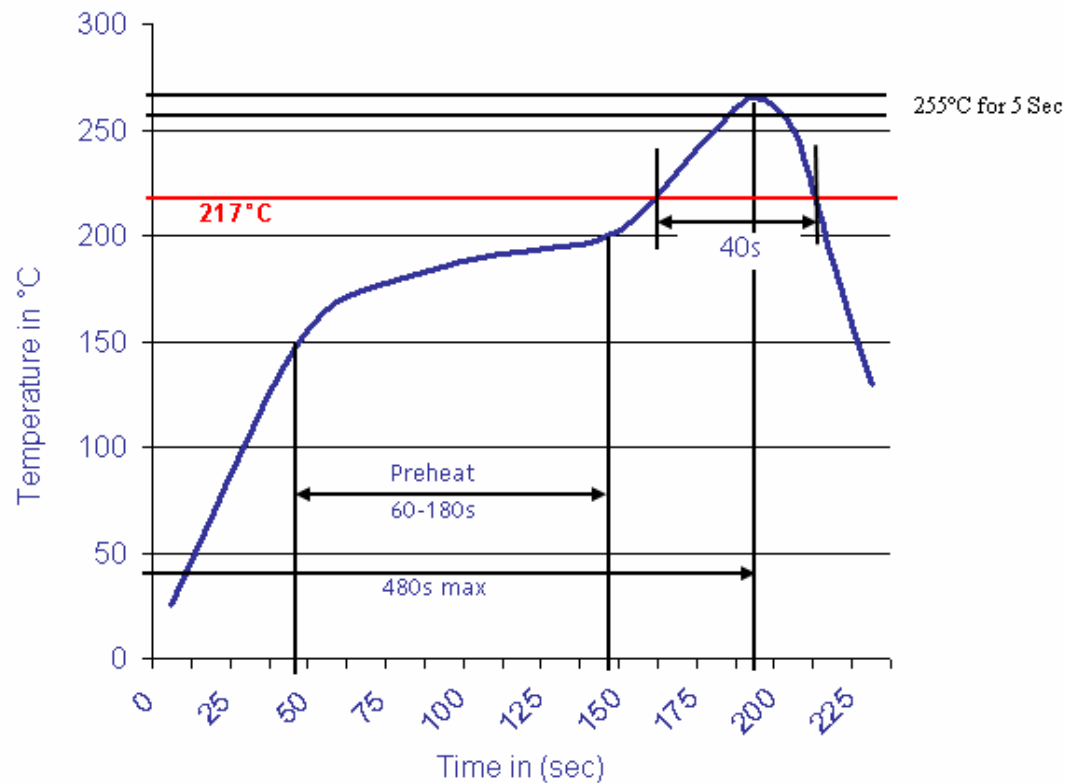
**Wire to Board Serie Pitch
2,54mm with Nose**

 Part No.: **T68N008**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4		