





# EDCON-COMPONENTS



## Specifications

Voltage Rating:	250VAC /DC
Current Rating	3A AC / DC
Operating Temperature	. -25°C ~ +95°C
Contact Resistance	20m Ω Max.
Withstanding Voltage	800V AC/minute
Insulation Resistance	1000M Ω Min.
Material Insulator:	PA66 UL94V-0
withstanding Voltage:	1500V AC(Minute)
Insulation Resistance:	1000MΩ min.

## Drawing ( dimensions all into mm)

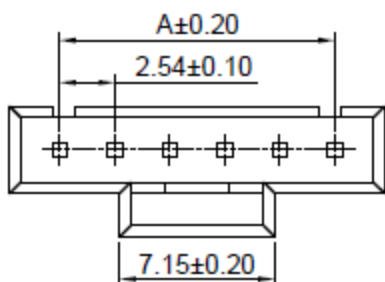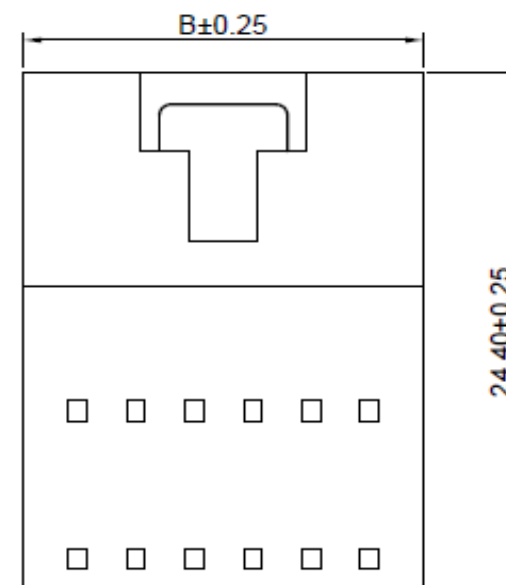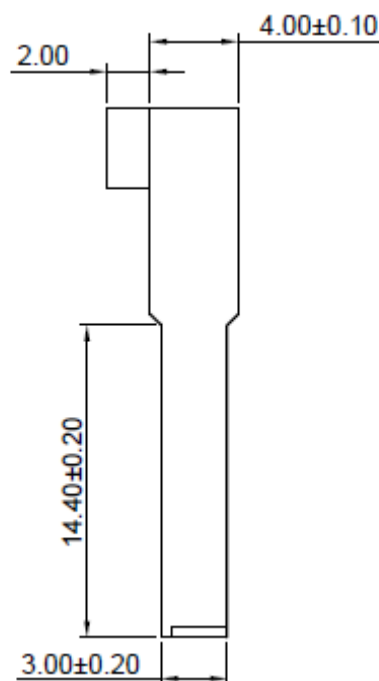


**Male Housing w. Nose for Wire  
to Board Serie Pitch 2,54mm**

Part No.: **T68N299 -**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.12.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	Customer:



# EDCON-COMPONENTS



## Ordering Informations

Serie	Positions	Body Color	ROHS	Packing						
<b>T68N299 -</b>	<b>02</b>	<b>BK</b>	<b>R</b>	<b>BU</b>						

Look Table	<b>BK=</b> Black	<b>R=</b> ROHS Conform	<b>BU=</b> Bulk (Standard)
	<b>WH=</b> White	<b>N=</b> NON ROHS Conform	
	<b>BL=</b> Blue		
	<b>BG=</b> Beige		

**Male Housing w. Nose for Wire to Board Serie Pitch 2,54mm**

Part No.: **T68N299 -**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	14.12.2015
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3

Customer: