


# EDCON-COMPONENTS





## Specifications

Voltage Rating: 250VAC /DC  
 Current Rating: 3AC / DC  
 Operating Temperature: -25°C ~ +85°C  
 Contact Resistance: 20m Ω Max.  
 Withstanding Voltage: 1000V AC/minute  
 Insulation Resistance: 1000M Ω Min.




Material Insulator: High Temperature Plastic UL94V-0  
 Material Pin: Brass  
 Pin Plating: AU or SN over NI

## Drawing ( dimensions all into mm)

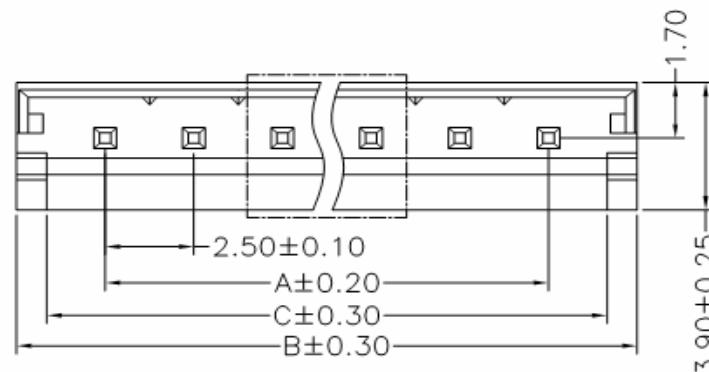

TYPE 2

## PCB Layout

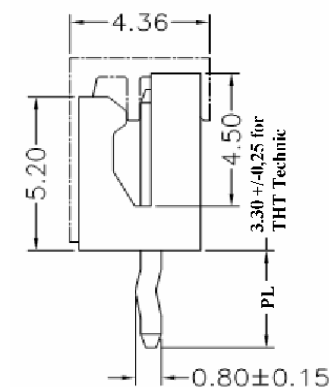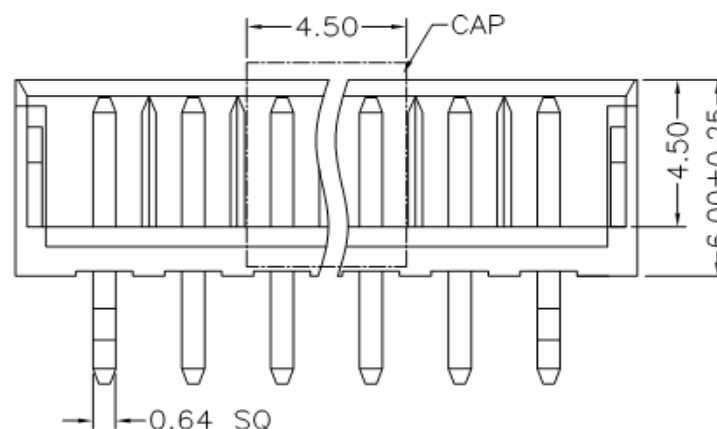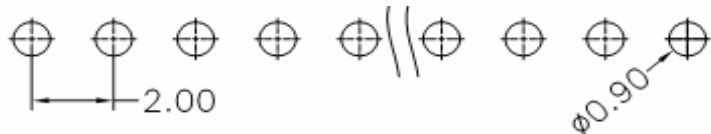

TYPE 1

**Wire to Board Serie Pitch  
2,50mm**


Part No.: **T68P012**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 4



# EDCON-COMPONENTS




## Ordering Informations

Serie	Positions	Body Color	C- Plating	PL Length	Pin Type	ROHS	Packing			
<b>T68P012</b>	<b>02</b>	<b>BG</b>	<b>TN</b>	<b>33</b>	<b>1</b>	<b>R</b>	<b>BU</b>			

Look Table	<b>BG=</b> Beige	<b>TN=</b> Tin Plated	<b>33=</b> 3,3mm f. THT Technic	<b>1=</b> Type 1 Kinked	<b>R=</b> ROHS Conform	<b>BU=</b> Bulk (Standard)
	<b>WH=</b> White	<b>GF=</b> Gold Flash				
				<b>17=</b> 1,7mm f. THR Technic		
			<b>14=</b> 1,4mm f. THR Technic			<b>TU=</b> Tube Packing
						<b>TC=</b> Tube w. Cap f. THR

<b>Wire to Board Serie Pitch 2,50mm</b>	
Part No.:	<b>T68P012</b>
Customer:	


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 4



Soldering Profile

Lead Free Curve

Classification Reflow Profile (JEDEC J-STD-020C)

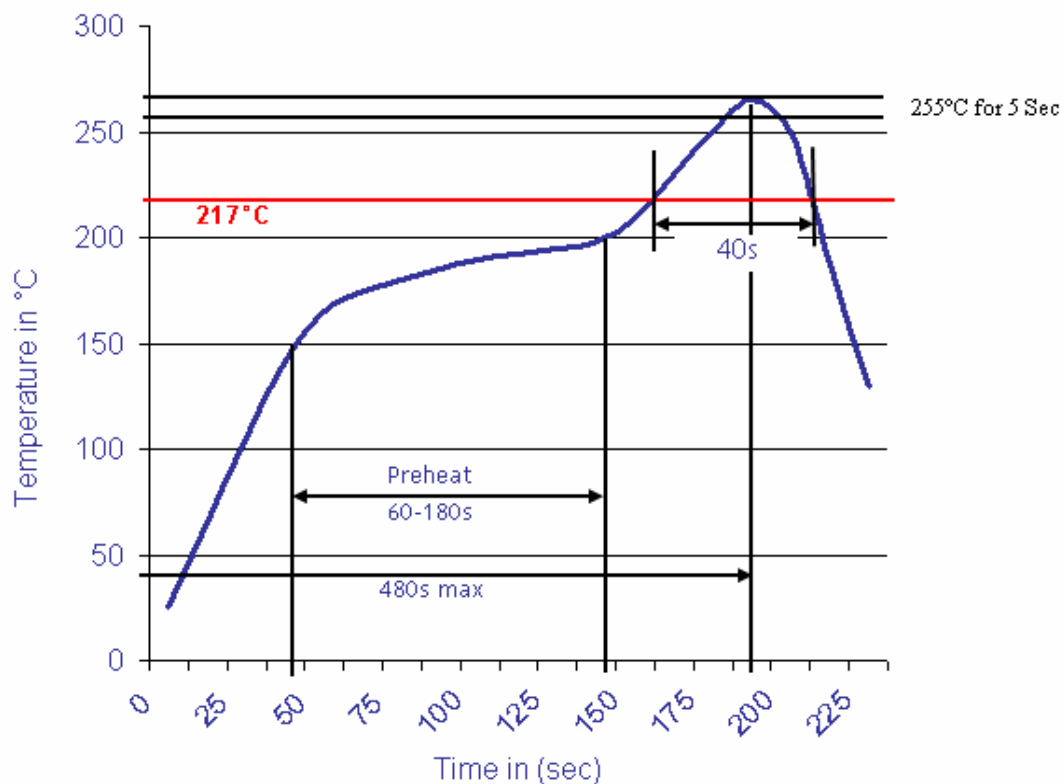

<b>Wire to Board Serie Pitch 2,50mm</b>	
Part No.:	<b>T68P012</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	4 from 4	