





EDCON-COMPONENTS



Specifications

Voltage Rating:	250V AC/DC
Current Rating:	5,0A
Operating Temperature:	-.25°C ~ 85°C
Contact Resistance:	10milli Ohm max.
Withstanding Voltage:	1500VAC / minute
Insulation Resistance:	1000M ohm min.
Applicable Wire:	
Applicable P.C.B:	
Applicable FPC/FFC:	
Solder Height:	
Crimp Tensile Strength:	
Material Housing:	PA66 UL94V-0

Drawing (dimensions all into mm)

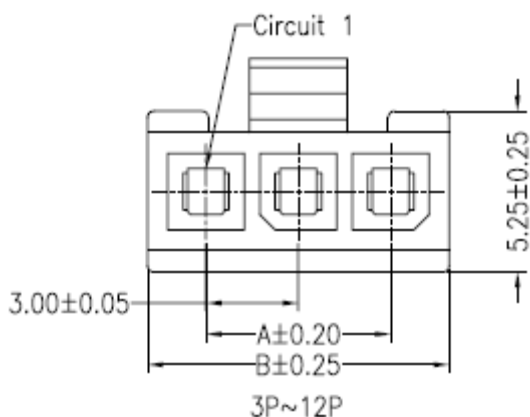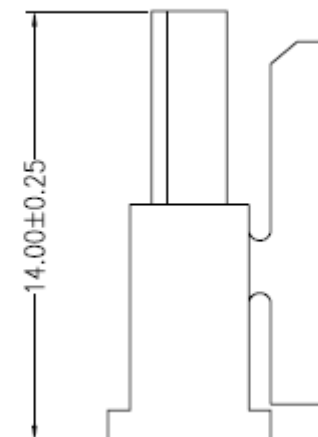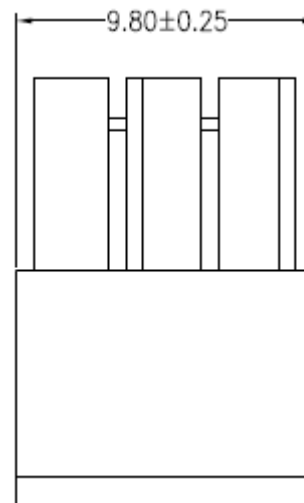

Housing Serie T68Qxxx Pitch 3,00mm	
Part No.:	T68Q001
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		1 from 3

EDCON-COMPONENTS



Ordering Informations

Serie	No. of Pos.	Color of Housing	Packing							
-------	-------------	------------------	---------	--	--	--	--	--	--	--

T68Q001	02	BK	BU							
----------------	-----------	-----------	-----------	--	--	--	--	--	--	--

02~ 12	BK= Black	BU= Bulk Packing								
	BG= Beige									
	WH= White									

Housing Serie T68Qxxx Pitch 3,00mm
Part No.: T68Q001
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3