





# EDCON-COMPONENTS



## Specifications

Voltage Rating:	250V AC/DC
Current Rating:	5,0A
Operating Temperature:	.-25°C ~ 85°C
Contact Resistance:	10milli Ohm max.
Withstanding Voltage:	1500VAC / minute
Insulation Resistance:	1000M ohm min.
Applicable Wire:	
Applicable P.C.B:	
Applicable FPC/FFC:	
Solder Height:	
Crimp Tensile Strength:	
Material Housing:	PA66 UL94V-0

## Drawing ( dimensions all into mm)

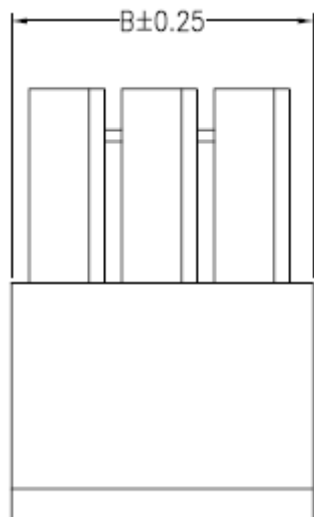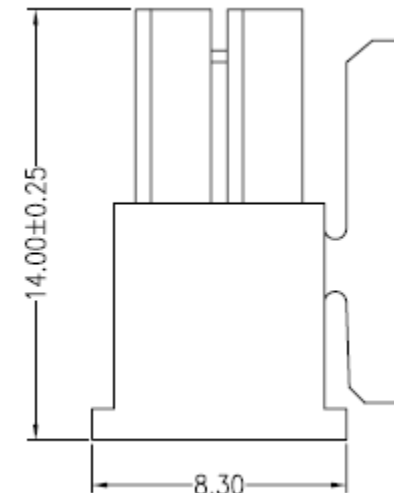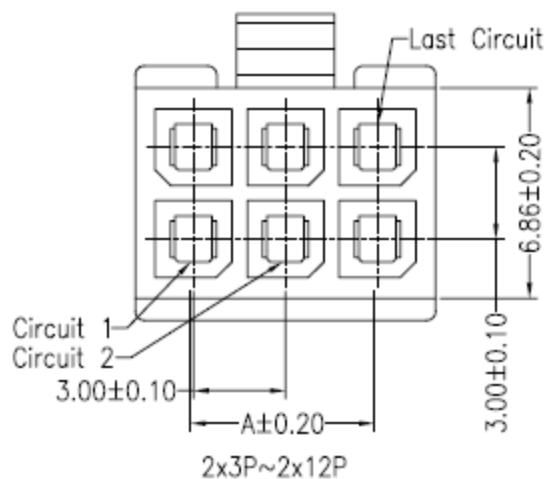

2x1P~2x2P

Housing Serie T68Qxxx Pitch 3,00mm	
Part No.:	<b>T68Q002</b>
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)

# EDCON-COMPONENTS



## Dimension Information about Housing


Pos.	Dimension (mm)					
	A	B	C	D	E	F
2		3,80				
4	3,00	6,80				
6	6,00	9,80				
8	9,00	12,80				
10	12,00	15,80				
12	15,00	18,80				
14	18,00	21,80				
16	21,00	24,80				
18	24,00	27,80				
20	27,00	30,80				
22	30,00	33,80				
24	33,00	36,80				

Pos.	Dimension (mm)					
	A	B	C	D	E	F

Housing Serie T68Qxxx Pitch 3,00mm
Part No.: <b>T68Q002</b>
Customer:

DRW: Jason	CHKD Wilson	MATL: Wilson	TOLERANCE Mason	DATE 02.04.2009
APPD: Schumi		FINISH Jamy	Sheet No.	2 from 3

# EDCON-COMPONENTS

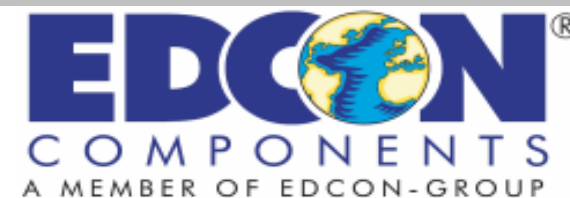

## Ordering Informations

Serie	No. of Pos.	Color of Housing	Packing							
-------	-------------	------------------	---------	--	--	--	--	--	--	--

<b>T68Q002</b>	<b>02</b>	<b>BK</b>	<b>BU</b>							
----------------	-----------	-----------	-----------	--	--	--	--	--	--	--

<b>02~ 12</b>	<b>BK= Black</b>	<b>BU= Bulk Packing</b>								
	<b>BG= Beige</b>									
	<b>WH= White</b>									

Housing Serie T68Qxxx Pitch 3,00mm
Part No.: <b>T68Q002</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		3 from 3