


EDCON-COMPONENTS




Specifications

Voltage Rating:	250VAC/DC
Current Rating	5,0A
Operating Temperature	-25°C ~ +85°C
Contact Resistance	10m Ohm max.
Withstanding Voltage	1500VAC/Minute
Insulation Resistance	1000M Ohm min.
Contact Material:	Brass
Contact Plating :	AU or Sn over Ni.
Insulator Material:	High Temperature Plastic UL94V-0

Terminal Assembly Drawing

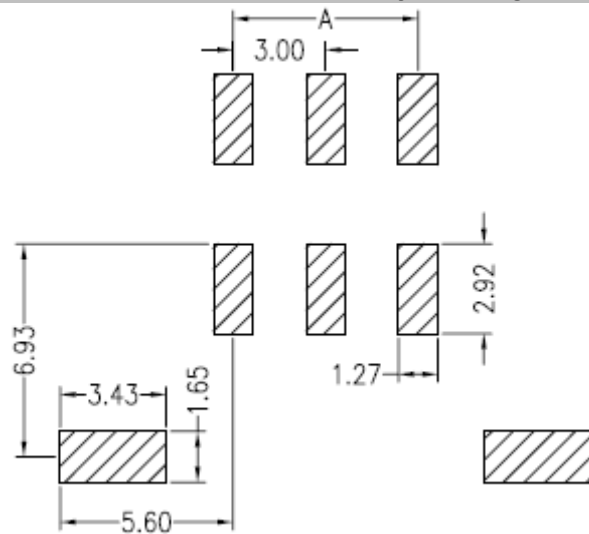

Drawing (dimensions all into mm)

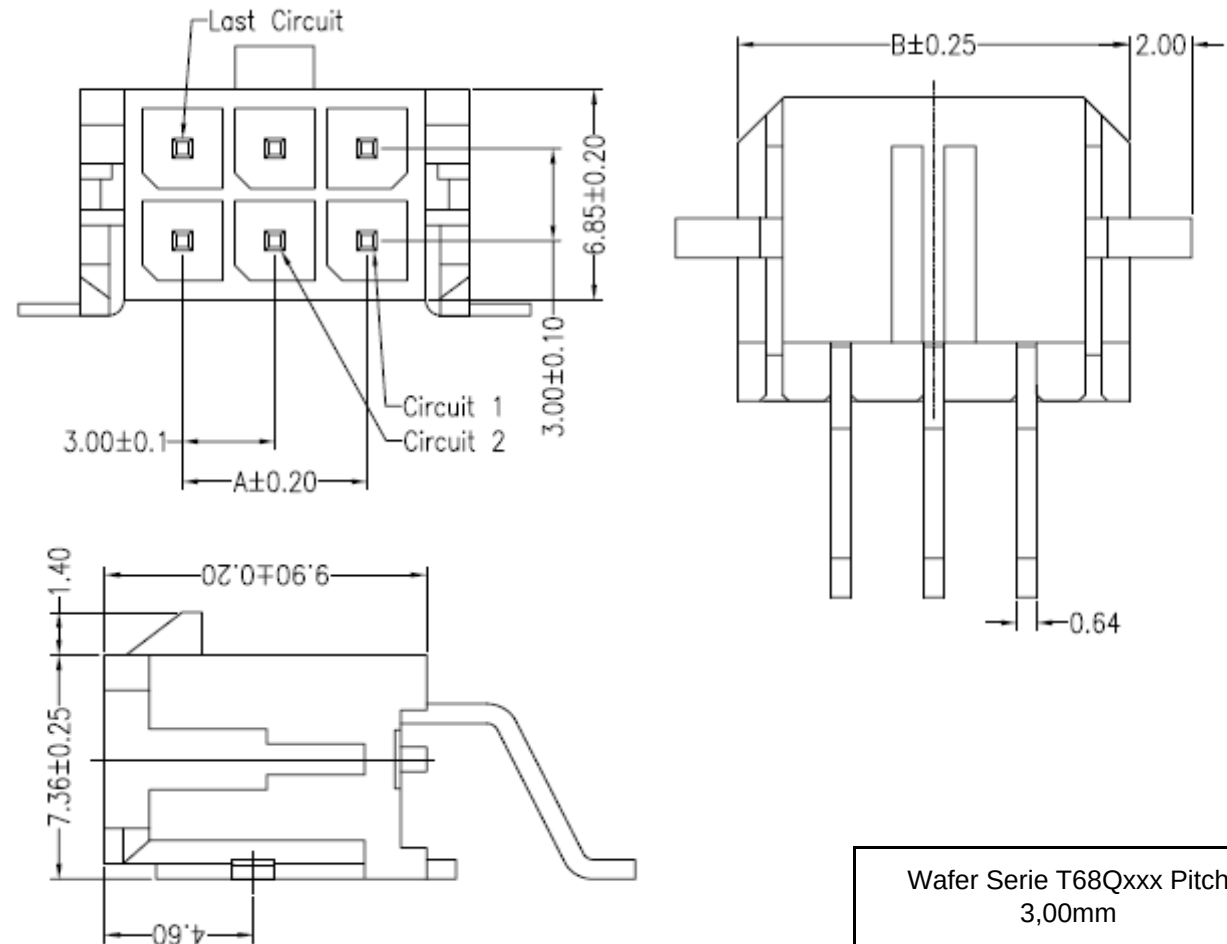

Wafer Serie T68Qxxx Pitch
3,00mm

Part No.: **T68Q013**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 4	

www.edcon-components.com

email: info@edcon-components.com

[illegible][illegible]


DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 4

www.edcon-components.com




Soldering Profile

Lead Solder

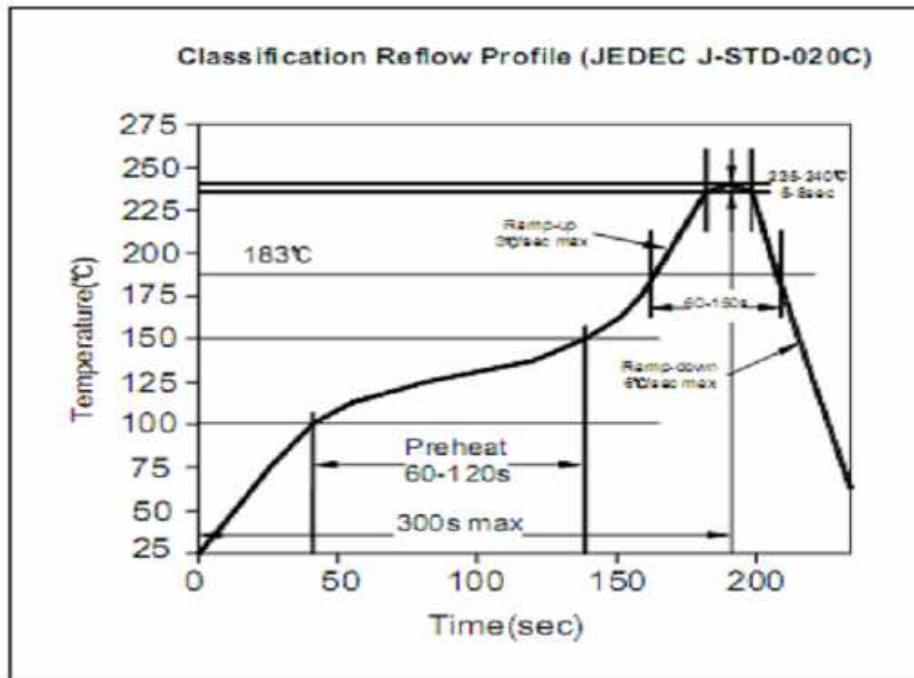

Lead Free Solder

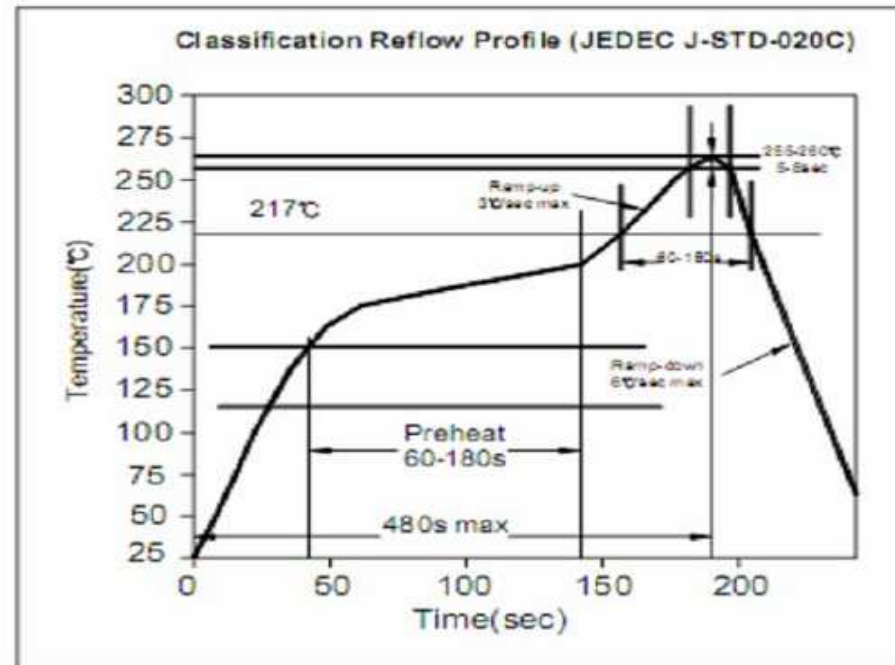
 Wafer Serie T68Qxxx Pitch
 3,00mm

 Part No.: **T68Q013**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 4	

 Customer:
 email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Number of	Contact	Packing							
-------	-----------	---------	---------	--	--	--	--	--	--	--

T68Q013	02	T	BU							
----------------	-----------	----------	-----------	--	--	--	--	--	--	--

xx = Pos.	T= Tin Plated (Standard)	BU= Bulk (Standard)							
		TY= Tray Packing							
	G= Gold Flash Plated	TU= Tube Packing							

Wafer Serie T68Qxxx Pitch
3,00mm

Part No.: **T68Q013**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.		4 from 4

Customer:
email: info@edcon-components.com

www.edcon-components.com