




# EDCON-COMPONENTS



## Specifications

Voltage Rating: 250V AC/DC  
 Current Rating: 5,0A  
 Operating Temperature: -25°C ~ 85°C  
 Contact Resistance: 10milli Ohm max.  
 Withstanding Voltage: 1500VAC / minute  
 Insulation Resistance: 1000M ohm min.  
 Applicable Wire:  
 Applicable P.C.B:  
 Applicable FPC/FFC:  
 Solder Height:  
 Crimp Tensile Strength:  
 Material Housing: PA66 UL94V-0

## Drawing ( dimensions all into mm)

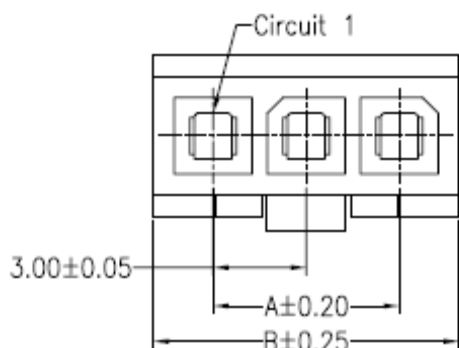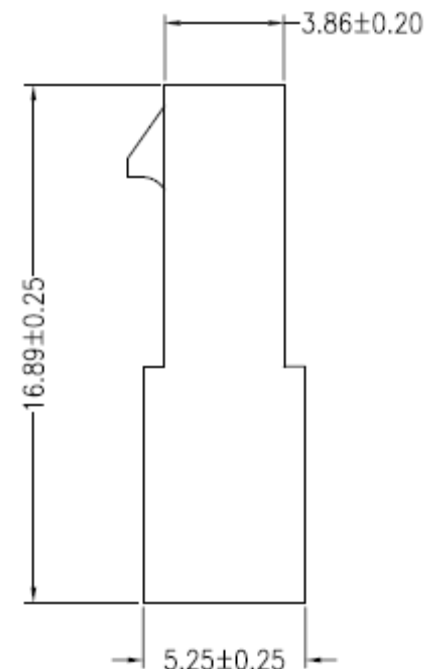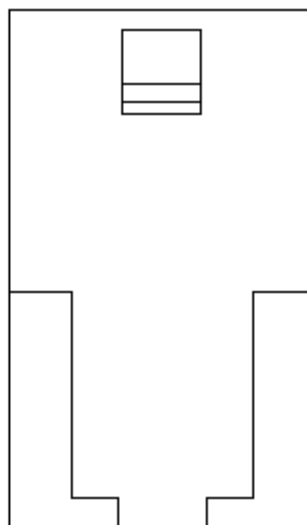

Housing Serie T68Qxxx Pitch 3,00mm

Part No.: **T68Q025**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

[www.edcon-components.com](http://www.edcon-components.com)

email: [info@edcon-components.com](mailto:info@edcon-components.com)



# EDCON-COMPONENTS



## Ordering Informations

Serie	No. of Pos.	Color of Housing	Packing							
-------	-------------	------------------	---------	--	--	--	--	--	--	--

<b>T68Q025</b>	<b>02</b>	<b>BK</b>	<b>BU</b>							
----------------	-----------	-----------	-----------	--	--	--	--	--	--	--

<b>02~ 12</b>	<b>BK= Black</b>	<b>BU= Bulk Packing</b>								
	<b>BG= Beige</b>									
	<b>WH= White</b>									

Housing Serie T68Qxxx Pitch 3,00mm
Part No.: <b>T68Q025</b>
Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.04.2009
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	