




**Technical Specification**

Temperature Range: < 105°C  
 Voltage Rating: 300VAC / DC  
 Current Rating: 8~15A  
 Contact Resistance: ≤ 0,01Ω  
 Voltage Rating: 300VAC / DC  
 Insulation Resistance: ≥ 4MΩ  
 Combustion Resistance: ULVWE-1 (FV-0)  
 Material Sleeve (PVC) UL94V-0

**Drawing**

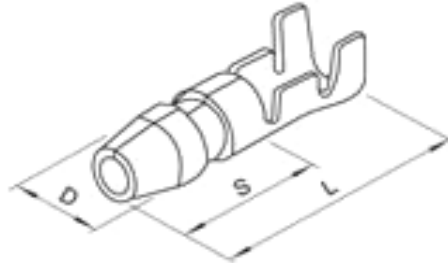

Order Code	Applicable Wire		Material	Thickness (mm)	Dimension		
	mm <sup>2</sup>	AWG			D	L	S
F01	0,5~2,0	20 ~ 14	Brass	0,5	3,5	15,9	7,3
F02	0,3~0,75	22 ~ 18	Brass	0,5	3,96	17,5	8,7
F03	0,5~2,0	20 ~ 14	Brass	0,5	3,96	17,5	8,7

**Ordering Information**

Serie	Order Code	ROHS	Packing			
<b>N31021</b>	<b>Fxx</b>	<b>R</b>	<b>BU</b>			

LXX= Look Dimension Order Code	R= ROHS Conform	BU = Bulk - Ware
	N= NON ROHS Conform	

Bullet Male Type	
Part No.:	<b>N31021</b>
Customer:	

DRW:	Jason	CHKD	Jules	MATL:	Wu	DATE	06.11.2011
APPD:	Join			FINISH	Shieh	Sheet	1 from 1