



EDCON-COMPONENTS




SPECIFICATION:

Current Rating:	0,3 Ampere / 5VDC
Insulator Resistance:	100 Megaohm min. at 500VDC
Dielectric Withstanding:	AC 500V
Operating Temperature:	.-40°C to +105°C
Contact Resistance:	70m Ω max.
Timing:	NON-shorting
Function:	1P2T
Lifetest:	10000 cycles
Contact Material:	PBS
Cover:	SUS Nature
Terminal:	Brass strip Ag plated
Case Material:	Nylon
Knob Material:	Nylon

Drawing

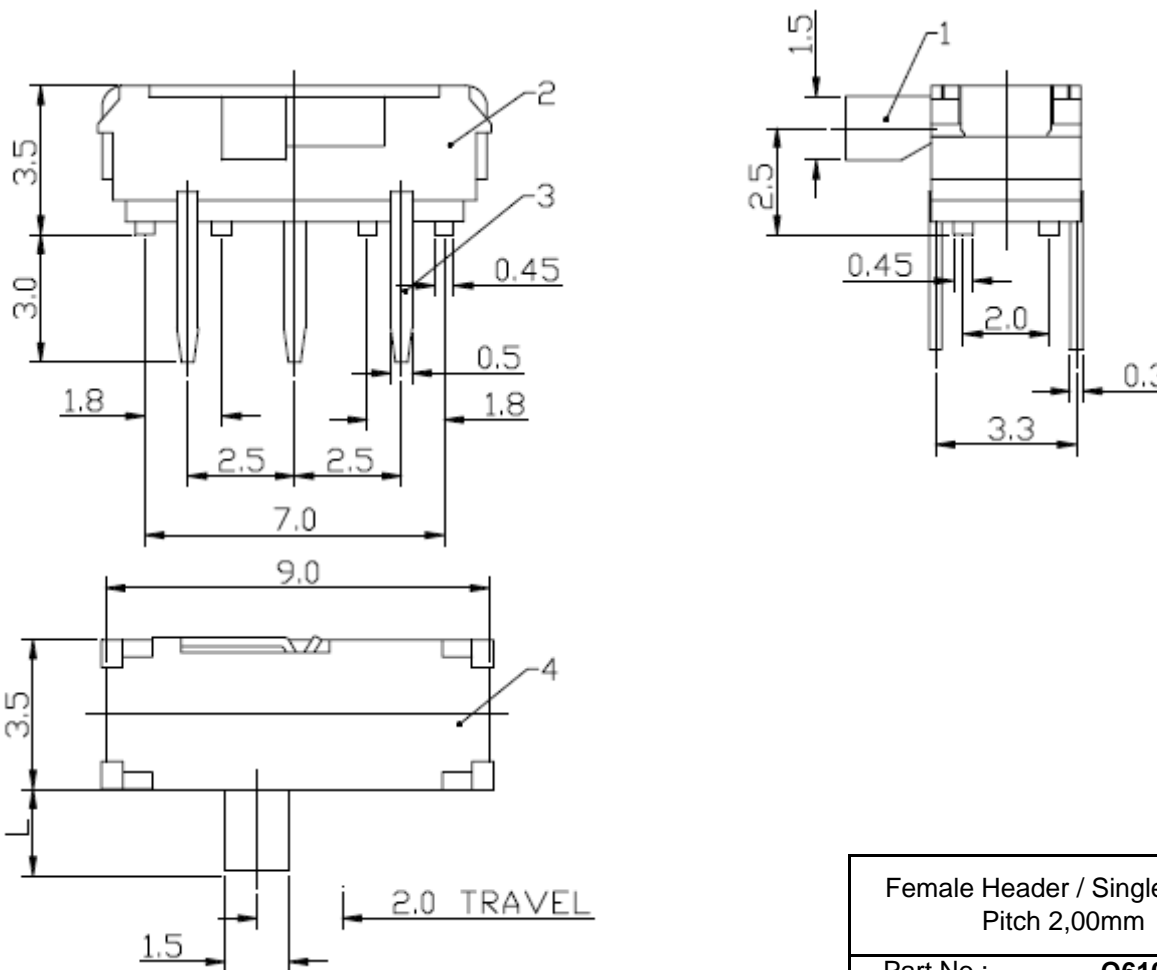


P.C.B Layout

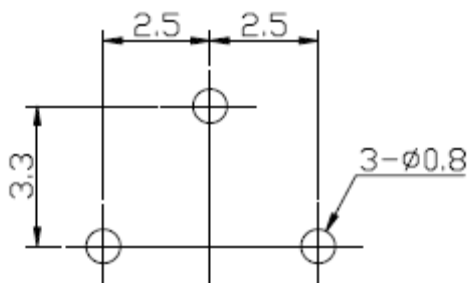

Female Header / Single Row / Pitch 2,00mm	
Part No.:	Q61000
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 2	

EDCON-COMPONENTS



Ordering Informations

Serie	Total height w. Body	Fill with 0	Operating Force	Polarisation Peg	Electrical life	Fill with 0	ROHS	Packing		
Q61000	000	X	000	N	000	X	R	TR102		

031 = 3,1mm		101 = 100gr	N = without Peg	103 = 10000 Cycles		N = non OHS	BU = Bulk Ware
		151 = 150gr	Y = with Peg	503 = 50000 cycles		R = ROHS conform	TY = Tray Packing
		201 = 200gr		104 = 100000 cycles			TR102 = Tape/Reel Packing 1000PCS
		251 = 250gr		105 = 1000000 cycles			
		501 = 500gr					

Female Header / Single Row / Pitch 2,00mm	
Part No.:	Q61000
Customer:	

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	02.02.2014
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 2	