


# EDCON-COMPONENTS



## Technical Description

Rating: DC6V, 0,3A  
 Circuit: 1C-3P  
 Timing: NON-Shorting  
 Travel:  $2,0 \pm 0,1\text{mm}$   
 Contact Resistance: 70 mΩ max.  
 Operating Force: 200gf  $\pm$ 100gf.  
  
 Operating Life: 100000 cycles  
 Insulation resistance: 100MΩ min.at 250VDC  
 Dielectric Strength: 250VAC f. 1 Min.

## Drawing

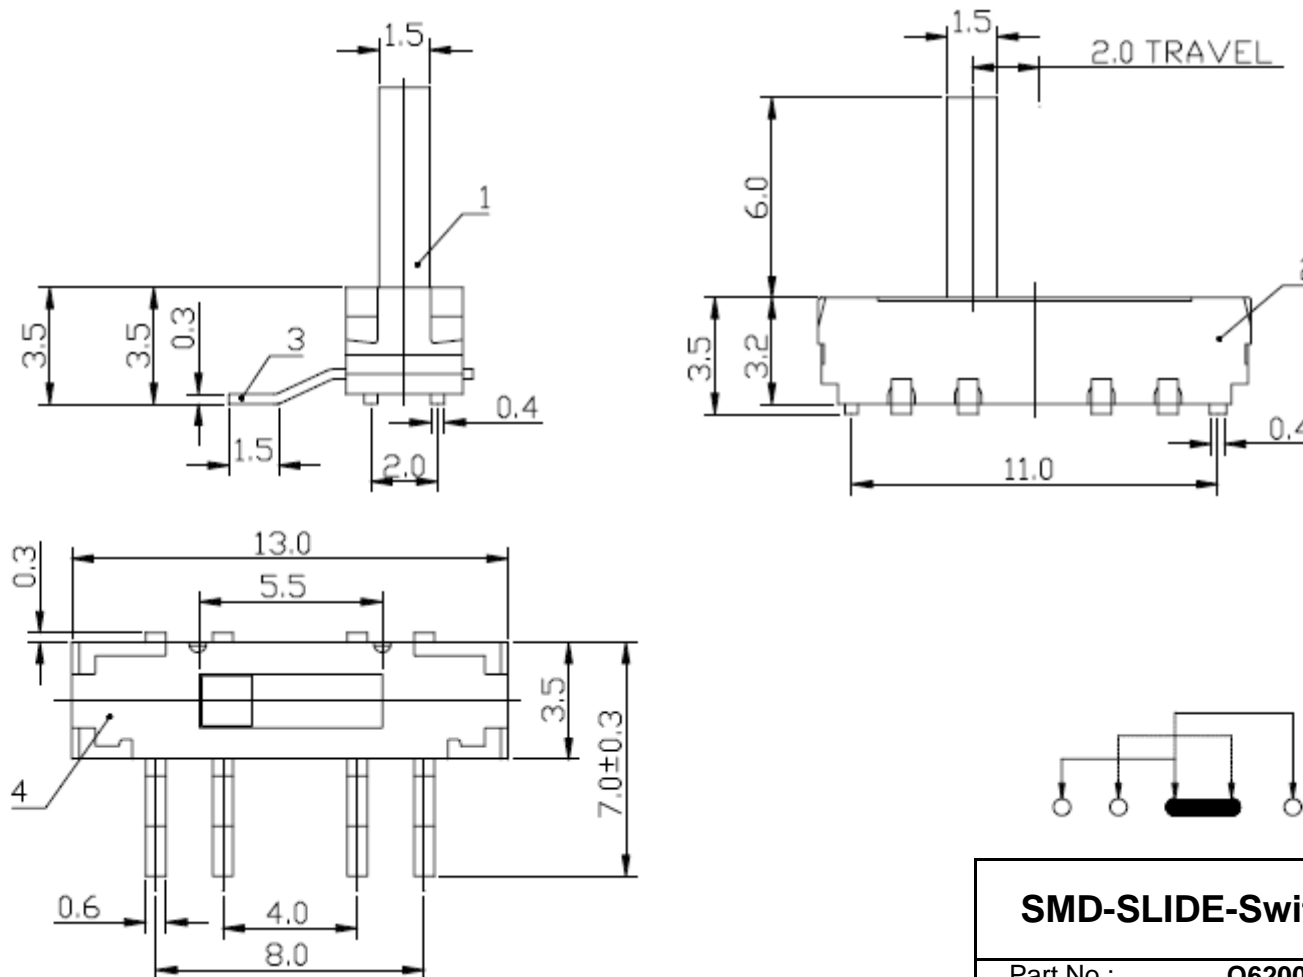

## PCB Layout

## SMD-SLIDE-Switch

Part No.: **Q62009**

Customer:

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	31.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	

# EDCON-COMPONENTS



## Ordering Informations

Serie	Knob Length	Knob Type	Polarisation Peg	Spezial Function	ROHS	Packing				
-------	-------------	-----------	------------------	------------------	------	---------	--	--	--	--

<b>Q62009</b>	<b>F</b>	<b>0</b>	<b>Y</b>	<b>0</b>	<b>R</b>	<b>BU</b>				
---------------	----------	----------	----------	----------	----------	-----------	--	--	--	--

	0= No function	Y= with Peg	0= No function	R= ROHS Conform	BU= Bulk-Ware
					TR= Tape Reel
F= 6,0mm					

**SMD-SLIDE-Switch**

Part No.: **Q62009**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	31.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



**SMD-SLIDE-Switch**

Part No.: **Q62009**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	31.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	Customer: