




EDCON-COMPONENTS






Technical Description

Rating: DC4V, 0,3A
Circuit: 1C-2P
Timing: NON-Shorting
Travel: $2,0 \pm 0,1\text{mm}$
Contact Resistance: 70 m Ω max.
Operating Force: $150 \pm 150\text{gf}$
Operating Life: 10000 cycles

Drawing

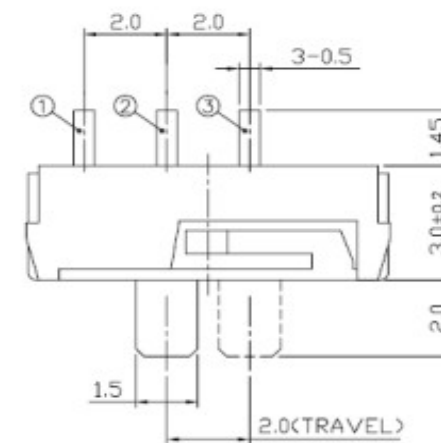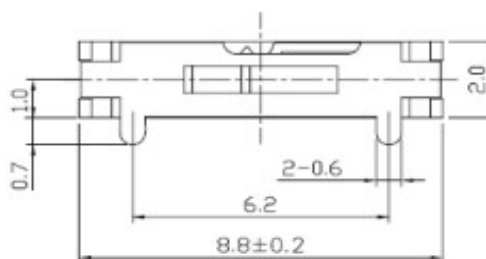

PCB Layout

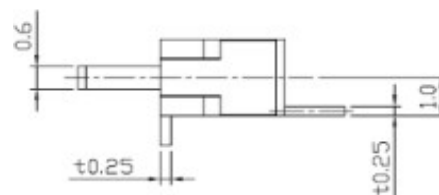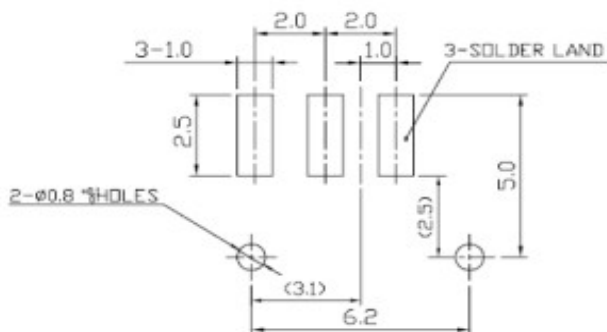

SMD-SLIDE-Switch 2,0mm Height


Part No.: **Q62038**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	Customer:

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Knob Length (H)	Knob Type	Polarisation Peg	Spezial Function	ROHS	Packing				
-------	-----------------	-----------	------------------	------------------	------	---------	--	--	--	--

Q62038	B	0	Y	0	R	TR				
---------------	----------	----------	----------	----------	----------	-----------	--	--	--	--


	0= No function	Y= with Peg	0= No function	R= ROHS Conform	BU= Bulk-Ware
B= 2mm					TR= Tape Reel

**SMD-SLIDE-Switch
2,0mm Height**

Part No.: **Q62038**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.		2 from 3

Customer:



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



**SMD-SLIDE-Switch
2,0mm Height**

Part No.: **Q62038**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	30.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3	Customer: