




EDCON-COMPONENTS






Technical Description

Rating: DC6V, 0,3A
Circuit: 1C-3P
Timing: NON-Shorting
Travel: $2,0 \pm 0,1$ mm
Contact Resistance: 70 mΩ max.
Operating Force:
 Stay $a > b < c$ 250gf ± 100 gf.
 Stay $a < b > c$ 300gf ± 150 gf.
Operating Life: 10000 cycles

Drawing

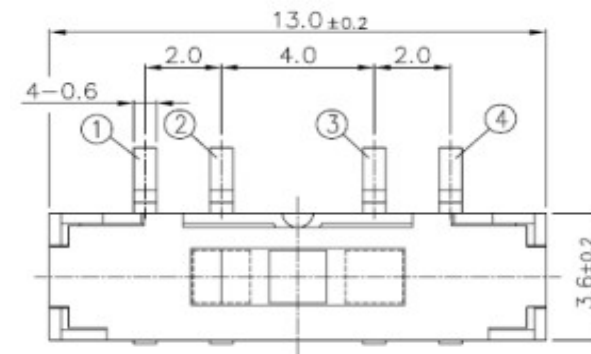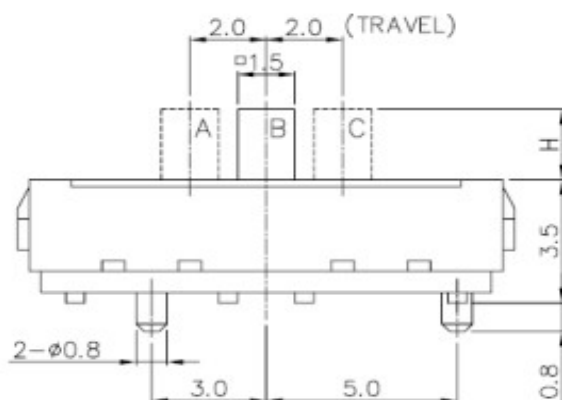

PCB Layout

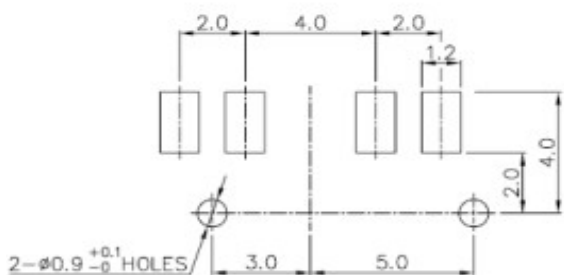

SMD-SLIDE-Switch 3,5mm Height


Part No.: **Q62045**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	31.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	1 from 3	Customer:

www.edcon-components.com

email: info@edcon-components.com

EDCON-COMPONENTS



Ordering Informations

Serie	Knob Length (H)	Knob Type	Polarisation Peg	Spezial Function	ROHS	Packing				
-------	-----------------	-----------	------------------	------------------	------	---------	--	--	--	--

Q62045	A	0	Y	0	R	TR				
---------------	----------	----------	----------	----------	----------	-----------	--	--	--	--

A= 2,0mm	0= No function	Y= with Peg	0= No function	R= ROHS Conform	BU= Bulk-Ware
B= 4,0mm					TR= Tape Reel


**SMD-SLIDE-Switch
3,5mm Height**

Part No.: **Q62045**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	31.08.2016
APPD:	Schumi			FINISH	Jamy		Sheet No.	2 from 3	Customer:

www.edcon-components.com

email: info@edcon-components.com



Soldering Profile Curve

Classification Reflow Profile (JEDEC J-STD-020C)



**SMD-SLIDE-Switch
3,5mm Height**

Part No.: **Q62045**

DRW:	Jason	CHKD	Wilson	MATL:	Wilson	TOLERANCE	Mason	DATE	31.08.2016	Customer:
APPD:	Schumi			FINISH	Jamy		Sheet No.	3 from 3		